




INDEX TO DRAWINGS	
SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	STANDARD PLANS SUMMARY
3 - 4	GENERAL NOTES & LEGEND
5 - 7	WATER POLLUTION AND EROSION CONTROL NOTES
8 - 10	TYPICAL SECTIONS
11	GUARDRAIL DETAILS AND NOTES
12	31" W-BEAM GUARDRAIL WITH STANDARD 8" OFFSET BLOCK
13	MIDWEST GUARDRAIL SYSTEM WITH NO OFFSET BLOCK
14	GUARDRAIL TERMINAL CONNECTORS AND END SECTIONS
15	MGS TRANSITION TO STRONG POST GUARDRAIL
16 - 17	MISCELLANEOUS DETAILS
18	GENERAL ROADWAY IMPROVEMENTS LAYOUT
19 - 21	ROADWAY PLAN
22	RETAINING WALL NO. 2 AND PIPE CULVERT OUTLET PLAN AND PROFILE
23	DRAINAGE PLAN
24	PAVEMENT MARKINGS LEGEND, AND NOTES
25	PAVEMENT MARKING AND TRAFFIC SIGNING PLAN
26	SUPPLEMENTAL PLAQUE AND STREET NAME SIGN DETAIL
27 - 29	CROSS-SECTION
30	LOW SPEED UNDIVIDED HIGHWAY WORK ZONE SIGNING PLAN, NOTES & DETAILS

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
HONOLULU, HAWAII

PLANS FOR
**KAUMUALII HIGHWAY
INTERSECTION IMPROVEMENTS
AT LAUHO ROAD AND KULI ROAD**


PROJECT NO. 50C-01-18
DISTRICT OF KOLOA
ISLAND OF KAUAI

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	1	30

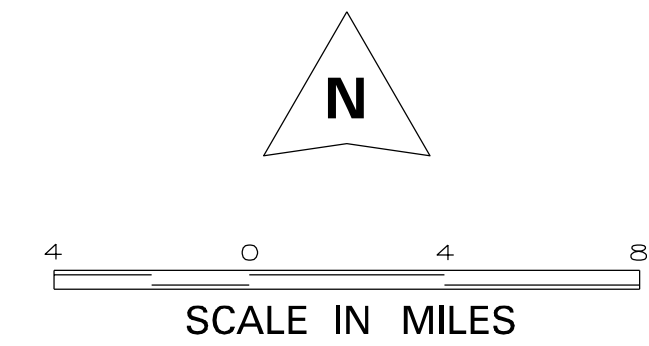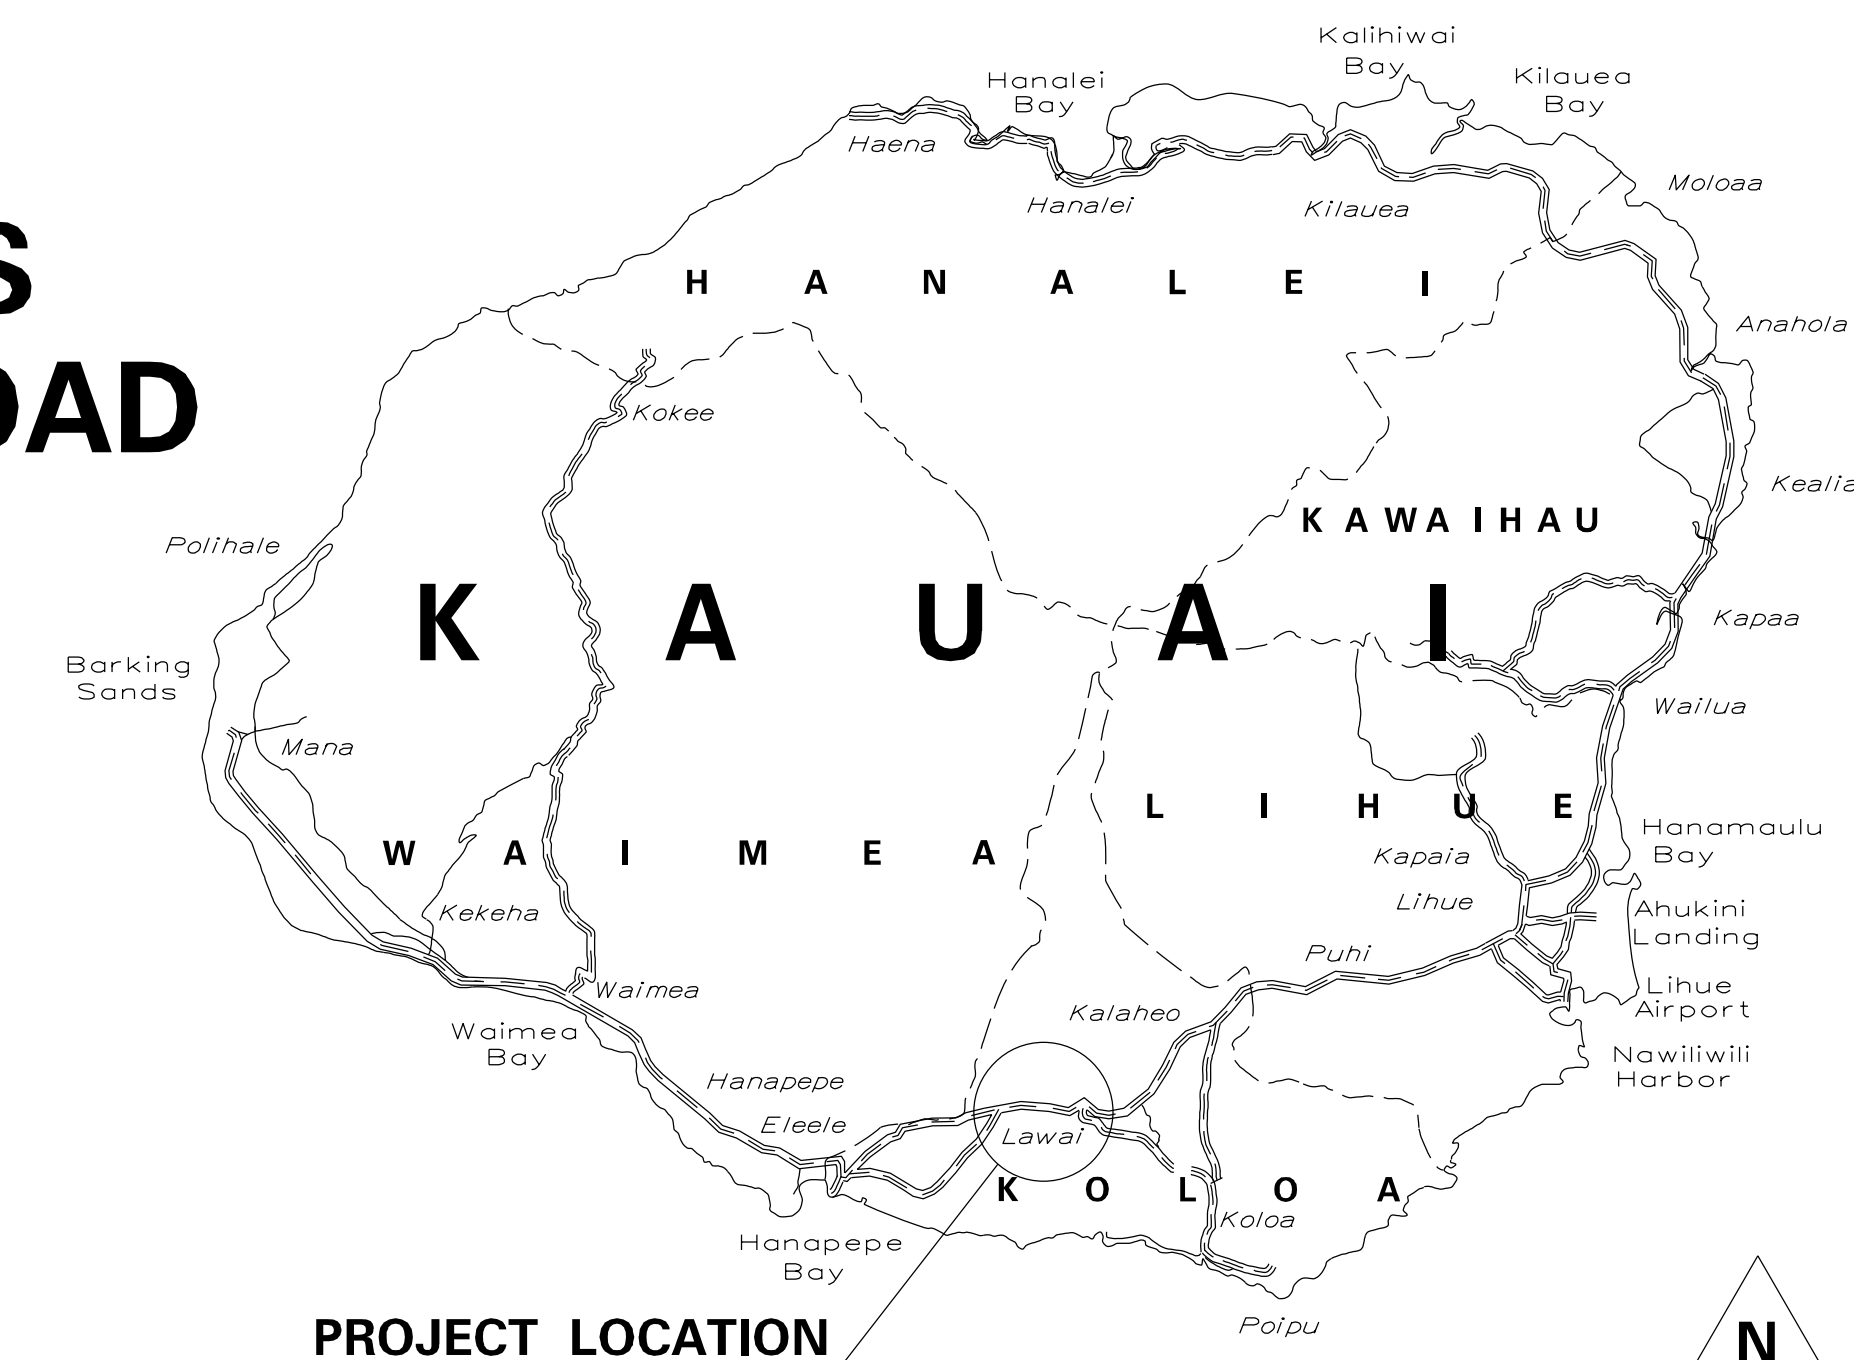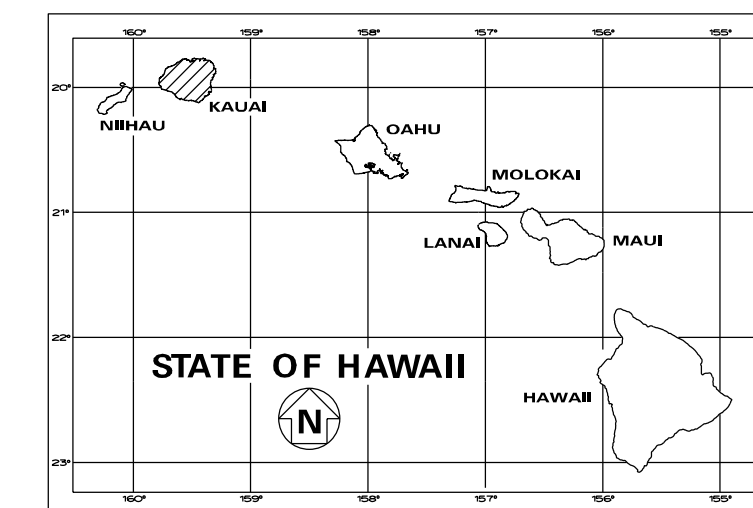


FEDERAL AID PROJECTS PREVIOUSLY CONSTRUCTED OR UNDER CONSTRUCTION

MILE POST 10.83 TO MILE POST 11.05

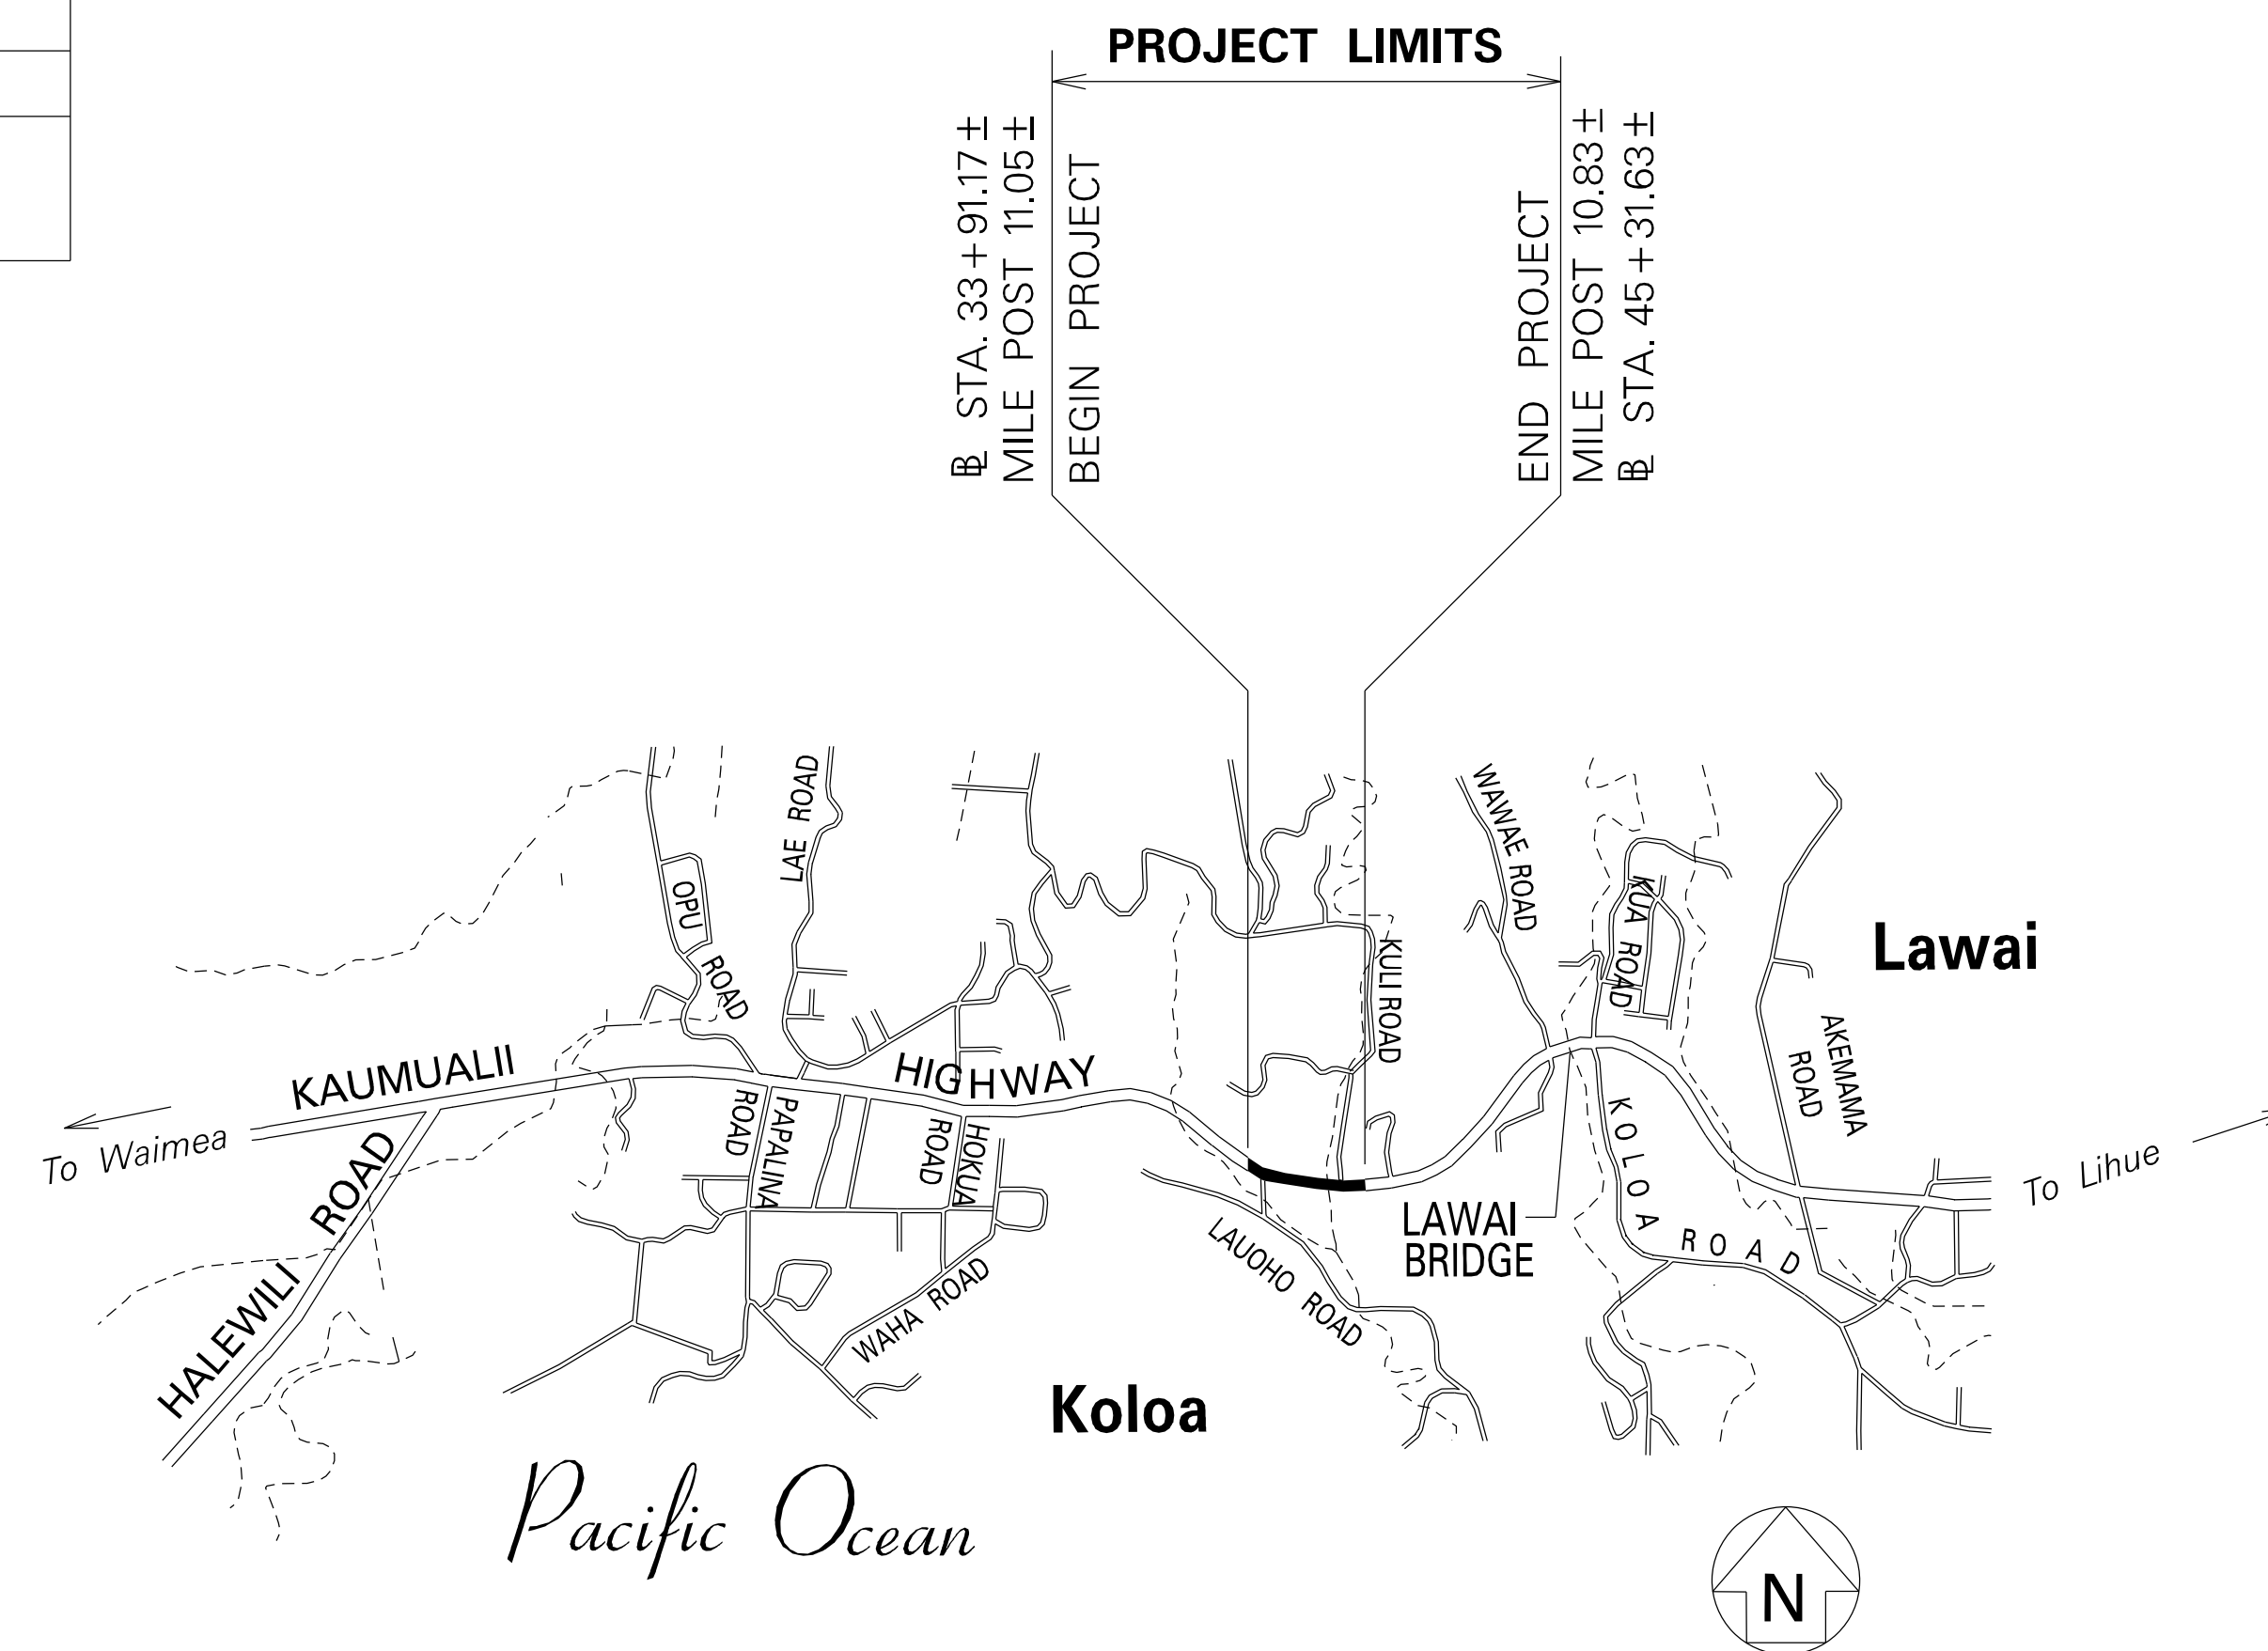

LAYOUT PLAN
GROSS LENGTH OF PROJECT..... 0.22 MILE
NET LENGTH OF PROJECT..... 0.22 MILE



DESIGNED BY _____
MANAGED BY _____
PHONE 241-3000
DATE JAN. 2022

DEPARTMENT OF TRANSPORTATION
STATE OF HAWAII
APPROVED: _____
DIR. OF TRANSPORTATION DATE Jan 21, 2022

STANDARD PLANS SUMMARY

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	2	30

STANDARD PLAN NO.	TITLE	DATE
B-01	NOTES & MISCELLANEOUS DETAILS	05/31/07
B-03	BACKFILL DETAILS AT EARTH RETAINING STRUCTURES	05/31/07
B-12	PRESTRESSED CONCRETE PILES & COMPRESSION SPLICE CAN DETAILS	05/31/07
B-12A	PRESTRESSED CONCRETE PILES, PILE & COMPRESSION SPLICE CAN DETAILS & NOTES	05/31/07
B-12B	PILE INTERACTION DIAGRAM	05/31/07
B-13	PRESTRESSED CONCRETE PILE BUILD-UP DETAILS	05/31/07

D-01	CATTLE GATE	05/31/07
D-02	CHAIN LINK FENCE WITH TOPRAIL	05/31/07
D-03	CHAIN LINK FENCE WITHOUT TOPRAIL	05/31/07
D-04	WIRE FENCE WITH METAL POSTS	05/31/07
D-05	TYPICAL DETAILS OF CURBS AND/OR GUTTERS	05/31/07
D-06	TYPICAL DETAIL OF REINFORCED CONCRETE DROP DRIVEWAY	05/31/07
D-07	CENTERLINE AND REFERENCE SURVEY MONUMENTS	05/31/07
D-08	STREET SURVEY MONUMENT	05/31/07
D-15	CONCRETE SIDEWALK	05/31/07
D-16	P.C.C. BUS PAD	05/31/07
D-17	P.C.C. BUS PAD	05/31/07
D-18	P.C.C. PAVEMENT LAYOUT	05/31/07
D-19	P.C.C. PAVEMENT W/ PERMEABLE BASE JOINT DETAILS	05/31/07
D-20	P.C.C. PAVEMENT W/ PERMEABLE BASE JOINT DETAILS	05/31/07
D-21	P.C.C. LONGITUDINAL JOINT DETAILS	05/31/07
D-22	P.C.C. CONNECTION TO CURBS AND GUTTERS	05/31/07
D-23	JOINTS	05/31/07

L-01	TREE PLANTING	08/16/06
L-02	TREE PLANTING	08/16/06
L-03	TREE TRANSPLANTING	08/16/06
L-04	PALM PLANTING	08/16/06
L-05	SHRUB PLANTING	08/16/06
L-06	LANDSCAPE DETAILS	08/16/06
L-07	LANDSCAPE DETAILS	08/16/06
L-08	LANDSCAPE DETAILS	08/16/06
L-09	LANDSCAPE DETAILS	08/16/06
L-10	LANDSCAPE DETAILS	08/16/06
L-11	PLANTING NOTES	08/16/06
L-12	IRRIGATION DETAILS	08/16/06
L-13	IRRIGATION DETAILS	08/16/06
L-14	IRRIGATION DETAILS	08/16/06
L-15	IRRIGATION DETAILS	08/16/06
L-16	IRRIGATION DETAILS	08/16/06
L-17	IRRIGATION DETAILS	08/16/06
L-18	IRRIGATION DETAILS	08/16/06
L-19	IRRIGATION DETAILS	08/16/06
L-20	IRRIGATION DETAILS	08/16/06
L-21	IRRIGATION DETAILS	08/16/06
L-22	IRRIGATION DETAILS	08/16/06
L-23	IRRIGATION DETAILS	08/16/06
L-24	IRRIGATION NOTES	08/16/06

STANDARD PLAN NO.	TITLE	DATE
H-01A	TYPE A CATCH BASIN	05/31/07
H-01B	TYPE B CATCH BASIN	05/31/07
H-01C	TYPE C CATCH BASIN	05/31/07
H-01D	TYPE D CATCH BASIN	05/31/07
H-01E	CATCH BASIN SECTIONS	05/31/07
H-02A	TYPE A1 CATCH BASIN	05/31/07
H-02B	TYPE B2 CATCH BASIN	05/31/07
H-02C	TYPE C1 CATCH BASIN	05/31/07
H-02D	TYPE D1 CATCH BASIN	05/31/07
H-02E	CATCH BASIN SECTION	05/31/07
H-03	TYPE A,B, AND C STORM DRAIN MANHOLE	05/31/07
H-04	TYPE D STORM DRAIN MANHOLE	05/31/07
H-05	TYPICAL REINFORCING DETAILS FOR DRAINAGE STRUCTURES	05/31/07
H-06	TYPICAL REINFORCING DETAILS FOR DRAINAGE STRUCTURES	05/31/07
H-07	CATCH BASIN AND MANHOLE CASTINGS	05/31/07
H-08	TYPE 1A-9 AND 1A-9P GRATED DROP INLET	05/31/07
H-09	TYPE 2A-9 AND 2A-9P GRATED DROP INLET	05/31/07
H-10	TYPE A-9 OR A-9P STEEL FRAMES	05/31/07
H-11	TYPE A-9 AND A-9P STEEL GRATES	05/31/07
H-12	TYPE 61614P AND 1211214P GRATED DROP INLET	05/31/07
H-13	TYPE 61616P AND 1211216P GRATED DROP INLET	05/31/07
H-14	TYPE 61214P GRATED DROP INLET	05/31/07
H-15	TYPE 1211214, 1211214P, 1211216, 1211216P STEEL FRAME AND GRATES	05/31/07
H-16	TYPE 61614, 61614P, 61616, 61616P STEEL FRAME AND GRATES	05/31/07
H-17	TYPE 61214 STEEL FRAMES AND GRATES	05/31/07
H-18	TYPE 61214P STEEL GRATES	05/31/07
H-19	TYPE 61614B STEEL FRAME AND GRATES	05/31/07
H-20	CEMENT RUBBLE MASONRY STRUCTURES	05/31/07
H-21	CONCRETE AND CEMENT RUBBLE MASONRY STRUCTURES	05/31/07
H-22	INLET/OUTLET STRUCTURE	05/31/07
H-23	INLET/OUTLET STRUCTURE	05/31/07
H-24	FLARED END SECTION FOR CULVERTS	05/31/07
H-25	FLARED END SECTION FOR CULVERTS	05/31/07
H-26	CONCRETE SPILLWAY INLET	05/31/07
H-27	CAP COUPLING DETAILS STANDARD JOINT	05/31/07
H-28	REINFORCED CONCRETE COLLAR & JACKET	05/31/07
H-29	UNDERDRAIN CLEANOUT STEEL FRAME AND COVER	05/31/07
H-30	UNDERDRAIN CONNECTION TO DRAINAGE STRUCTURE	05/31/07

TE-01	SIGN HEIGHT AND LOCATION	07/11/08
TE-1A	SIGN INSTALLATION	07/11/08
TE-02A	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-02B	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-02C	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-03A	GALVANIZED SQUARE TUBE SIGN POST MOUNTING	05/31/07
TE-03B	GALVANIZED SQUARE TUBE SIGN POST MOUNTING	05/31/07
TE-04	REGULATORY SIGNS	07/11/08
TE-05	WARNING SIGNS	07/11/08
TE-06	MISCELLANEOUS SIGNS	07/11/08
TE-07	CONSTRUCTION SIGNS	07/11/08
TE-08	MISCELLANEOUS INTERSECTION SIGNS	07/11/08

STANDARD PLAN NO.	TITLE	DATE
TE-09	BIKE ROUTE SIGN & SUPPLEMENTARY PLATES	07/11/08
TE-10	INTERSTATE ROUTE MARKER	07/11/08
TE-11	STATE ROUTE MARKER AND AUXILIARY MARKERS	07/11/08
TE-12	STATE ROUTE MARKER AND BORDER DETAIL FOR GUIDE SIGNS	07/11/08
TE-12A	ROUTE SIGN ASSEMBLIES	07/11/08
TE-13	STREET NAME SIGN ON MAST ARM	07/11/08
TE-14	MISCELLANEOUS REFLECTOR MARKERS	07/11/08
TE-15	OBJECT MARKERS	07/11/08
TE-16	MILE POSTS	07/11/08
TE-17A	CANTILEVER OVERHEAD SIGN ELEVATION & DETAILS	05/31/07
TE-17B	CANTILEVER SIGN FRAME DETAIL AND SECTION	05/31/07
TE-17C	CANTILEVER SIGN FRAME DETAIL	05/31/07
TE-17D	CANTILEVER SIGN FRAME SECTION	05/31/07
TE-17E	CANTILEVER SIGN FRAME DETAILS	05/31/07
TE-18A	TWO POST OVERHEAD SIGN FRAME ELEVATIONS	05/31/07
TE-18B	TWO POST SIGN FRAMING PLAN SECTION	05/31/07
TE-18C	TWO POST SIGN FRAMING SECTIONS AND DETAILS	05/31/07
TE-18D	TWO POST SIGN FRAME DETAILS	05/31/07
TE-18E	TWO POST SIGN FRAME DETAILS	05/31/07
TE-19A	OVERHEAD SIGN FRAMING SCHEDULE	05/31/07
TE-19B	SIGN POST DRILLED SHAFT FOUNDATION	05/31/07
TE-19C	SPREAD FOOTING	05/31/07
TE-19D	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.1	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.2	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.3	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.4	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.5	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19E	ANCHORAGE DETAILS	05/31/07
TE-19F	ANCHORAGE DETAILS	05/31/07
TE-19G	MISCELLANEOUS SIGN FRAME DETAILS	05/31/07
TE-19H	LUMINAIRE WALKWAY SUPPORT	05/31/07
TE-19J	FIXED MESSAGE LUMINAIRE SUPPORT	05/31/07
TE-19K	MISCELLANEOUS SIGN DETAILS	05/31/07
TE-19L	MISCELLANEOUS SIGN DETAILS	05/31/07
TE-19M	MISCELLANEOUS SIGN FRAME DETAILS	05/31/07
TE-20	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20A	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20B	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20C	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-21A	SIGN BREAKAWAY MOUNTS	05/31/07
TE-21B	SIGN BREAKAWAY MOUNTS	05/31/07
TE-22	LAMINATED ALUMINUM SIGN PANELS (OVERHEAD)	05/31/07
TE-23	LAMINATED ALUMINUM SIGN PANELS (GROUND MOUNTED)	07/11/08
TE-24	SOLID ALUMINUM EXTRUDED SIGN PANEL AND ACCESSORY DETAILS	05/31/07
TE-25	GUIDE SIGNS LUMINAIRE MOUNTINGS	05/31/07
TE-26	RAISED PAVEMENT MARKERS AND STRIPING	07/11/08
TE-27	RAISED PAVEMENT MARKERS AND STRIPING	07/11/08
TE-28	ENTRANCE AND EXIT PAVEMENT MARKINGS	07/11/08
TE-28A	ENTRANCE AND EXIT PAVEMENT MARKINGS	07/11/08
TE-28A	MISCELLANEOUS PAVEMENT MARKINGS	07/11/08
TE-29	PAVEMENT ARROWS AND SYMBOLS	07/11/08
TE-30	PAVEMENT ALPHABETS, NUMBERS & SYMBOLS	07/11/08

STANDARD PLAN NO.	TITLE	DATE
TE-31	PAVEMENT ALPHABETS, NUMBERS & SYMBOLS	07/11/08
TE-32	TYPE I & II TRAFFIC SIGNAL SYSTEM MISC. DETAILS	05/31/07
TE-33	TYPE II TRAFFIC SIGNAL SYSTEM	08/16/06
TE-33A.1	TYPE II TRAFFIC SIGNAL STANDARD	05/31/07
TE-33A.2	TYPE II TRAFFIC SIGNAL STANDARD	05/31/07
TE-34	LOOP DETECTOR DETAILS	07/11/08
TE-35	LOOP DETECTORS & DUCT DETAILS	07/11/08
TE-36	TRAFFIC SIGNAL DETAILS	07/11/08
TE-37	PULLBOX & COVER DETAILS	07/11/08
TE-37A	TYPE "A" TRAFFIC PULLBOX	05/31/07
TE-37B	TYPE "A" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37C	TYPE "B" TRAFFIC PULLBOX	05/31/07
TE-37D	TYPE "B" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37E	TYPE "B" TRAFFIC PULLBOX FOUNDATION	05/31/07
TE-37F	TYPE "C" TRAFFIC PULLBOX	05/31/07
TE-37G	TYPE "C" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37H	TYPE "C" TRAFFIC PULLBOX FOUNDATION	05/31/07
TE-37J	TRAFFIC PULLBOX COVER AND DETAILS	05/31/07
TE-38	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-38A.1	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-38A.2	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-39	METAL GUARDRAIL CONNECTION TO CONCRETE BARRIER	07/11/08
TE-40	CONCRETE BARRIER TRANSITION	05/31/07
TE-40A	CONCRETE BARRIER TRANSITION SECTIONS	05/31/07
TE-41	GUARDRAIL TYPE 4 (RIGID BARRIER)	05/31/07
TE-42	PORTABLE CONCRETE BARRIER	05/31/07
TE-43	PORTABLE CONCRETE BARRIER	05/31/07
TE-44	GUARDRAIL TYPE 4 MISCELLANEOUS DETAILS	07/11/08
TE-45	BARRICADES	07/11/08
TE-46	DELINEATION & PAVEMENT MARKINGS AT NARROW BRIDGES	07/11/08
TE-47	HIGHWAY LIGHT STANDARD	05/31/07

NOTE:
STANDARD PLANS APPLICABLE TO THIS PROJECT ARE INDICATED BY A "●" NEXT TO THE STANDARD PLAN NO. (FOR EXAMPLE: D-07 ●)

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

STANDARD PLANS SUMMARY

KAUAI HIGWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18

Date: January 2022

SHEET No. 1 OF 1 SHEETS

SURVEY PLOTTED BY _____ DATE _____
 DRAWN BY _____
 DESIGNED BY _____
 QUANTITIES BY _____
 CHECKED BY _____

GENERAL NOTES

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	3	30

1. The scope of work for this project includes widening the existing roadway pavement to accommodate the construction left-turn lane; removing and installing pavement marking; constructing geo-synthetic reinforced soil (GRS) retaining wall, removing and installing metal guardrail; removing and installing traffic signs; constructing grated drop inlet, storm drain manhole, reinforced concrete pipe culvert, asphalt concrete swale and grouted rubble paving; cold planing and resurfacing; hydro-mulch seeding of dressed shoulders.
2. The Contractor is reminded of the requirements of Subsection 105.16 - Subcontracts.
3. The Contractor's attention is directed to the following Sections of the Special Provisions: Subsection 107.06 - Contractor Duty Regarding Public Convenience; Subsection 104.11 - Utilities and Services; and Section 645 - Work Zone Traffic Control.
4. At the end of each day's work, the Contractor shall remove all equipment and other obstructions to permit free and safe passage of public traffic.
5. The existence and location of underground utilities, manholes, monuments and structures as shown on the plans are from the latest available data but the accuracy is not guaranteed. The encountering of other obstacles during the course of work is possible. The Contractor shall be held liable for any damages incurred to the existing facilities and/or improvements as a result of his operations.
6. All lanes shall be open to traffic during the hours from 6:00 A.M. to 8:00 P.M. Only one lane of highway shall be closed at any other time. Night working hours are specified in Section 107 of the Special Provisions. Failure of the Contractor to open all lanes of traffic during the times specified above shall result in assessment of rental fees as specified in Section 108.09 of the Special Provisions.
7. The Contractor shall notify the Engineer in writing, two (2) weeks prior to starting his operations.
8. Smooth riding connections shall be constructed at all limits of construction, including the beginning and end of project, connecting approaches, side streets and driveways as shown on the plans.
9. Trimming and dressing of shoulder, sidewalk and bus turnout shall consist of clearing, grubbing, grading, reshaping and compacting the unpaved shoulders with suitable material as shown on the plans and/or as directed by the Engineer. Suitable materials shall include materials from roadway excavation, including topsoil and base material therefrom, and if necessary, additional materials from borrow outside the limits of the right of way. Asphalt concrete removed from cold planing, reconstruction and roadway excavation shall not be used for dressing of shoulder, sidewalk or bus turnout. This work shall be considered incidental to the various contract items.
10. Existing drainage system will be functional at all times during construction. The Contractor shall furnish materials, equipment, labor, tools and incidentals necessary to maintain flow. This work shall be considered incidental to various contract items.
11. The Contractor shall provide for access to and from all existing driveways, sidewalks and ADA access routes, and side streets and cross streets at all times. This work shall be considered incidental to the various contract items.
12. Prior to his paving operations, the Contractor shall be responsible for locating, preserving and marking all utility & highway facilities that will require adjustments to the new finished pavement grade. Additionally, the Contractor shall submit to the Engineer a list of all items, including water, drainage, sewer, electrical, telephone and cable utilities to be adjusted to the new finished grade.
13. Contractor shall exercise extreme caution to preserve BENCHMARKS (Survey Monuments). Whenever the center of a Survey Monument is less than three (3) feet from the edge of construction, the Contractor shall retain a Licensed Land Surveyor to reference the location of said Survey Monument.

Benchmarks that are disturbed or destroyed shall be restored under a Licensed Land Surveyor's direction. Copies of field notes, descriptions and new values of the new benchmark shall be sent to the Department of Transportation, Highways Division, Cadastral Engineering Section, for review and approval prior to construction.
14. All new reference survey monuments shall be set under a Licensed Land Surveyor's direction. Copies of field notes, descriptions and values of the new survey monuments shall be sent to the Department of Transportation, Highways Division, Cadastral Engineering Section, for review and approval prior to construction.
15. Any work specified in the contract but not listed separately in the proposal schedule shall be considered incidental to other various contract items and shall not be paid for separately.
16. All asphalt concrete materials from cold planing, reconstruction and roadway excavation operations shall become the property of the Contractor. The Contractor shall remove and dispose these materials and shall be considered incidental to various contract items.
17. No material and/or equipment shall be stockpiled or otherwise stored within the highway right-of-way except at locations designated in writing and approved by the Engineer. If use of location is approved by the Engineer, the Contractor shall obtain a permit to use the property within the highway right-of-way from the State Highways Division at telephone no. 241-3000.
18. Prior to construction, the Contractor shall contact the various utility agencies for location of existing utilities within the project limits. The Contractor shall locate and protect all existing utilities whether or not shown on the plans. Any costs incurred by damages to existing utilities will be borne by the Contractor. Contractor shall request from One-Call Center, Ph: 1-866-423-7287. The Contractor shall also call the County of Kauai, Department of Water, Ph: 245-5439 and the Wastewater Division, Ph: 241-6642 for toning waterlines and sewerlines respectively.
19. Removal and disposal of existing a.c. pavement, subbase/base course materials, pavement markings, shall not be paid for separately but shall be considered incidental to the various contract items.
20. Removal and disposal of waste materials resulting in the construction of geo-synthetic reinforced soil (GRS) retaining wall shall not be paid for separately but shall be considered incidental to the various contract items.
21. Removal and disposal of steel rail elements, W-beam sections and backfilling of resulting holes shall be considered incidental to various contract items.
22. No section where guardrails have been removed shall be left unattended at the end of each work day. Open sections shall be shielded by Portable Concrete Barrier or as directed by the Engineer. For Portable Concrete Barrier details, refer to Standard Plans TE-42 and TE-43. Furnishing, installing and maintaining of these devices shall be paid under Item No. 694.1000 - Contractor Furnished Portable Concrete Barrier.
23. All saw cutting work shall be considered incidental to Item 401.0400 - Hot Mix Asphalt Pavement, Mix No. IV and will not be paid for separately.
24. Earth swale shall be graded to drain. Graded swales shall be grassed. This work shall be considered incidental to Item 641.1000 - Hydro-mulch Seeding and will not be paid separately.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
QUANTITIES BY	DESIGNED BY	
CHECKED BY		

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL NOTES AND LEGEND
KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18

Date: January 2022







































SHEET No. 1 OF 2 SHEETS

GENERAL NOTES (cont.)

25. Removal and disposal of existing drainage culvert and backfilling of suitable materials shall be considered incidental to various contract items.
26. Slope protection should be established as soon as cut or fill slope is completed to reduce erosion potential.
27. The Contractor, at his own expense, shall keep the project area and surrounding area free from dust nuisance.
28. No Contractor shall perform any grading operations so as to cause falling rocks, soil or debris in any form to fall, slide or flow onto adjoining properties, streets or natural watercourse.
29. No grading work shall be done on Saturdays, Sundays and Holidays.
30. Temporary measures to control erosion and other pollutants shall be placed before any earth moving phase of the grading is initiated. Temporary erosion controls shall not be removed before permanent erosion controls are in place and established. Temporary erosion control procedures shall be submitted to the Engineer for review and approval. This work shall be considered incidental to various contract items.
31. Should historic remains such as artifacts, burials, concentrations of shell or charcoal be encountered during construction activities, work shall cease in the immediate vicinity of the find. The Contractor shall immediately notify the Planning Department and the State Historic Preservation Division at 241-3690, which will assess the significance of the find and recommend the appropriate mitigation measures, if necessary.
32. All workers within the State right-of-way who are exposed to either vehicles using the roadway or to construction equipment shall wear high-visibility safety apparel that meets the Performance Class 2 or 3 requirements of ANSI/ISEA 107-2004. "Workers" is defined as people on foot whose duties place them with the State right-of-way, such as, but not limited to construction and maintenance forces, equipment operators, survey crews, utility crews, responders to incidents (e.g., EMT and Firemen), and law enforcement personnel directing traffic, investigating accidents, handling lane closures and obstructed roadways.
33. No material or equipment shall be stored within the County Right-of-Way.
34. A Road Permit is required from the County "Department of Public Works" for the construction and warning sign installation within County Right-of-Way. Three (3) sets of the approved plans shall be submitted at the time when the Road Permit is applied for. Road Permit Application can be obtained from County website. Additionally, the applicant will need to provide Certificate of Liability Insurance naming the County as additionally insured. This work shall be considered incidental to various contract items.
35. During widening operation, the Contractor shall modify the existing travel lanes by temporary shifting the existing pavement marking and striping. Minimum lane width shall be ten feet (10'). All signs and panels shall conform to the latest edition of the "Manual on Uniform Traffic Control Devices for Street and Highways". Temporary pavement marking and striping shall conform to Section 629 - Pavement Marking of the Special Provisions. This work shall be considered incidental to Item No. 645.1000 - Traffic Control and will not be paid separately.
36. Preparation of subgrade and construction of asphalt concrete swales shall be considered incidental to Item No. 401.0400 - HMA Pav't., Mix No. IV and will not be paid separately.
37. Structure excavation and backfill of Storm Drain Manhole (SDMH), Grated Drop Inlet (GDI), Grouted Rubble Paving and Concrete Footing of GRS Retaining Wall No. 2 shall be considered incidental to various contract items and will not be paid separately.
38. Structure excavation and trench backfill of Reinforced Concrete Pipe Culvert shall be considered incidental to various contract items and will not be paid separately.
39. A Grading Permit is required from the County "Department of Public Works" for the disposal of wasted excavated materials. Disposal site shall comply with the County's Sediment and Erosion Control Ordinances No. 808. This work shall be considered incidental to Item 203.1000 - Roadway Excavation and will not be paid separately.
40. Removal and disposal of existing signs shall be considered incidental to various contract items.
41. New utility pole location and Highway Right-of-Way to be identified and surveyed by the Contractor. This work shall be considered incidental to various contract items.
42. Furnishing of materials and installing twelve inch long stakes/pins to secure erosion control matting on the slope shall be considered incidental to Item No. 663.0100 - Erosion Control Matting and will not be paid separately.

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	4	30

LEGEND

-  Cold Plane
-  Pavement Widening
-  Existing Power Pole
-  Existing Electric Manhole
-  Adjusted Elec. MH Frame/Cover
-  Existing Electric Pullbox
-  Existing Telephone Manhole
-  Adjusted Tel. MH Frame/Cover
-  Existing Telephone Pullbox
-  Existing 12" Water Line
-  Existing Water Manhole
-  Adjusted Water MH Frame/Cover
-  Existing Water Air Valve
-  Adjusted Water Air Valve
-  Existing Water Valve Box
-  Adjusted Water Valve Box
-  Existing Water Meter Box
-  Adjusted Water Meter Box
-  New Type "X" Water Meter Box
-  Existing Traffic Sign
-  New Traffic Sign
-  Existing Metal Guardrail
-  New Metal Guardrail
-  Existing Fire Hydrant
-  Existing Sewer Line
-  New 12" Sewer Line
-  Existing Sewer Manhole
-  Adjusted Sewer Manhole
-  New Sewer Manhole
-  Existing Monument
-  Adjusted Monument
-  New Monument
-  Existing 24" Drain Line
-  Existing Storm Drain Manhole
-  Adjusted Storm Drain Manhole
-  Existing Grated Drop Inlet
-  New Grated Drop Inlet
-  Adjusted/Reconstructed Drain Inlet or Replaced Steel Gate

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	X
DESIGNED BY	CHECKED BY	
QUANTITIES BY		
NO.		

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL NOTES AND LEGEND

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Date: January 2022

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	5	30

WATER POLLUTION AND EROSION CONTROL NOTES:

A. GENERAL:

1. See Special Provisions Section 209 - Water Pollution and Erosion Control. Section 209 describes but is not limited to: submittal requirements; scheduling of a water pollution and erosion control conference with the Engineer; construction requirements; method of measurement; and basis of payment. In addition, Appendix A lists potential pollutant sources and corresponding BMPs used to mitigate the pollutants.
2. Follow the guidelines in the current HDOT Construction Best Management Practices Field Manual in developing, installing and maintaining the Best Management Practices (BMP) for the project. For any conflicting requirements between the Manual and applicable bid documents, the applicable bid documents will govern. Should a requirement not be clearly described within the applicable bid documents, the Contractor shall notify the Engineer immediately for interpretation. For the purposes of clarification under Note A.2, "applicable bid documents" include the construction plans, standard specifications, Special Provisions, Permits, and the Storm Water Pollution Prevention Plan (SWPPP) when applicable.
3. Follow the guidelines in the Honolulu's City & County "Rules Relating to Soil Erosion Standards and Guidelines" along with applicable Soil Erosion Guidelines for projects on Maui, Molokai, Kauai, and Hawaii.
4. The Engineer may assess liquidated damages of up to \$27,500 for non-compliance of each BMP requirement and each requirement stated in Section 209 and special provisions, for every day of non-compliance. There is no maximum limit on the amount assessed per day.
5. The Engineer will deduct the cost from the progress payment for all citations received by the Department for non-compliance, or the Contractor shall reimburse the State for the full amount of the outstanding cost incurred by the State.
6. If necessary, install a rain gage prior to any field work including the installation of any site-specific best management practices. The rain gage shall have a tolerance of at least 0.05 inches of rainfall. Install the rain gage on the project site in an area that will not deter rainfall from entering the gage opening. Do not install in a location where rain water may splash into rain gage. The rain gage installation shall be stable and plumbed. Do not begin field work until the rain gage is installed and site-specific best management practices are in-place.
7. Submit Site-Specific BMP Plan to the Engineer along with a completed Site-Specific BMP Review Checklist within 30 calendar days of contract execution. The Site-Specific BMP Review Checklist may be obtained from <http://www.stormwaterhawaii.com>.

B. WASTE DISPOSAL:

1. **Waste Materials**
Collect and store all waste materials in a securely lidded metal dumpster or roll off container with cover to keep rain out or loss of waste during windy conditions. The dumpster shall meet all local and State solid waste management regulations. Deposit all trash and construction debris from the site in the dumpster. Empty the dumpster weekly or when the container is two-thirds full, whichever is sooner. Do not bury construction waste materials onsite. The Contractor's supervisory personnel shall be instructed regarding the correct procedure for waste disposal. Post notices stating these practices in the office trailer, on a weatherproof bulletin board, or other accessible location acceptable to the Engineer. The Contractor shall be responsible for seeing that these procedures are followed. Submit the Solid Waste Disclosure Form for Construction Sites to the Engineer within 30 calendar days of contract execution. Provide a copy of all the disposal receipts from the facility permitted by the Department of Health to receive solid waste to the Engineer monthly. This should also include documentation from any intermediary facility where solid waste is handled or processed.
2. **Hazardous Waste**
Dispose all hazardous waste materials in the manner specified by local or State regulations and by the manufacturer. The Contractor's site personnel shall be instructed in these practices and shall be responsible for seeing that these practices are followed.

3. **Sanitary Waste**
Collect all sanitary waste from the portable units a minimum of once per week, or as required. Position sanitary facilities where they are secure and will not be tipped over or knocked down.

C. EROSION AND SEDIMENT CONTROL INSPECTION AND MAINTENANCE PRACTICES:

1. For projects with an NPDES Permit for Construction Activities, inspect at the following intervals. For construction areas discharging to nutrient or sediment impaired waters, inspect all control measures at least once each week and within 24 hours of any rainfall event of 0.25 inches or greater within a 24 hour period. For construction areas discharging to waters not impaired for nutrient or sediments, inspect all control measures weekly. Inspections are only required during the project's normal working hours. The discharge point water classification may be found in the SWPPP.
2. For projects without an NPDES Permit for Construction Activities, inspect all control measures weekly.
3. Maintain all erosion and sediment control measures in good working order. If repair is necessary, initiate repair immediately and complete by the close of the next work day if the problem does not require significant repair or replacement, or if the problem can be corrected through routine maintenance. When installation of a new erosion or sediment control or a significant repair is needed, install the new or modified control or complete the repair no later than 7 calendar days from the time of discovery. "Immediately" means the Contractor shall take all reasonable measures to minimize or prevent discharge of pollutants until a permanent solution is installed and made operational. If a problem is identified at a time in the day in which it is too late to initiate repair, initiation of repair shall begin on the following work day.
4. Remove built-up sediment from silt fence when it has reached one-third the height of the fence. Remove sediment from other perimeter sediment control devices when it has reached one-half the height of the device.
5. Inspect silt screen or fence for depth of sediment, tears, to verify that the fabric is securely attached to the fence posts or concrete slab and to verify that the fence posts are firmly in the ground. Inspect and verify the bottom of the silt screen is buried a minimum of 6 inches below the existing ground.
6. Inspect temporary and permanent seeding and planting for bare spots, washouts and healthy growth.
7. Complete and submit to the Engineer a maintenance inspection report within 24 hours after each inspection.
8. Provide a stabilized construction entrance at all points of exit onto paved roads to reduce vehicle tracking of sediments. Include stabilized construction entrance in the Water Pollution, Dust, and Erosion Control submittals. Minimum length should be 50 feet. Minimum width should be 30 feet. Minimum depth should be 12 inches or as recommended by the soils engineer and underlain with geo-textile fabric. If minimum dimensions cannot be met, provide other stabilization techniques that remove sediment prior to exit. Clean the paved street adjacent to the site entrance daily or as required to remove any excess mud, cold-planned materials, dirt or rock tracked from the site. Do not hose down the street without containing or vacuuming wash water. Cover dump trucks hauling material from the construction site with a tarpaulin. Remove sediment tracked onto the street, sidewalk, or other paved area by the end of the day in which the track-out occurs.
9. Include designated Concrete Washout Area(s) in the Water Pollution, Dust, and Erosion Control submittals.
10. Submit the name of a specific individual designated responsible for inspections, maintenance and repair activities and filling out the inspection and maintenance report.
11. Personnel selected for the inspection and maintenance responsibilities shall receive training from the Contractor. They shall be trained in all the inspection and maintenance practices necessary for keeping the erosion and sediment controls used onsite in good working order.

ORIGINAL PLAN	DATE
DESIGNED BY	2/20/24
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No.: 50C-01-18

Date: January 2022

SHEET No. 1 OF 3 SHEETS

WATER POLLUTION AND EROSION CONTROL NOTES (Cont.):

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	6	30

12. Contain, remove, and dispose slurry generated from saw cutting of pavement in accordance with approved BMP practices. Do not allow discharge into the drainage system or State waters.
13. For projects with an NPDES Permit for Construction Activities, immediately initiate stabilizing exposed soil areas upon completion of earth-disturbing activities for areas where earth-disturbing activities have permanently or temporarily ceased. Earth-disturbing activities have permanently ceased when clearing and excavation within any area of the construction site that will not include permanent structures has been completed. Earth-disturbing activities have temporarily ceased when clearing, grading, and excavation within any area of the site that will not include permanent structures will not resume (i.e., the land will be idle) for a period of 14 or more calendar days, but such activities will resume in the future. For construction areas discharging into waters not impaired for nutrients sediments, complete initial stabilization within 14 calendar days after the temporary or permanent cessation of earth-disturbing activities. For construction areas discharging into nutrient or sediment impaired waters, complete initial stabilization within 7 calendar days after the temporary or permanent cessation of earth-disturbing activities. Classification of water at the discharge point may be found in the SWPPP.
14. For projects without an NPDES Permit for Construction Activities, complete initial stabilization within 14 calendar days after the temporary or permanent cessation of earth-disturbing activities.

- b. Fertilizers:
Apply fertilizers used only in the minimum amounts recommended by the manufacturer and federal, state, and local requirements. Avoid applying just before a heavy rain event. Apply at the appropriate time of year for the location, and preferably timed to coincide as closely as possible to the period of maximum vegetation uptake and growth. Once applied, work fertilizer into the soil to limit exposure to storm water. Do not apply to storm conveyance channels with flowing water. Storage shall be in a covered shed or in an area where fertilizer will not come into contact with precipitation or stormwater. Transfer the contents of any partially used bags of fertilizer to a sealable plastic bin to avoid spills.
- c. Paints:
Seal and store all containers when not required for use. Do not discharge excess paint to the drainage system, sanitary sewer system, or State waters. Dispose properly according to manufacturers' instructions and State and local regulations.
- d. Concrete Trucks:
Washout or discharge concrete truck drum wash water only at a designated site as far as practicable from storm drain inlets or State waters. Do not discharge water in the drainage system or State waters. Disposal by percolation is prohibited. Clean disposal site as required or as requested by the Engineer.

D. GOOD HOUSEKEEPING BEST MANAGEMENT PRACTICES:

1. Materials Pollution Prevention Plan

- a. Applicable materials or substances listed below are expected to be present onsite during construction. Other materials and substances not listed below shall be added to the inventory.

Concrete	Cleaning Solvents
Detergents	Wood
Paints (enamel and latex)	Masonry Block
Metal Studs	Herbicides and Pesticides
Tar	Curing Compounds
Fertilizers	Adhesives
Petroleum Based Products	

- b. Use Material Management Practices to reduce the risk of spills or other accidental exposure of materials and substances to storm water runoff. Make an effort to store only enough product as is required to do the job.
- c. Store all materials stored onsite in a neat, orderly manner in their appropriate containers and if possible under a roof or other enclosure.
- d. Keep products in their original containers with the original manufacturer's label.
- e. Do not mix substances with one another unless recommended by the manufacturer.
- f. Whenever possible, use a product up completely before disposing of the container.
- g. Follow manufacturer's recommendations for proper use and disposal.
- h. Conduct a daily inspection to ensure proper use and disposal of materials onsite.

2. Hazardous Material Pollution Prevention Plan

- a. Keep products in original containers unless they are not resealable.
- b. Retain original labels and Safety Data Sheets (SDS), formerly Material Safety Data Sheets (MSDS).
- c. Dispose of surplus products according to manufacturers' instructions and local and State regulations.

3. Onsite and Offsite Product Specific Plan

The following product specific practices shall be followed onsite:

- a. Petroleum Based Products:
Monitor all onsite vehicles for leaks and perform regular preventive maintenance to reduce the chance of leakage. Store petroleum products in tightly sealed containers which are clearly labeled. Apply asphalt substances used onsite according to the manufacturer's recommendation.

4. Spill Control Plan

- a. Post a spill prevention plan to include measures to prevent and clean up each spill.
- b. The Contractor shall be the spill prevention and cleanup coordinator. Designate at least three site personnel who shall receive spill prevention and cleanup training. These individuals shall each become responsible for a particular phase of prevention and cleanup. Post the names of responsible spill personnel in the material storage area on a weatherproof bulletin board or other accessible location acceptable to the Engineer and in the office trailer onsite.
- c. Clearly post manufacturers' recommended methods for spill cleanup. Make site personnel aware of the procedures and the location of the information and cleanup supplies.
- d. Keep ample materials and equipment necessary for spill cleanup in the material storage area onsite.
- e. Clean up all spills immediately after discovery.
- f. Keep the spill area well ventilated. Personnel shall wear appropriate protective clothing to prevent injury from contact with a hazardous substance.
- g. Report spills of toxic hazardous material to the appropriate State or local government agency, regardless of the size. Where a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under either 40 CFR Part 110, 40 CFR Part 117, or 40 CFR Part 302 occurs during a 24-hour period, the Contractor shall notify the Engineer as soon as the Contractor has knowledge of the discharge. The Engineer will notify the National Response Center (NRC) at (800) 424-8802, the Clean Water Branch during regular business hours at 586-4309, and the Hawaii State Hospital Operator at 247-2191 and the Clean Water Branch (DOH-CWB) via email at cleanwaterbranch@doh.hawaii.gov during non-business hours immediately. The Contractor shall also provide to the Engineer, within 7 calendar days of knowledge of the release, a description of the release, the circumstances leading to the release, and the date of the release. The Engineer will provide this information to the DOH-CWB. The Engineer will provide information to the NRC if requested.

ORIGINAL PLAN	DATE	2/20/24
SURVEY PLOTTED BY	DESIGNED BY	
NOTED BY	CHECKED BY	
QUANTITIES BY		

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No.: 50C-01-18

Date: January 2022

WATER POLLUTION AND EROSION CONTROL NOTES (Cont.):

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	7	30

E. PERMIT REQUIREMENTS:

1. The calculated land disturbance area for this project based on the construction plans is 0.47 acres not including Contractor Staging and Storage areas. If the total of the disturbed area and the Contractor Staging and Storage area is one acre or greater, the Contractor shall obtain the NPDES Construction Activities Permit using HDOT's latest SWPPP template. See Hawaii Administrative Rules Chapter 11-55, Appendix C for the definition of land disturbance. The Contractor shall be responsible for obtaining the required NPDES Construction Activities Permit and complying with the requirements of HAR 11-55 including, but not limited to:

- a. Deadlines for initiating and completing initial stabilization
- b. Increased inspection frequency and installation of rain gage if applicable
- c. Deadlines to initiate and complete repairs to BMPs
- d. Reporting requirements and corrective action reports

2. Comply with all applicable State and Federal Permit conditions.

F. SITE-SPECIFIC BMP REQUIREMENTS:

Each BMP below is referenced to the corresponding section of the current HDOT Construction Best Management Practices Field Manual and appropriate Supplemental Sheets. The Manual may be obtained from the HDOT Statewide Stormwater Management Program Website at <http://www.stormwaterhawaii.com/resources/contractors-and-consultants> under Construction Best Management Practices Field Manual. Supplemental BMP sheets are located at <http://stormwaterhawaii.com/resources/contractors-and-consultants/storm-water-pollutionprevention-plan-swppp/> under Concrete Curing and Irrigation Water.

The requirements for Water Pollution, Dust, and Erosion Control submittals are included in Section 209 of the Hawaii Standard Specifications for Road and Bridge Construction dated 2005 and applicable Special Provisions. A list of pollutant sources and corresponding BMP used to mitigate the pollutants are included in Section 209 of the Special Provisions under Appendix A.

Follow the requirements below:

1. Protect all Drainage Inlets receiving runoff from disturbed areas (SC-2).
2. Contain on-site runoff using Perimeter Sediment Controls
 - a. SC-1 Silt Fence
 - b. SC-5 Vegetated Filter Strips and Buffers
 - c. SC-8 Compost Filter Berm
 - d. SC-13 Sandbag Barrier
 - e. SC-14 Brush or Rock Filter
3. Control offsite runoff from entering construction area
 - a. EC-8 Run-On Diversion
 - b. SC-6 Earth Dike
 - c. SC-7 Temporary Drains and Swales
4. Incorporate applicable Site Management BMP
 - a. SM-1 Employee Training
 - b. SM-2 Material Delivery and Storage
 - c. SM-3 Material Use
 - d. SM-4 Protection of Stockpiles
 - e. SM-6 Solid Waste Management
 - f. SM-7 Sanitary/Septic Waste Management
 - g. SM-9 Hazardous Waste Management
 - h. SM-10 Spill Prevention and Control
 - i. SM-11 Vehicle and Equipment Cleaning
 - j. SM-12 Vehicle and Equipment Maintenance
 - k. SM-13 Vehicle and Equipment Refueling
 - l. SM-14 Scheduling
 - m. SM-15 Location of Potential Sources of Sediment
 - n. SM-16 Preservation of Existing Vegetation
 - o. SM-18 Dust Control
5. Contain pollutants within the Construction Staging/Storage Area BMP with applicable Perimeter Sediment Controls and Site Management BMP. Include a Stabilized Construction Entrance/Exit (EC-2) for all areas which exit onto a paved street. Restrict vehicle access to these points.
6. Manage Concrete Waste including installing a Concrete Washout Area (SM-5) and properly disposing of Concrete Curing Water (California Stormwater BMP Handbook NS-12 Concrete Curing).
7. Remove saw cut slurry and hydrodemolition water from the site by vacuuming. Provide storm drain protection and/or perimeter sediment controls during saw cutting and hydrodemolition work.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	2/20/14
DESIGNED BY	CHECKED BY	
QUANTITIES BY		
Checked by		
No.		


STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES


KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No.: 50C-01-18

Date: January 2022

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	8	30

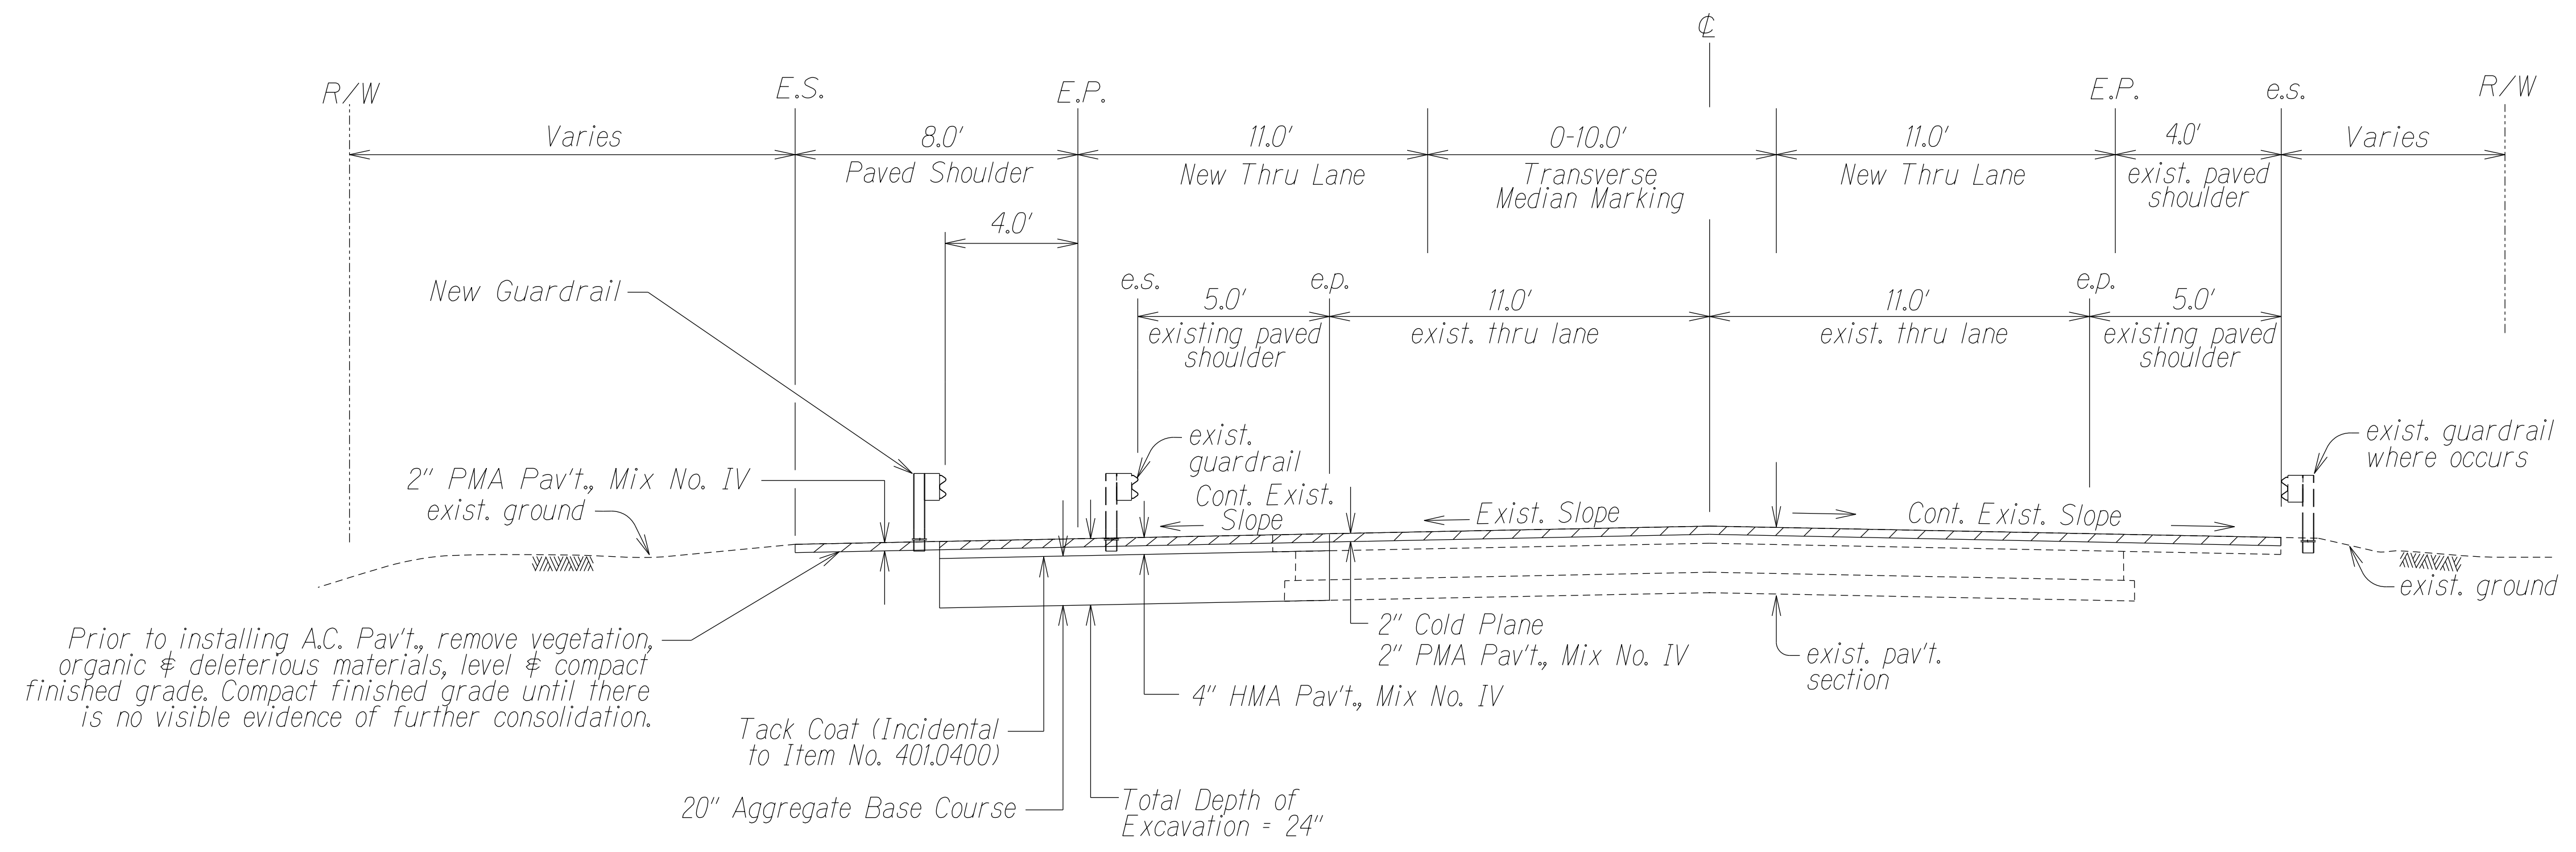

TYPICAL SECTION FROM \pm STA. 33+91.17± TO \pm STA 36+70±
Not to Scale

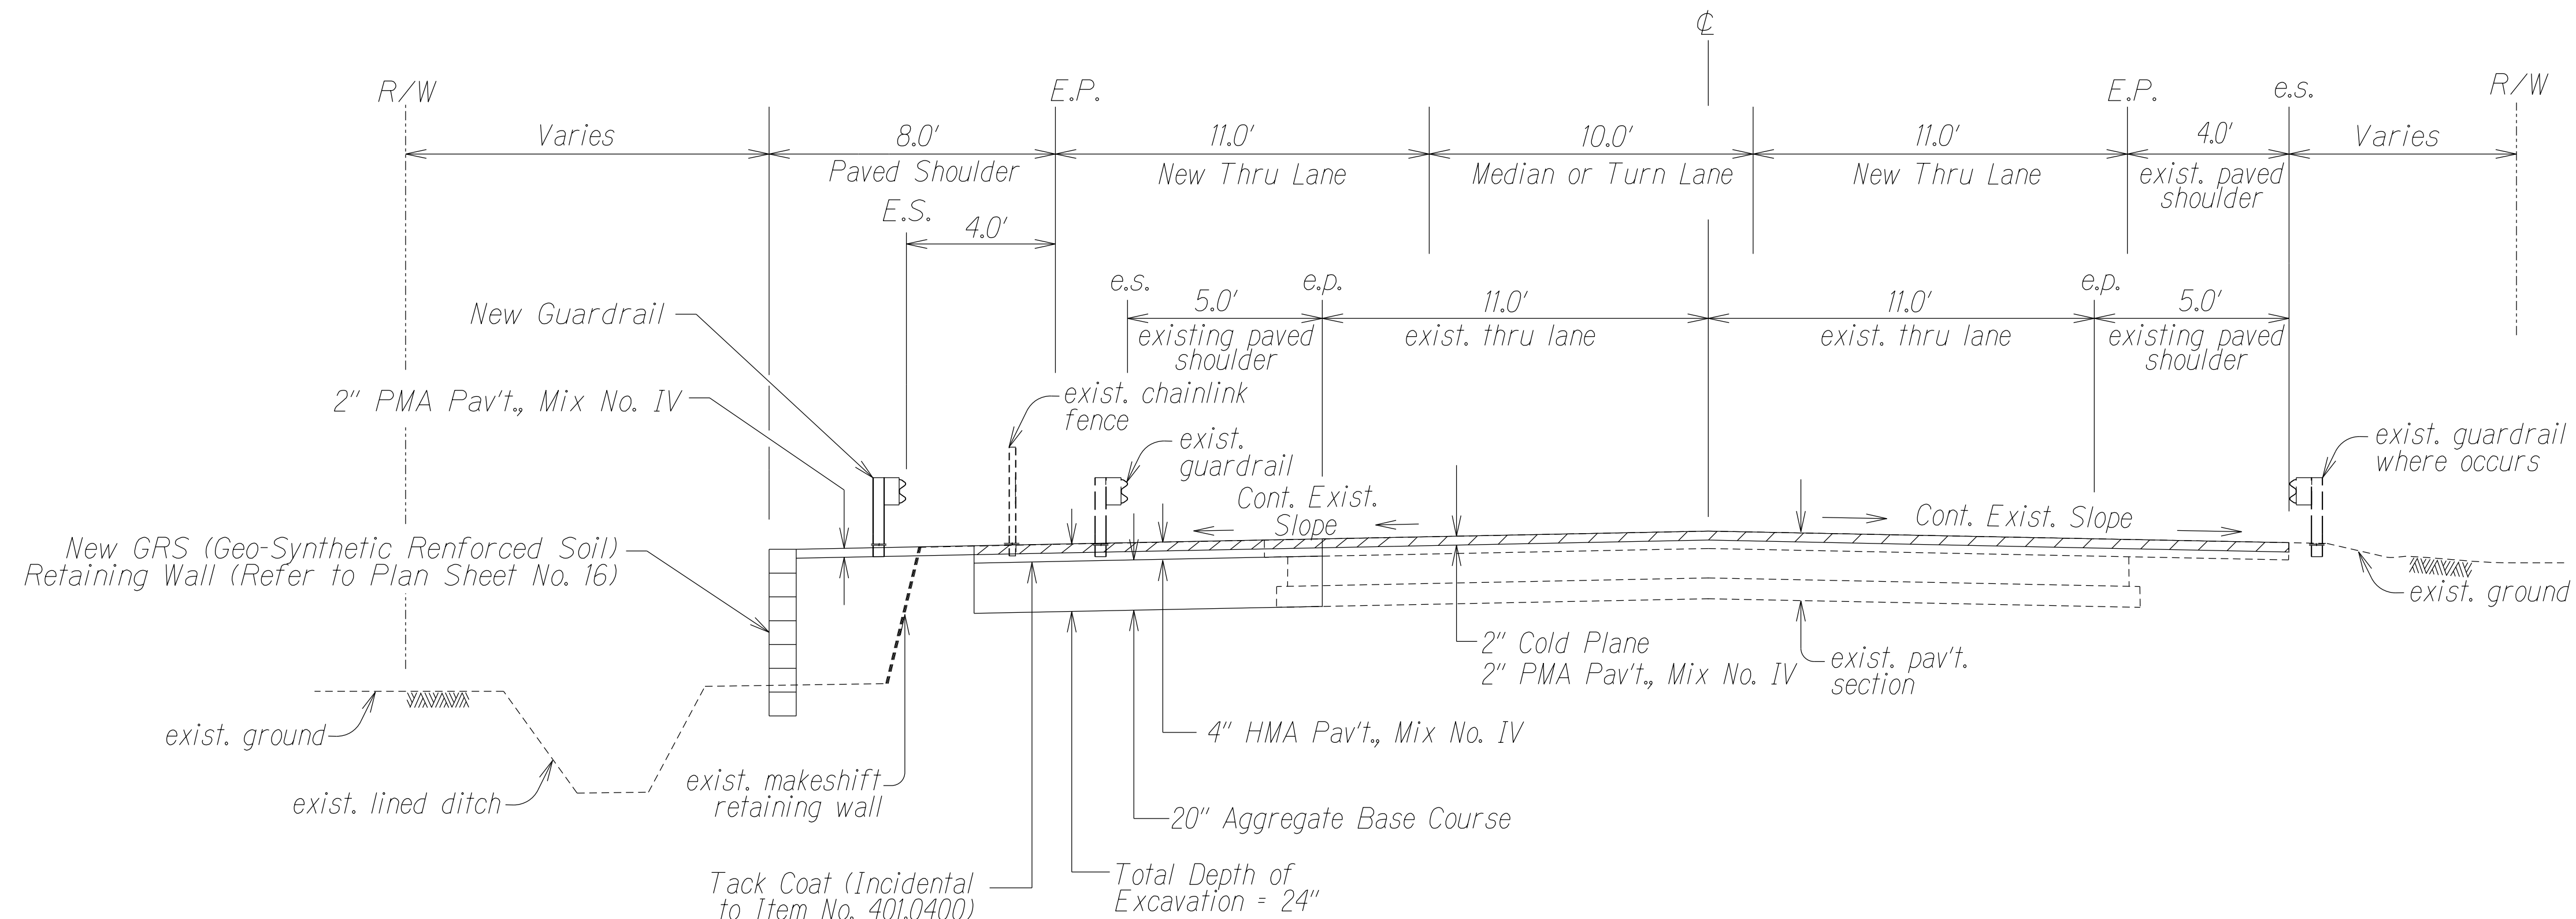

TYPICAL SECTION FROM \pm STA. 36+70± TO \pm STA 38+38±
Not to Scale

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	


STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

TYPICAL SECTIONS
KAUAIILII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18


Not to Scale Date: January 2022

SHEET No. 1 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	9	30

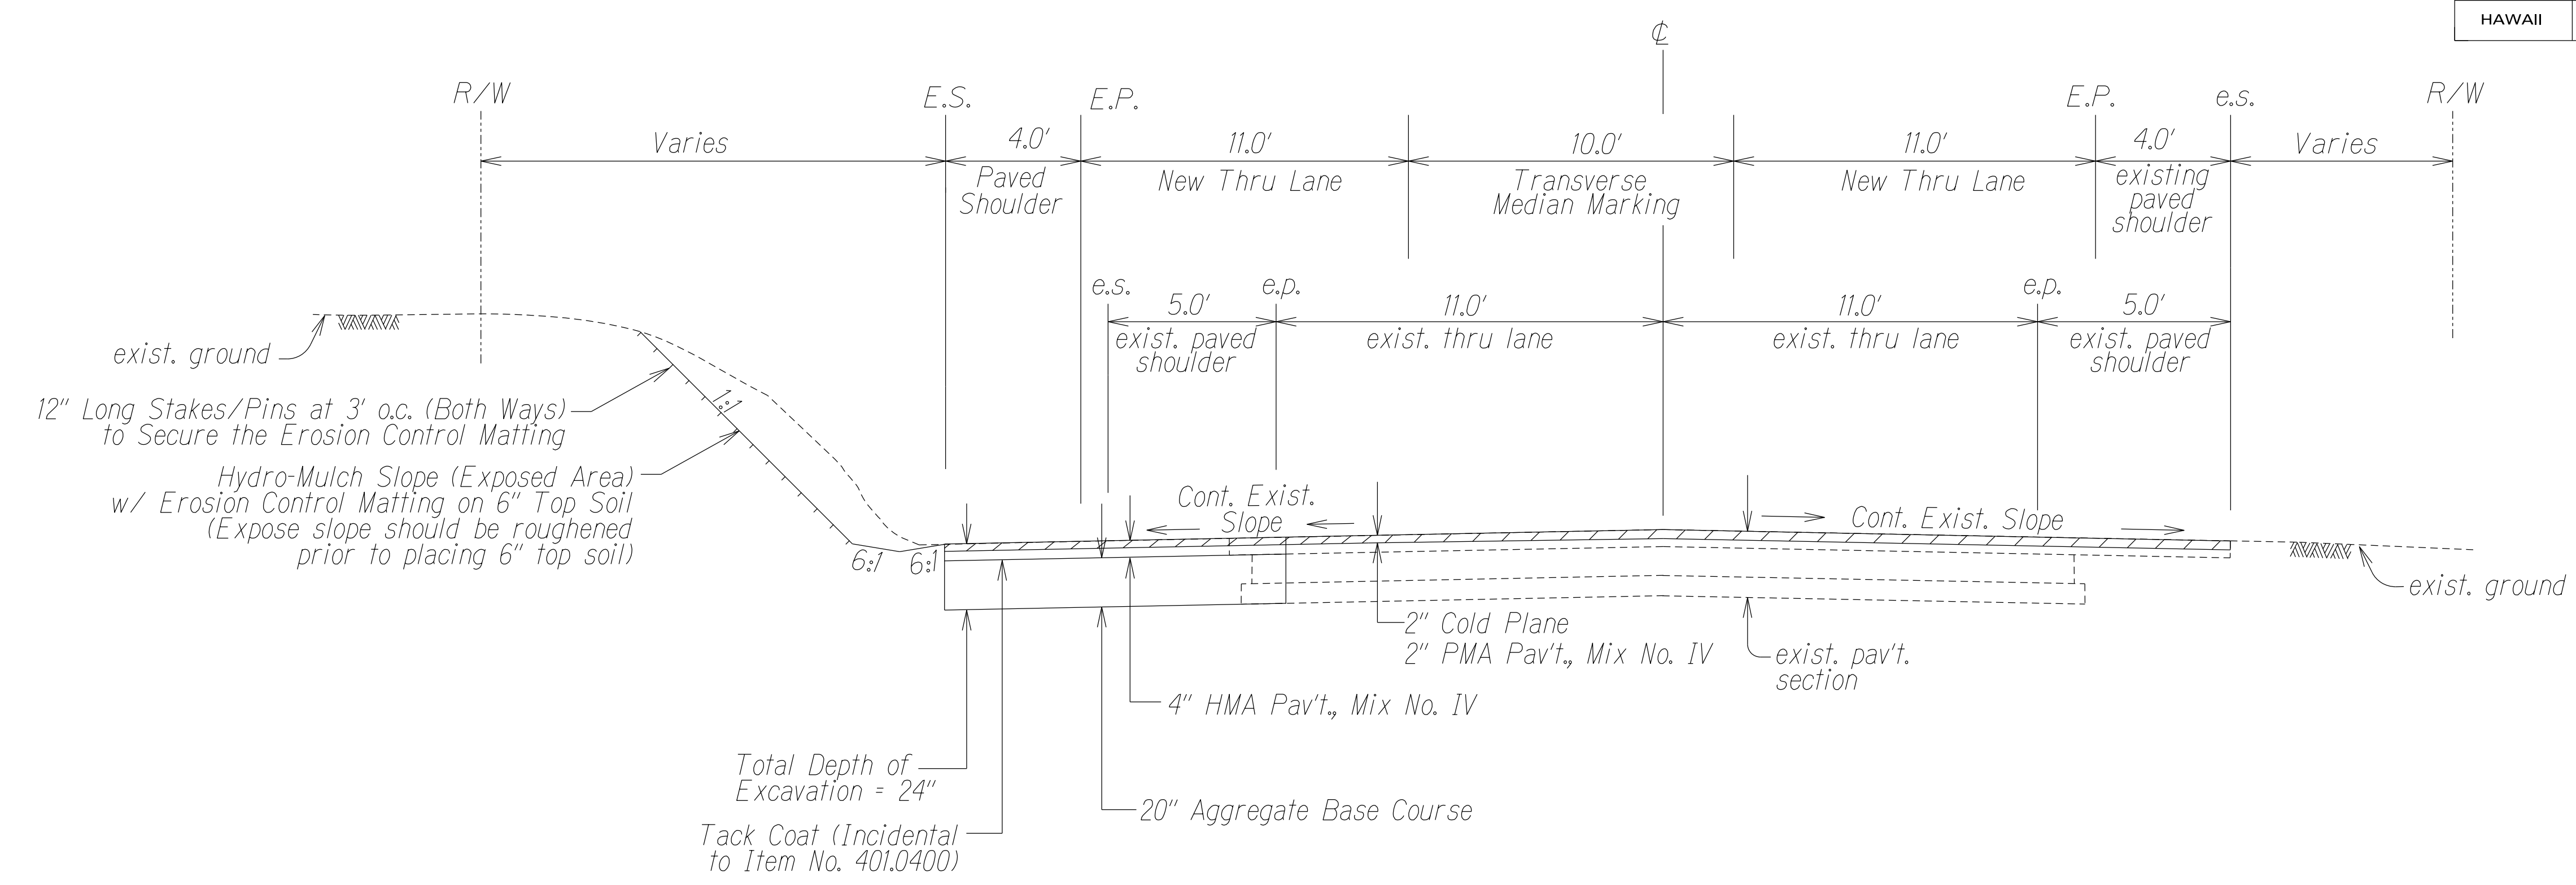

TYPICAL SECTION FROM \pm STA. 38+38 \pm TO \pm STA 40+50 \pm
Not to Scale

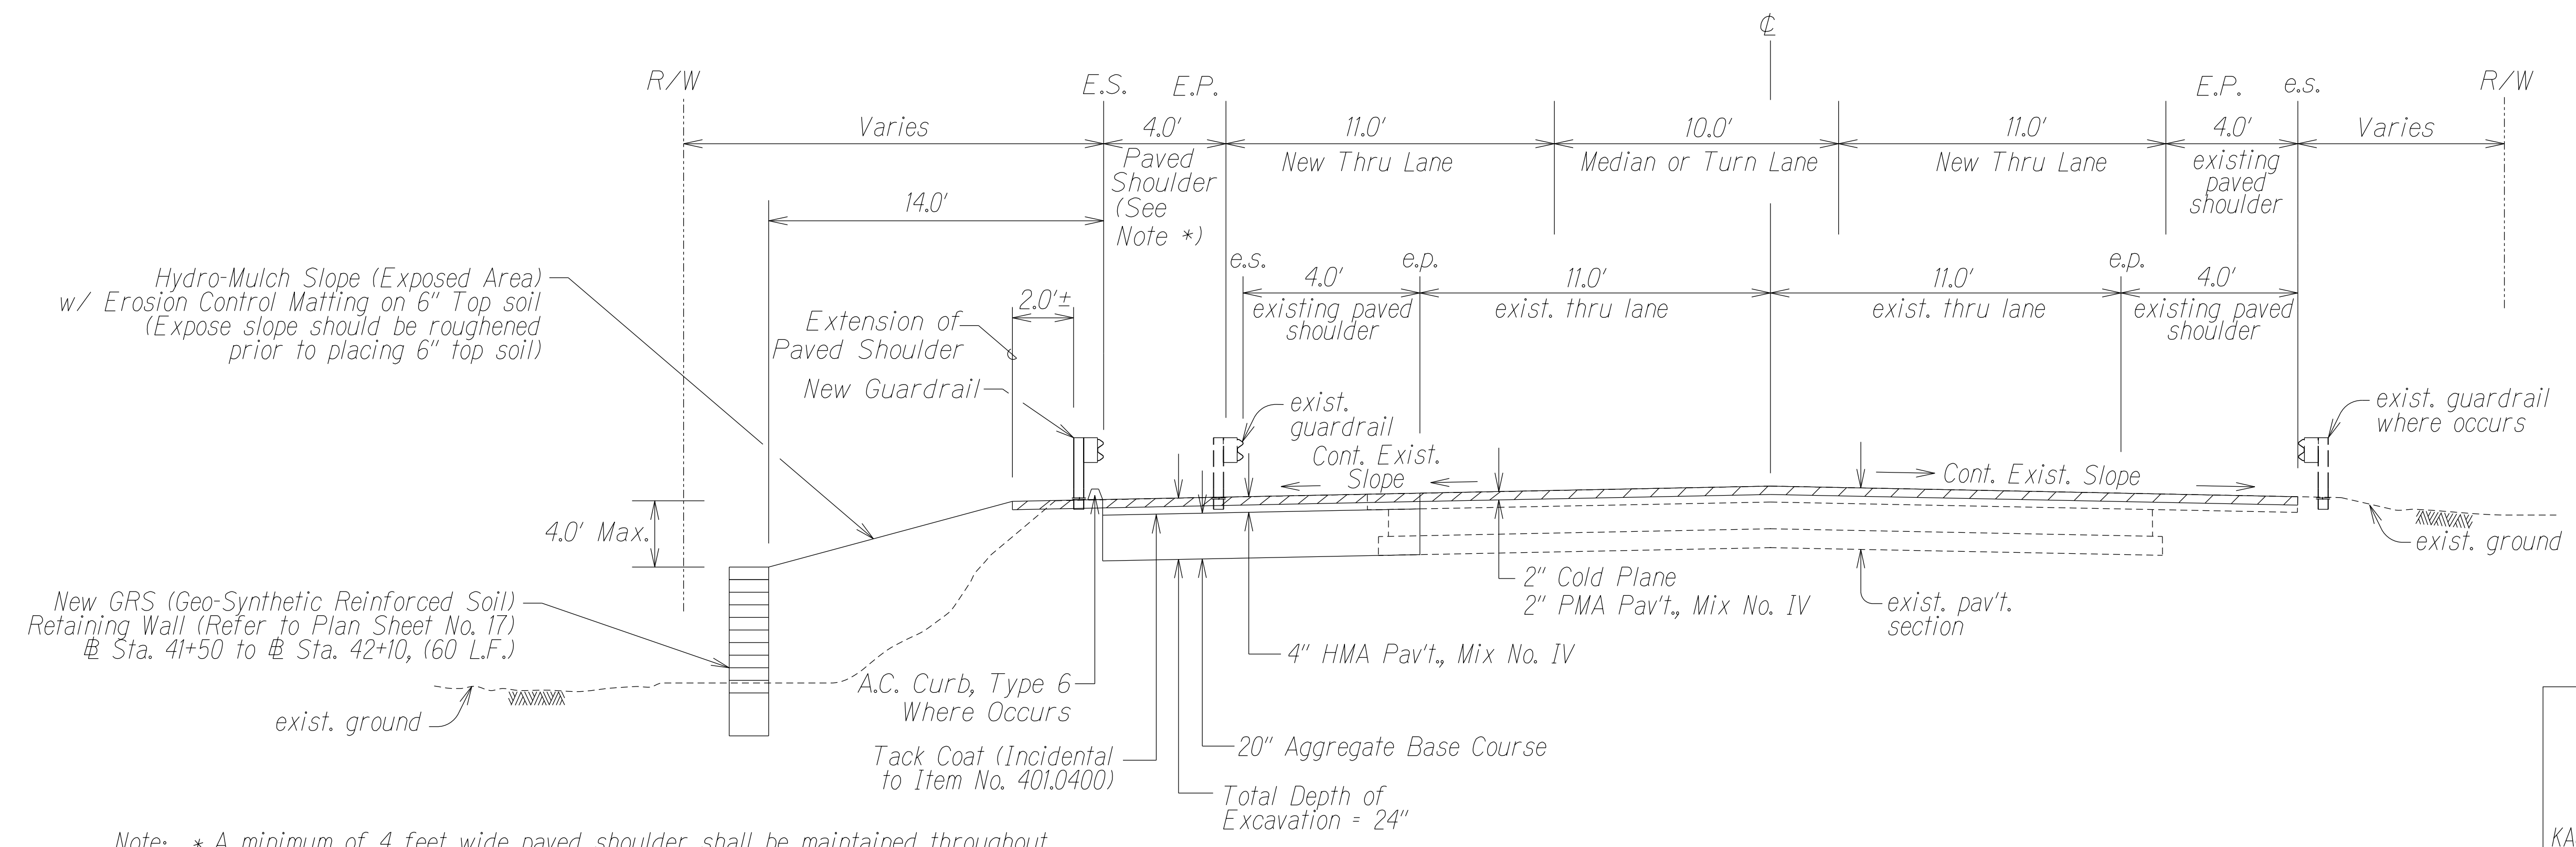

TYPICAL SECTION FROM \pm STA. 40+50 \pm TO \pm STA 43+35 \pm
Not to Scale

Note: * A minimum of 4 feet wide paved shoulder shall be maintained throughout the entire length of the project except at the inbound lane of double barrel box culvert, \pm Sta. 41+24.91. Refer to Plan Sheet. No. 25 - Pavement Marking & Traffic Signing Plan for additional details.

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	


STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

TYPICAL SECTIONS
KAUAIUALLI HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18


Not to Scale Date: January 2022

SHEET No. 2 OF 3 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	10	30

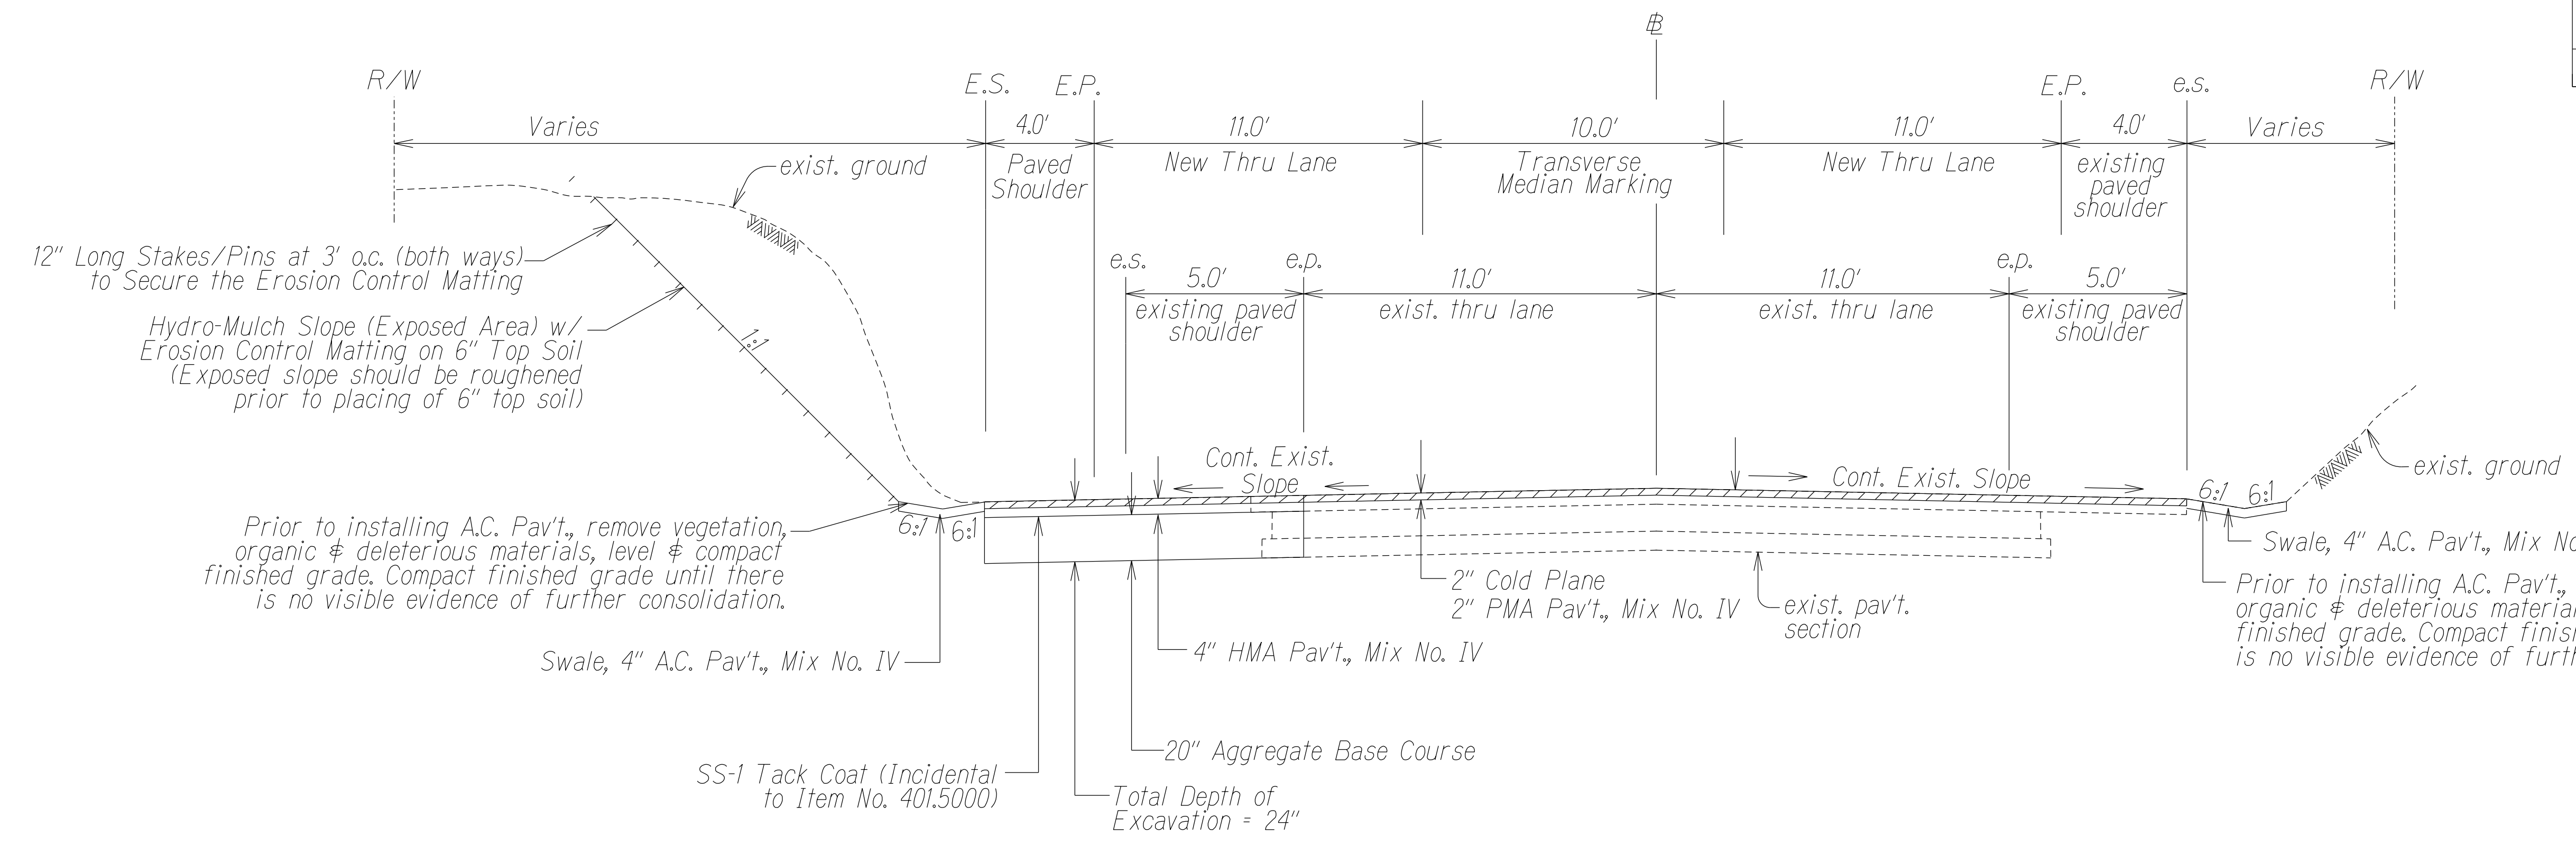

TYPICAL SECTION FROM STA. 43+35± TO STA. 45+31.63±
Not to Scale


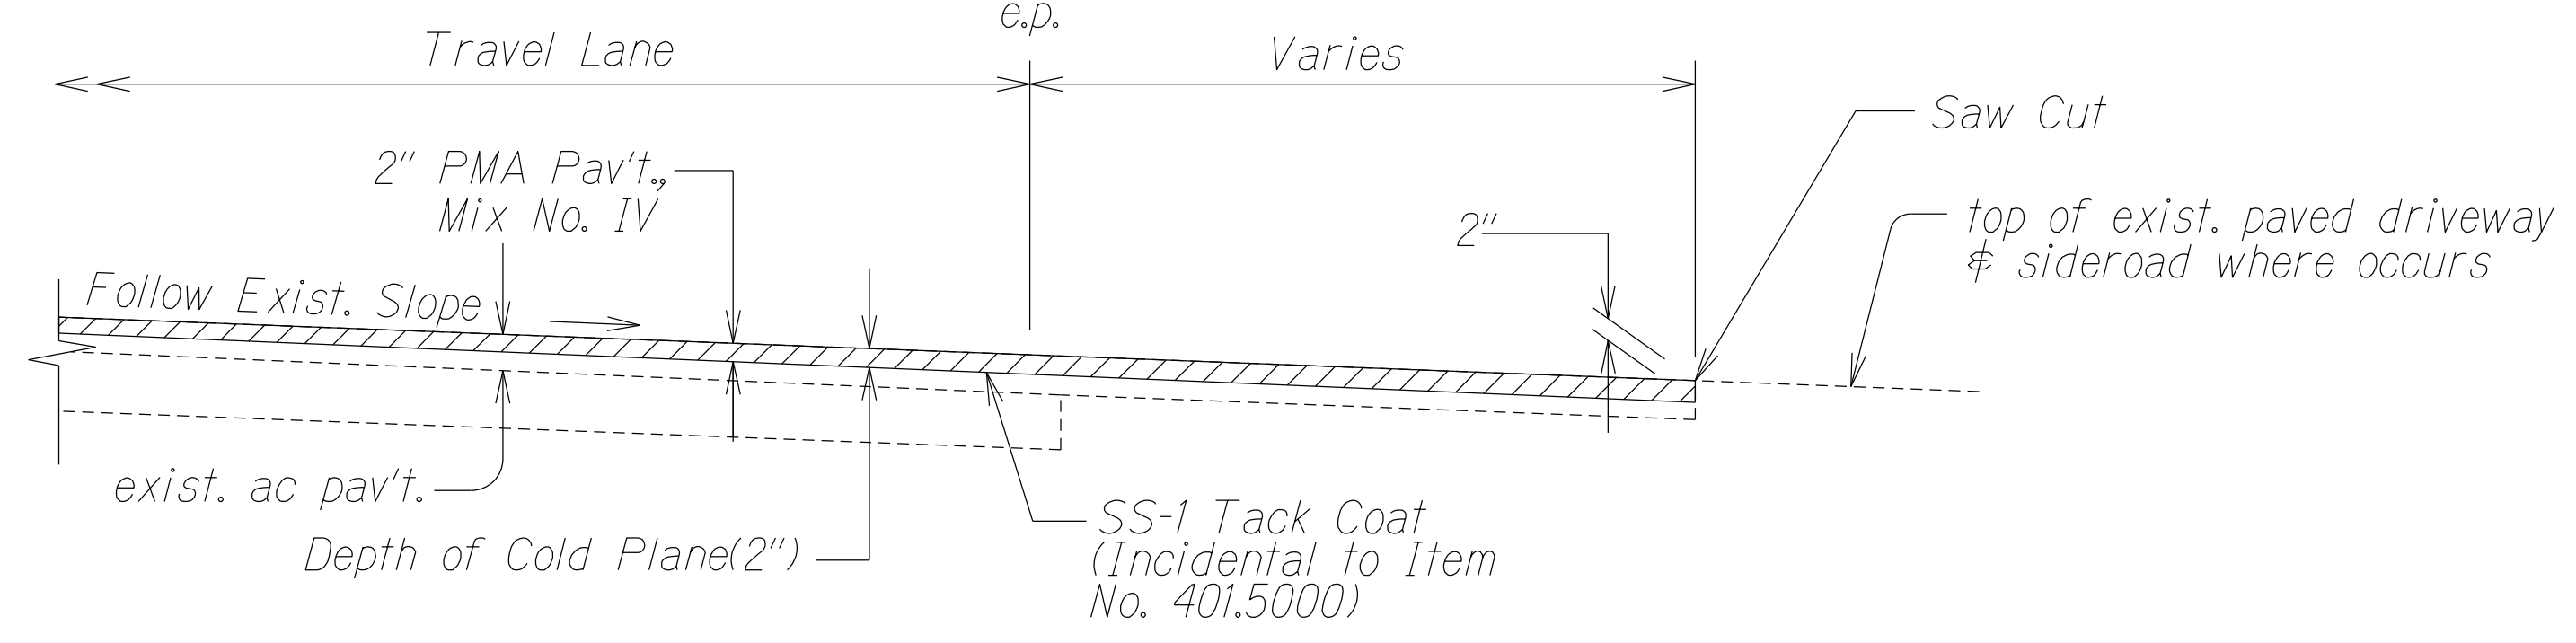


RESURFACING AT PAVED SIDEROADS/DRIVEWAYS
Not to Scale

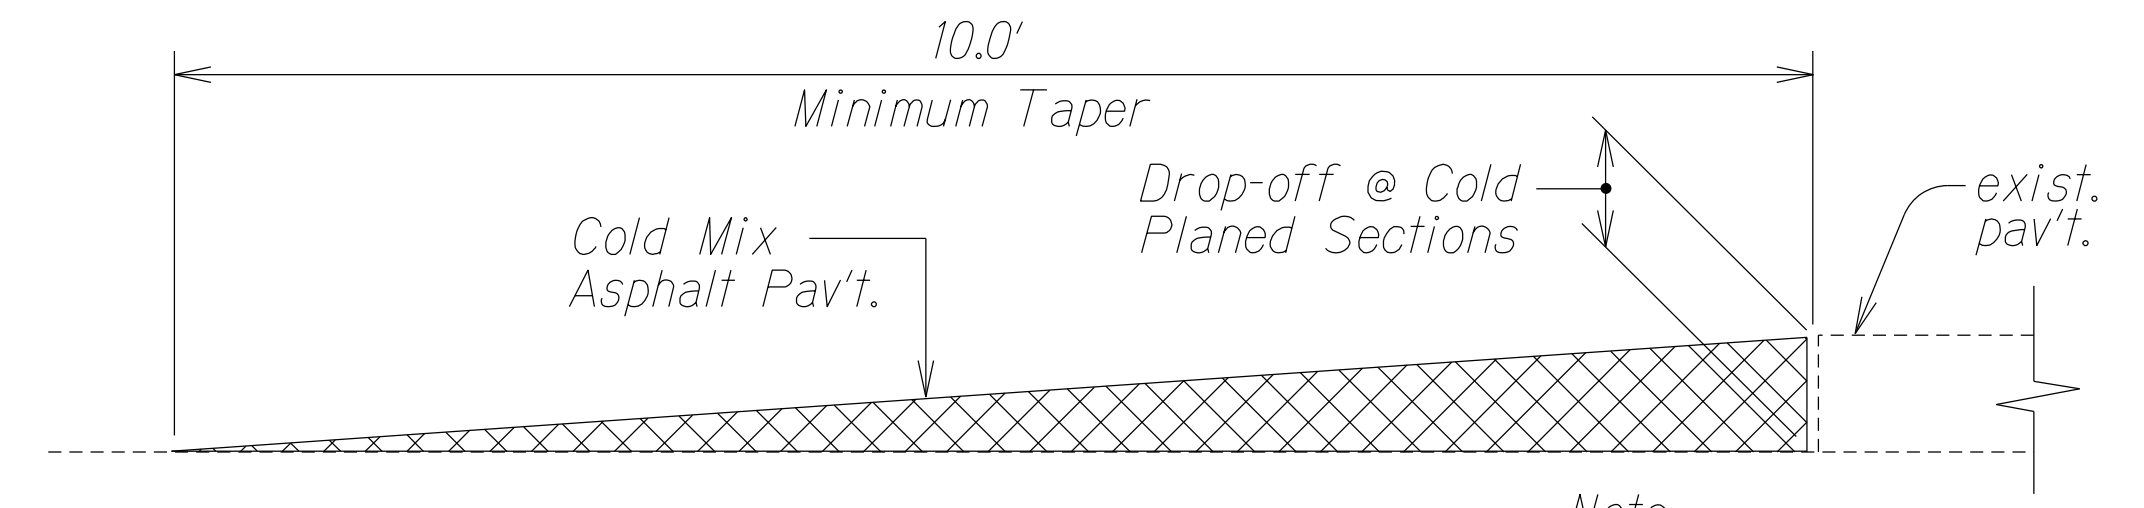

TEMPORARY TRANSITION AT COLD PLANED AREAS
Not to Scale

Note: Contractor shall construct temporary pavement taper to prevent sharp pavement drop-offs at all cold planed sections. Prior to final Hot Mix Asphalt Pavement, Mix No. V placement, temporary pavement taper shall be removed.

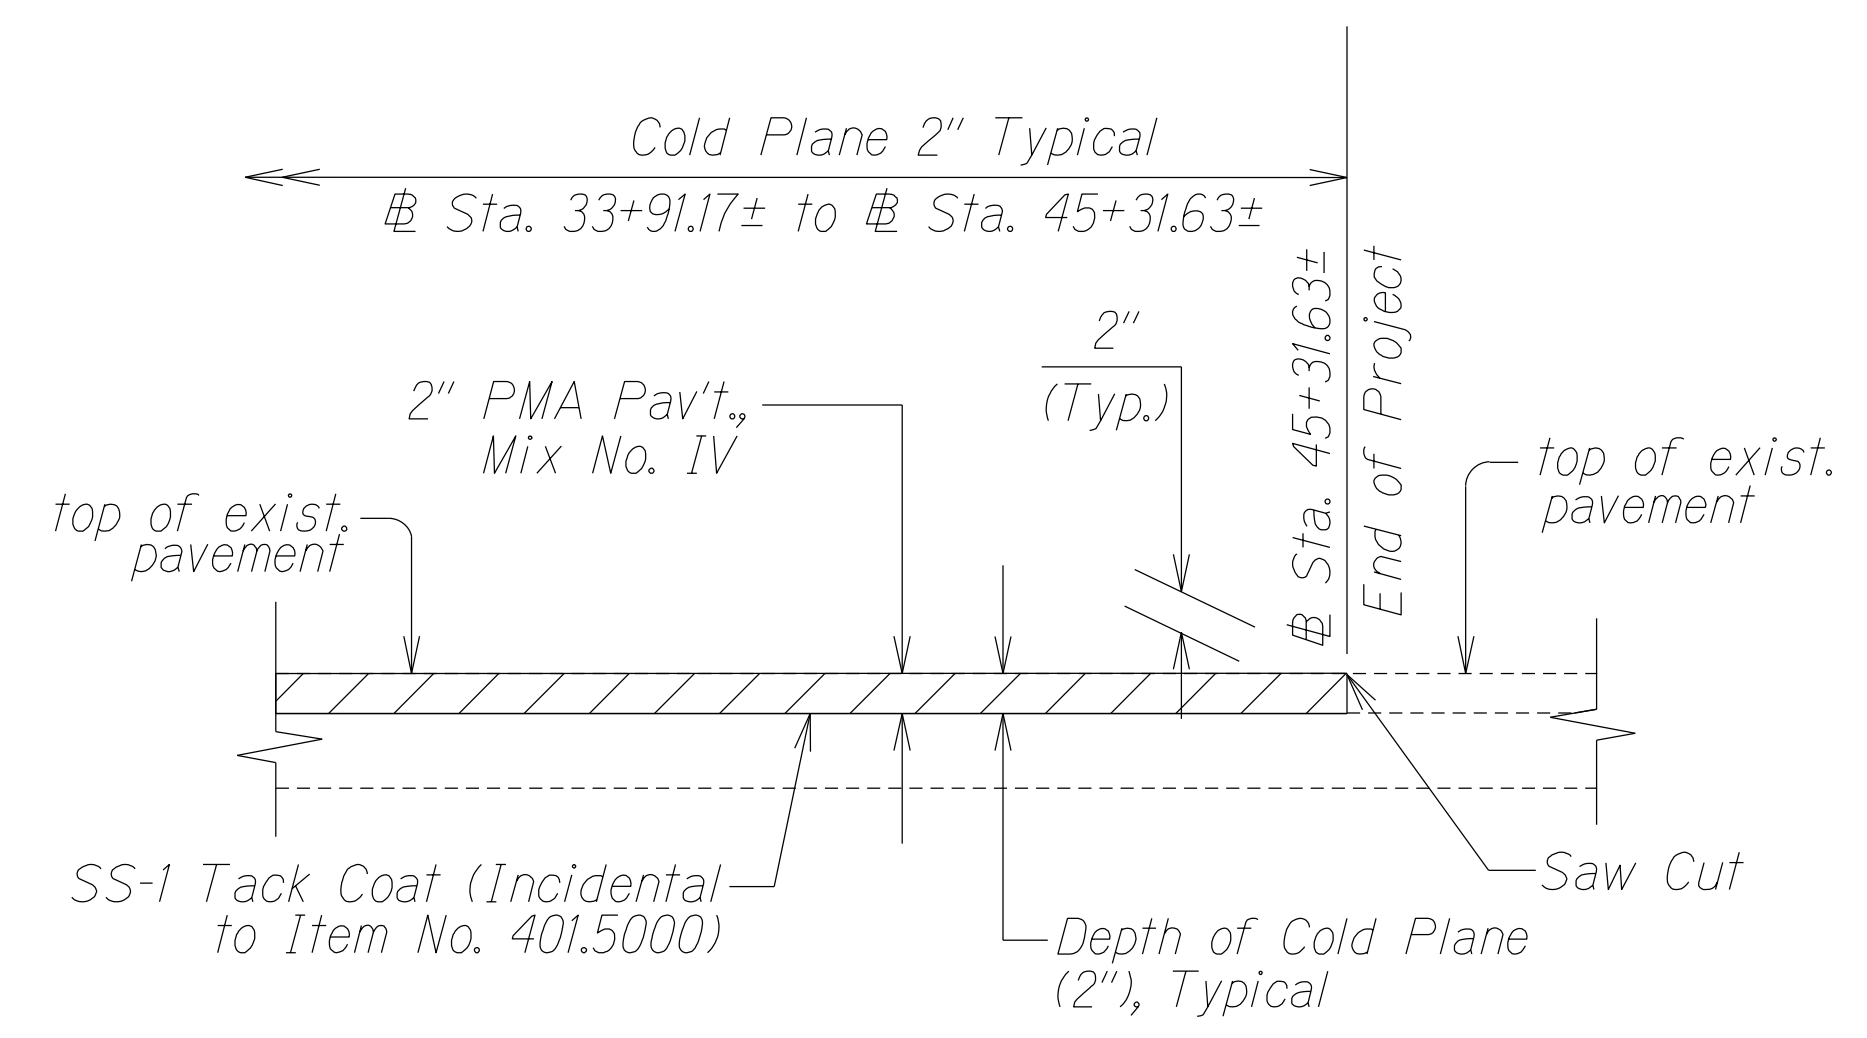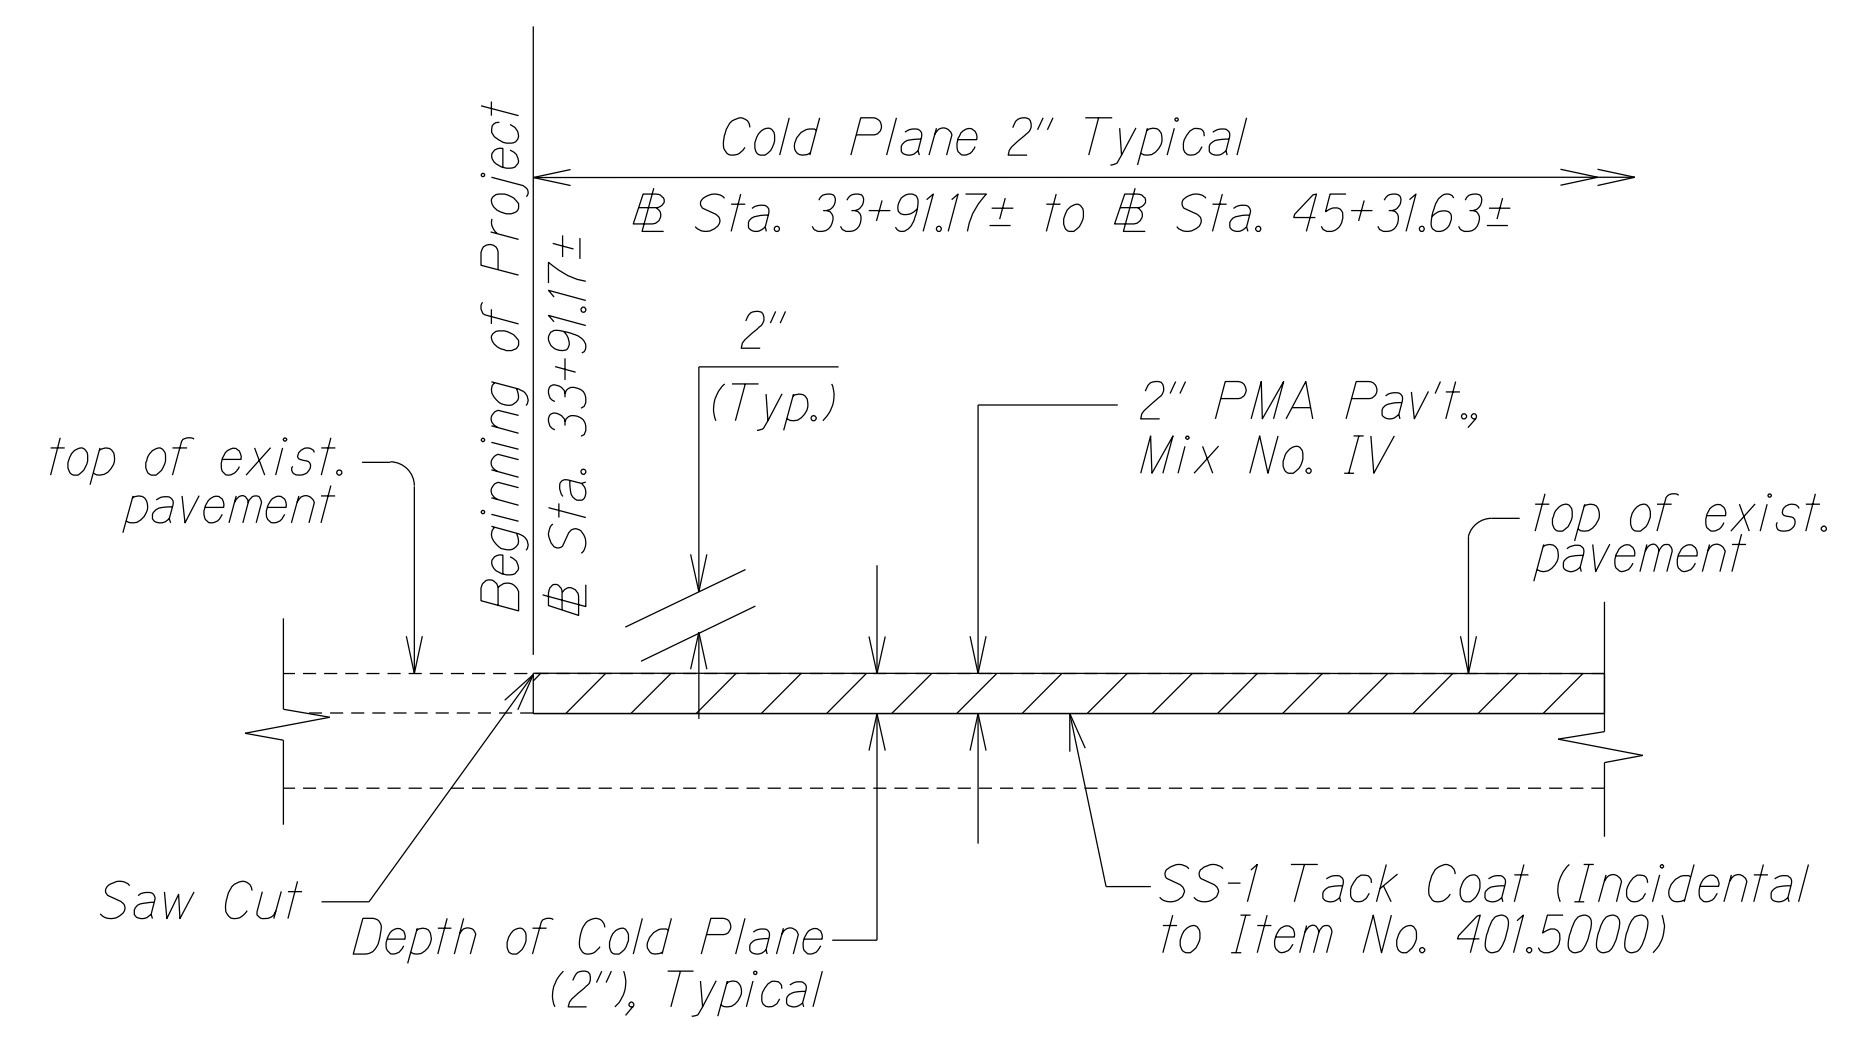

COLD PLANED TRANSITION TO EXISTING A.C. PAVEMENT AT THE BEGINNING AND END OF PROJECT
Not to Scale

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
NOTE BOOK	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

TYPICAL SECTIONS

KAUAIUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18

Not to Scale Date: January 2022


SHEET No. 3 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	11	30



GENERAL NOTES

1. All hardware, posts and fasteners shall be hot-dip zinc coated galvanized after fabrication. No punching, drilling or cutting will be permitted after galvanizing.
2. Where conditions require, special post lengths in increments of 6 inches may be specified by the Engineer.
3. All fasteners, posts, and rail elements (i.e. FBB03, PWE01, RWM04b, etc.) shall conform to the latest edition and amendments of "A Guide to Standardized Highway Barrier Rail Hardware", a report prepared and approved by the AASHTO-AGC-ARTBA Joint Cooperative Committee, Subcommittee On New Highway Materials, Task Force 13 Report. Dimensions of fasteners, posts and rail elements have been converted from metric units into their present form.
4. The Blockout or Offset Block shall be approved by the State.
5. All new guardrail systems (system consists of total length of guardrail including both end treatments) shall include the Additional Paved Area.
6. After the guardrail posts are installed in the paved area, the Contractor shall fill/seal around each guardrail post and all cracks in the paved area caused during the guardrail post installation. If required by the inspector/engineer, the Contractor shall tamper the paved area around the guardrail post prior to filling/sealing. All costs associated with this work shall not be paid for separately, but shall be considered incidental to the various guardrail items.
7. When standards for the fill slope area cannot be met, a site specific, engineer approved design may be used.
8. Minimum working width (clear distance) between back of MGS post to any fixed object is 4'-1" (49").
9. New A.C. pavement at guardrails shall extend 6 feet longitudinally beyond terminal ends.
10. Reflector Markers (RM-5) mounted on guardrails shall be spaced every 25 feet. RM-5's shall not be installed on Terminal Sections. Furnishing and installing of each RM-5 shall be considered incidental to the guardrail system.
11. Compact finished grade until there is no visible evidence of further consolidation. This work is subsidiary to guardrail system.


GUARDRAIL TYPE	DIMENSION	
	H	A
MGS w/ Standard 8" Offset Block	2'-1"	1'-6"
MGS w/ No Blockout	2'-7/8"	9/4"

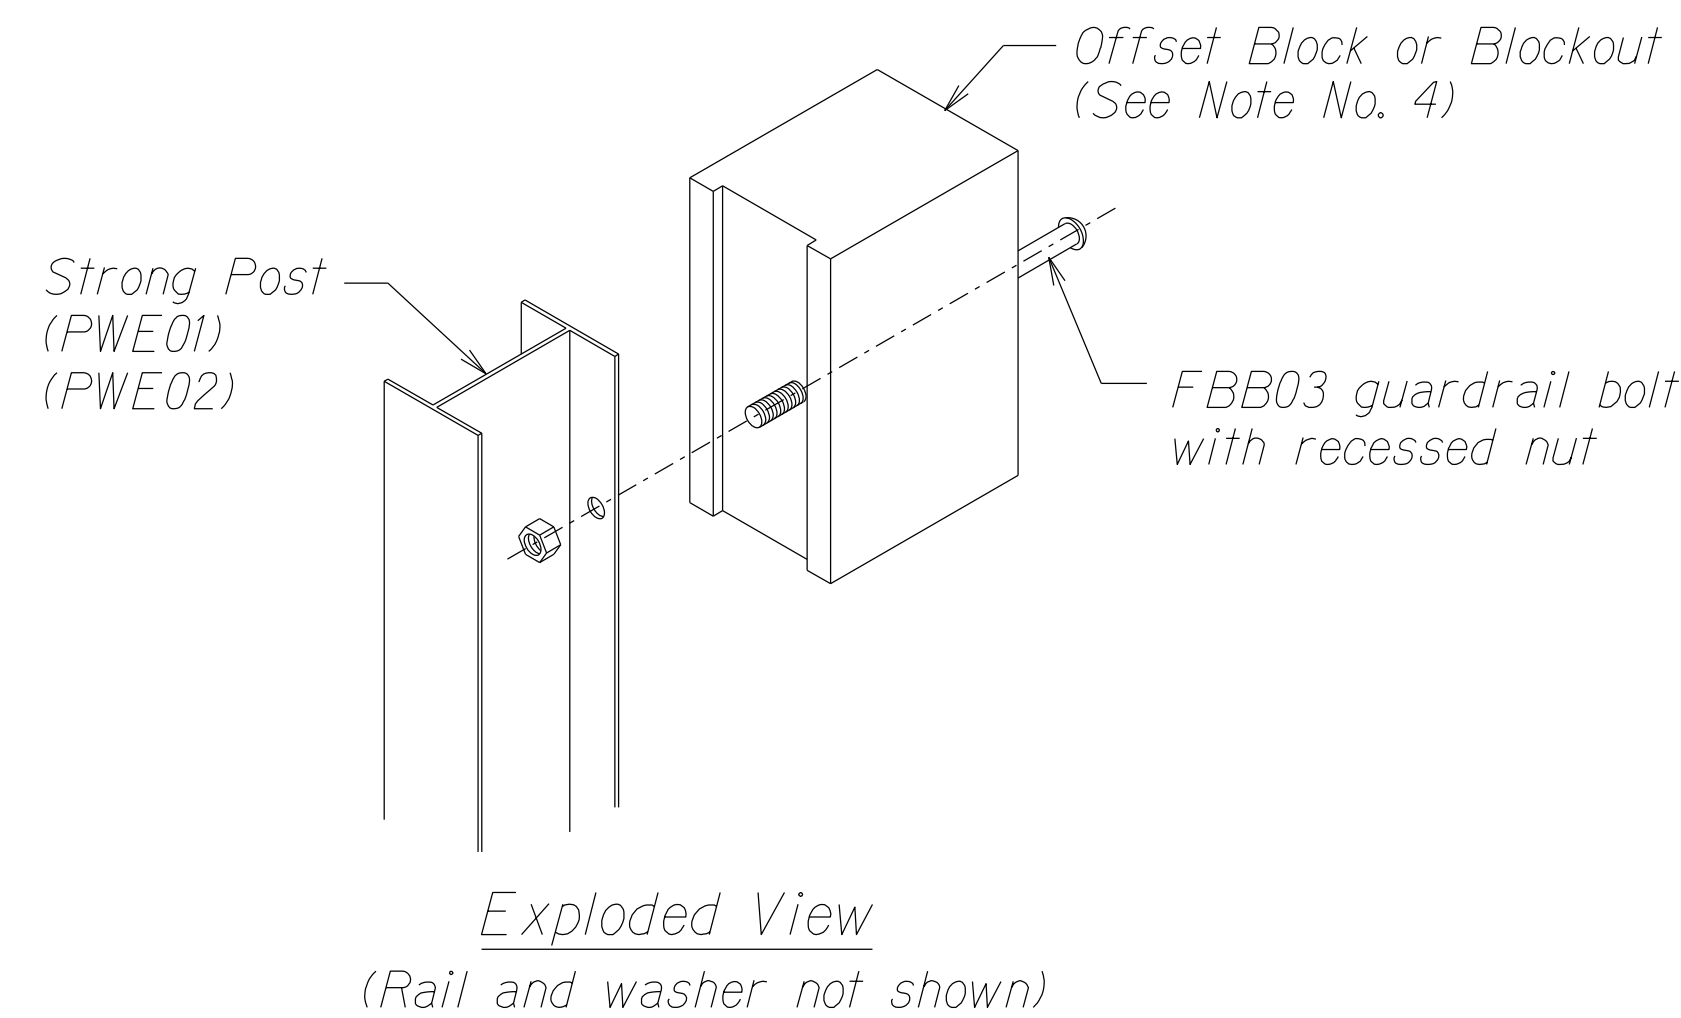

STEEL POST AND BLOCK DETAIL

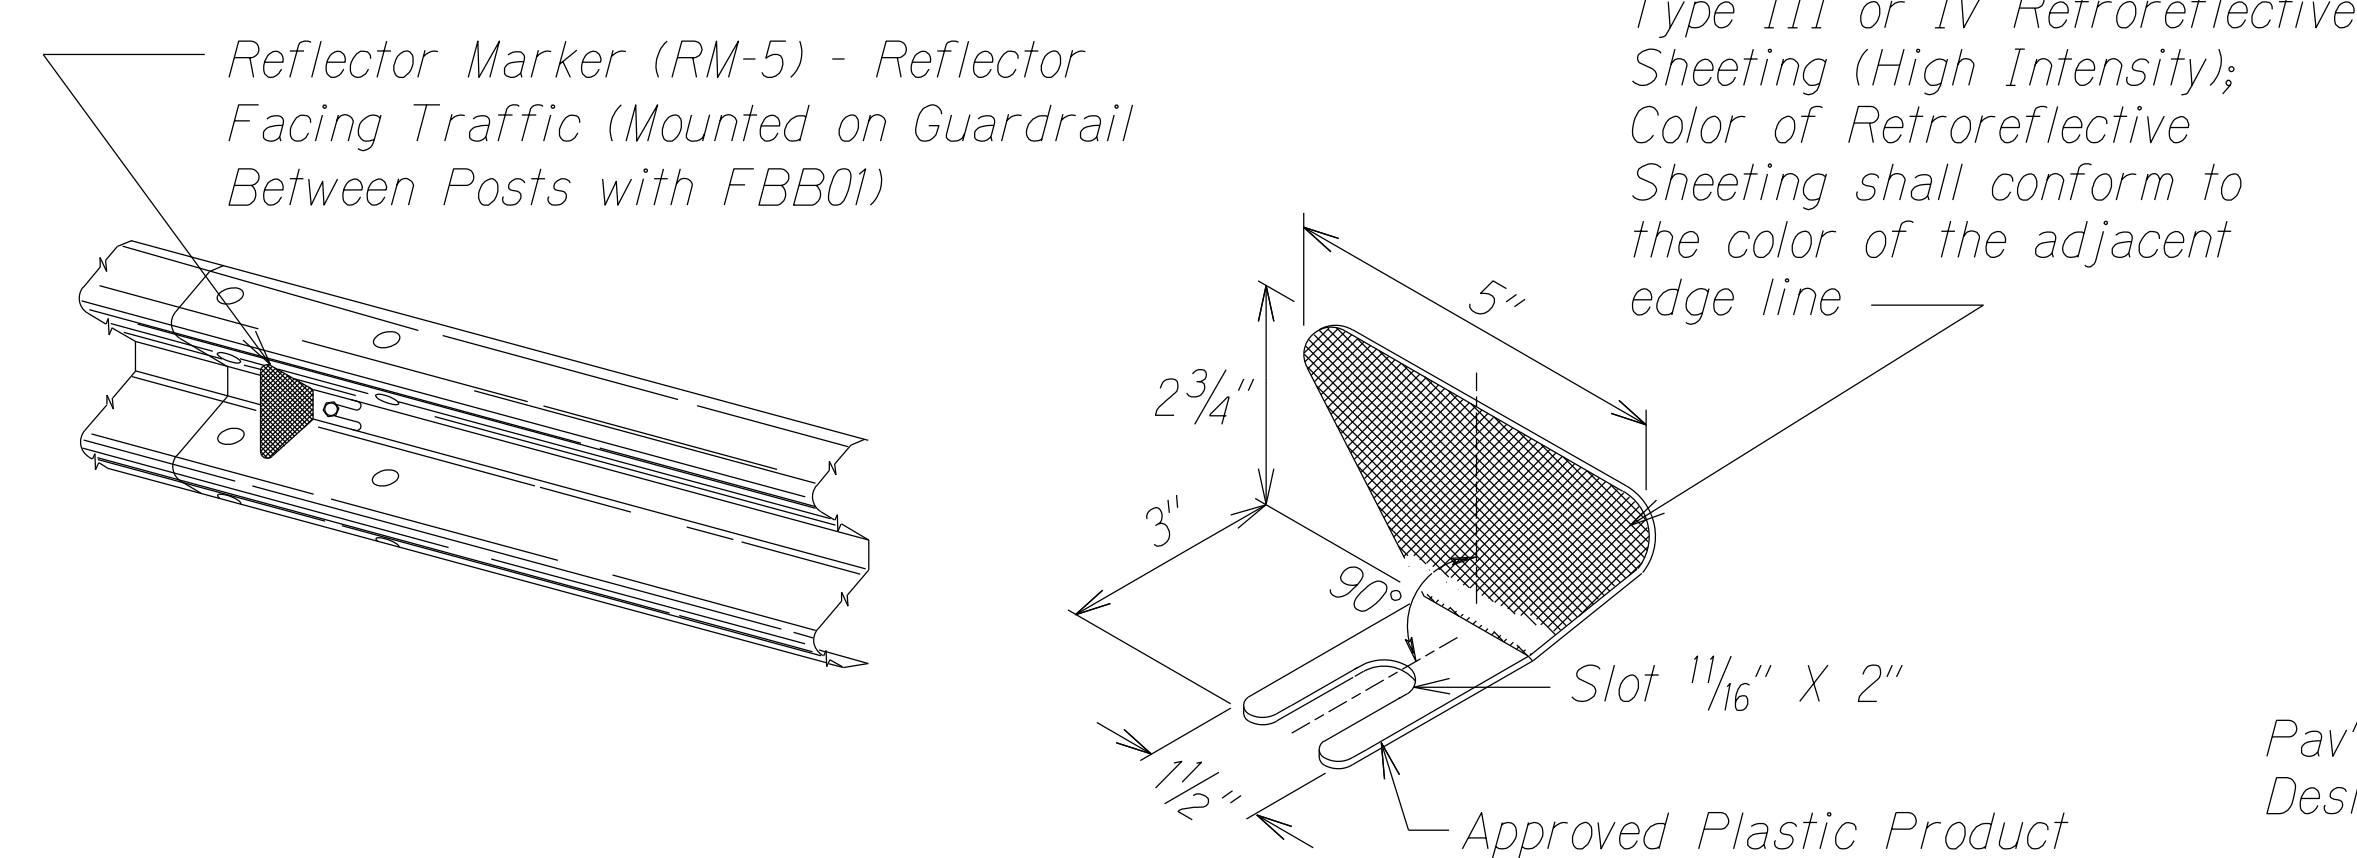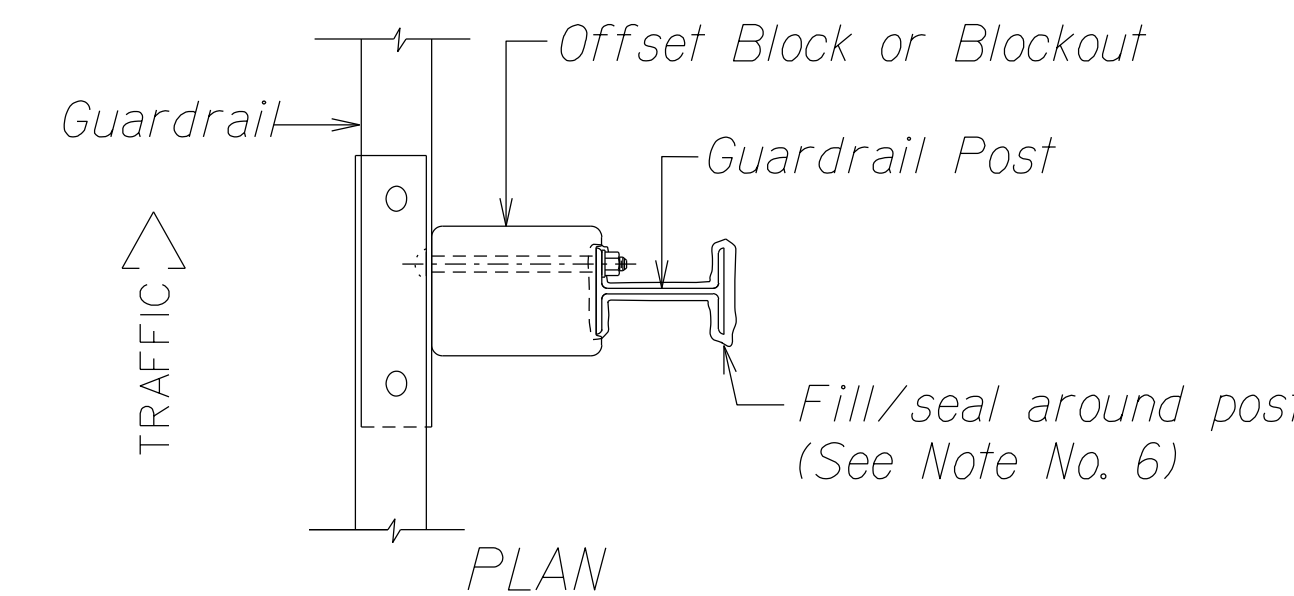

REFLECTOR MARKER (RM-5) DETAIL AND TYPICAL INSTALLATION

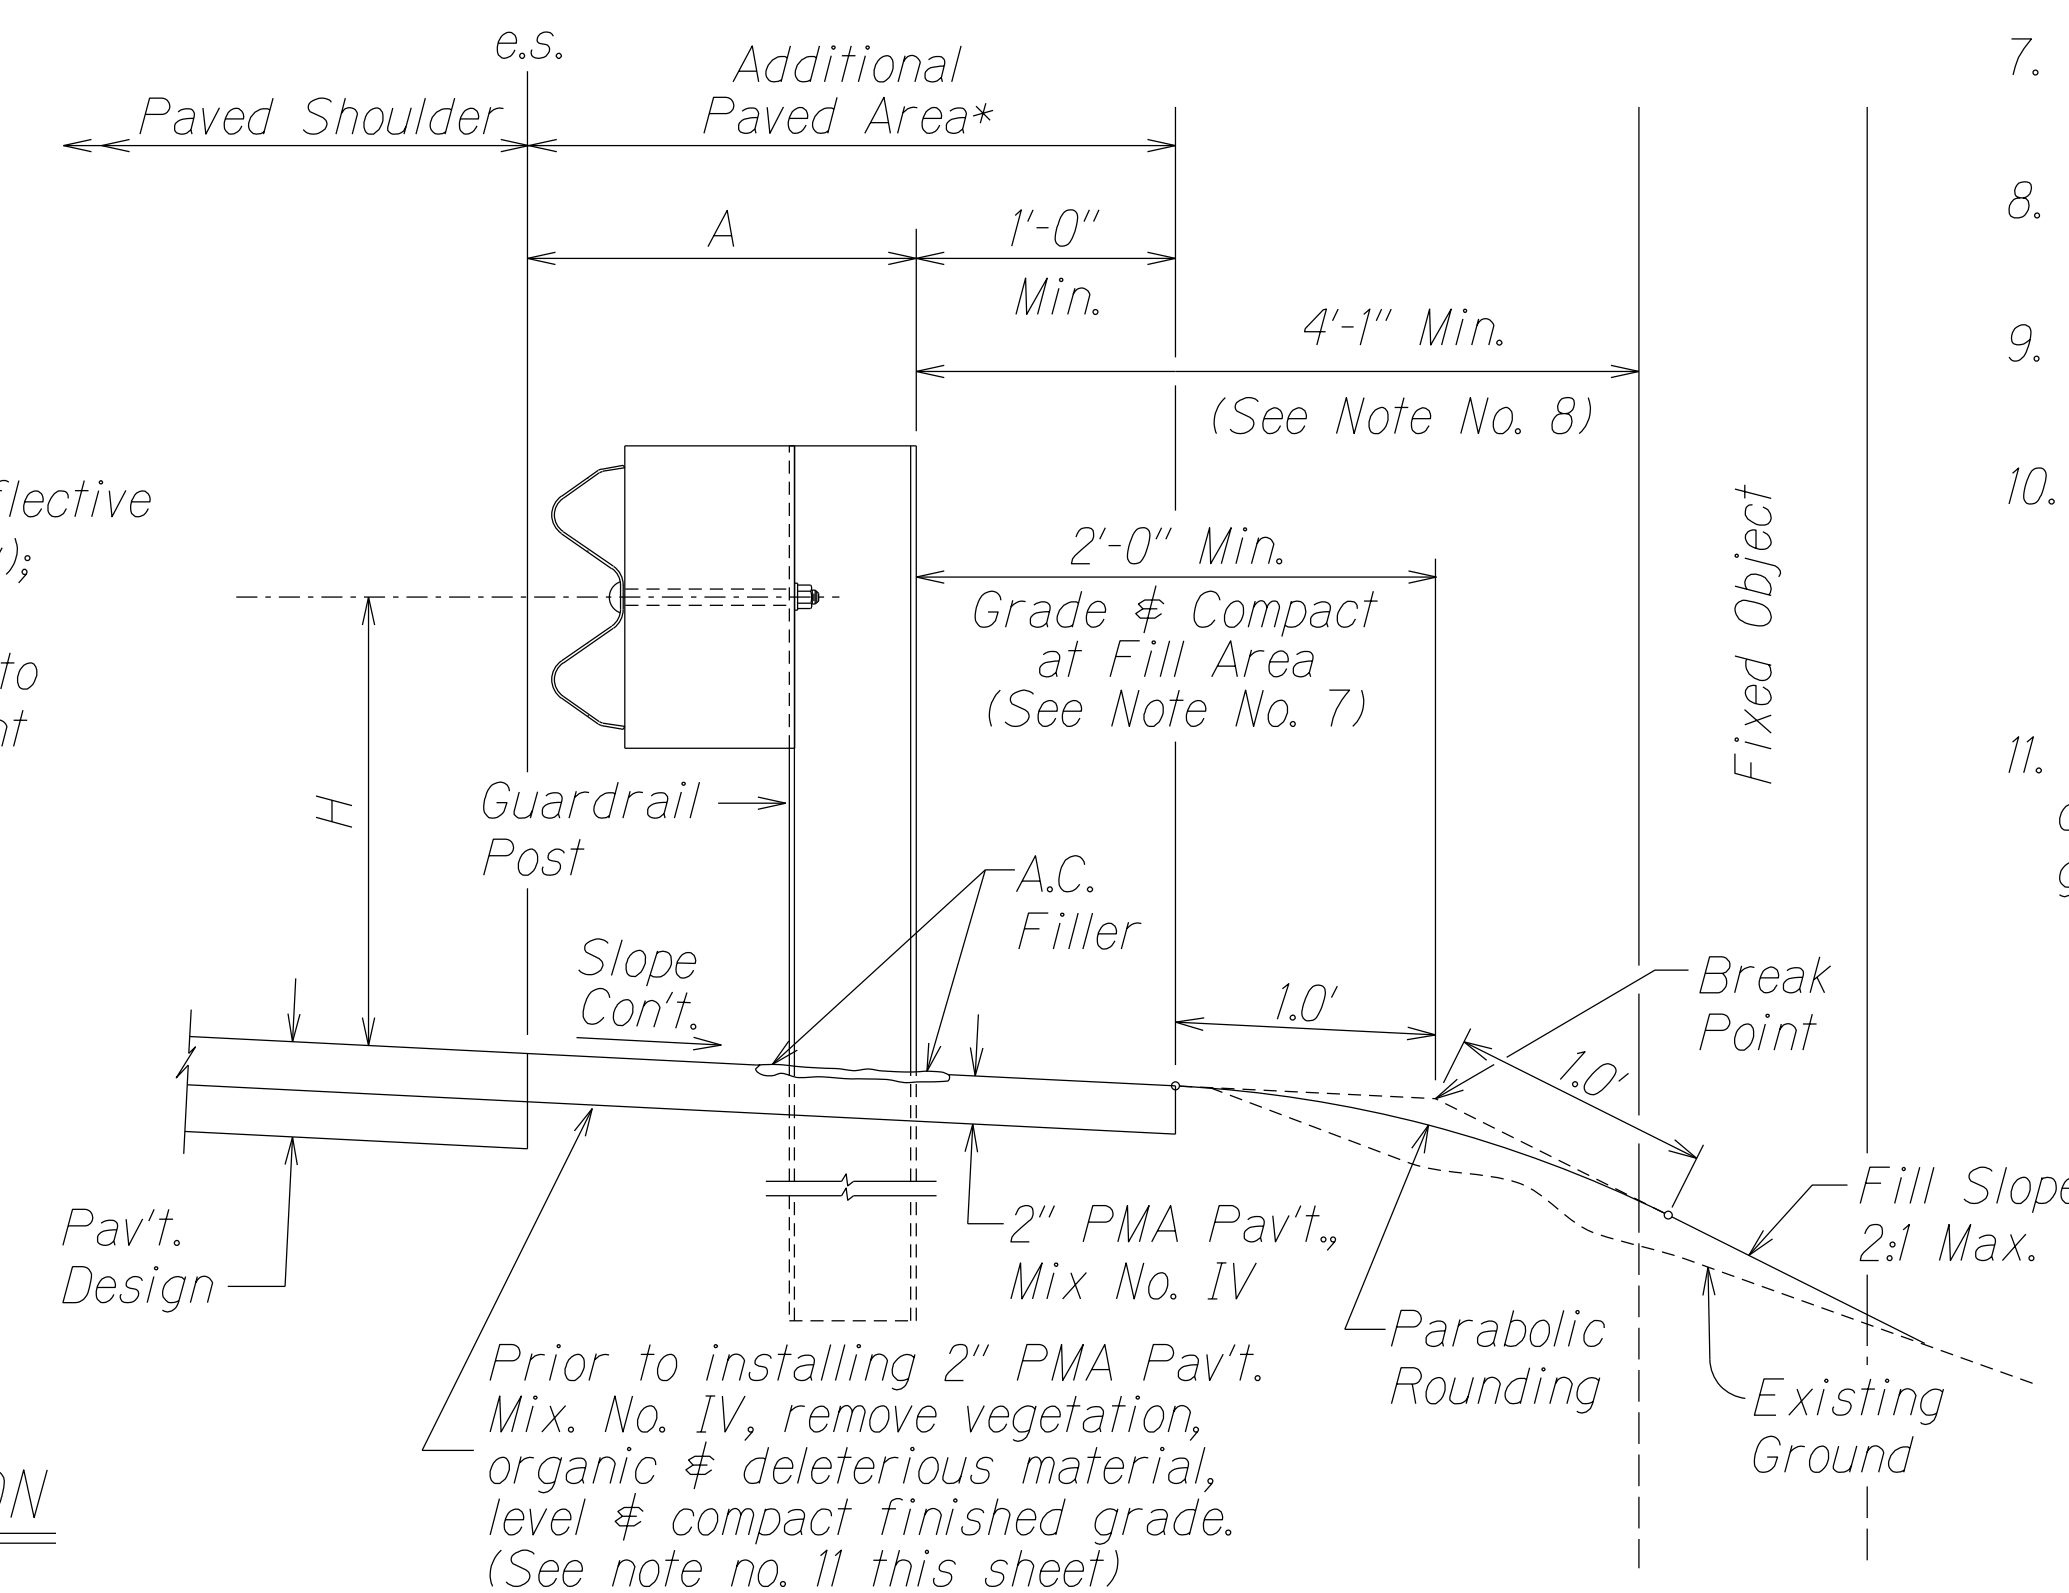

ELEVATION

TYPICAL GUARDRAIL INSTALLATION

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
NOTE BOOK	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION



GUARDRAIL DETAILS & NOTES

KAUAIUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: Not to scale Date: January 2022


SHEET No. 1 OF 5 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	12	30

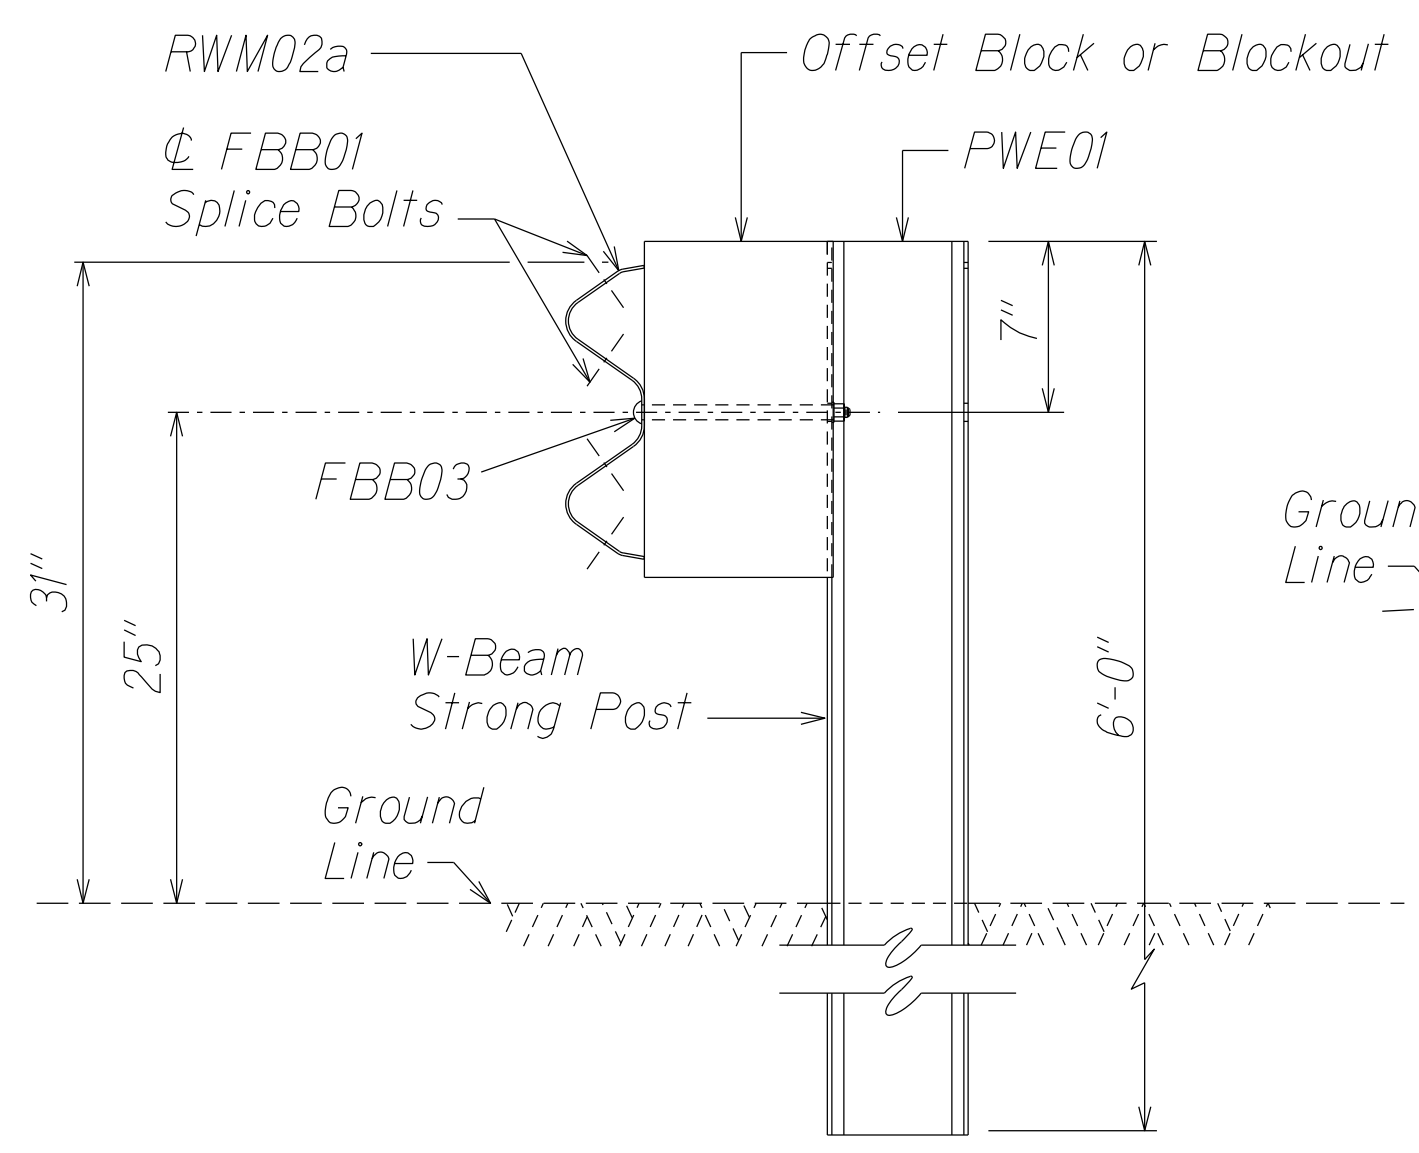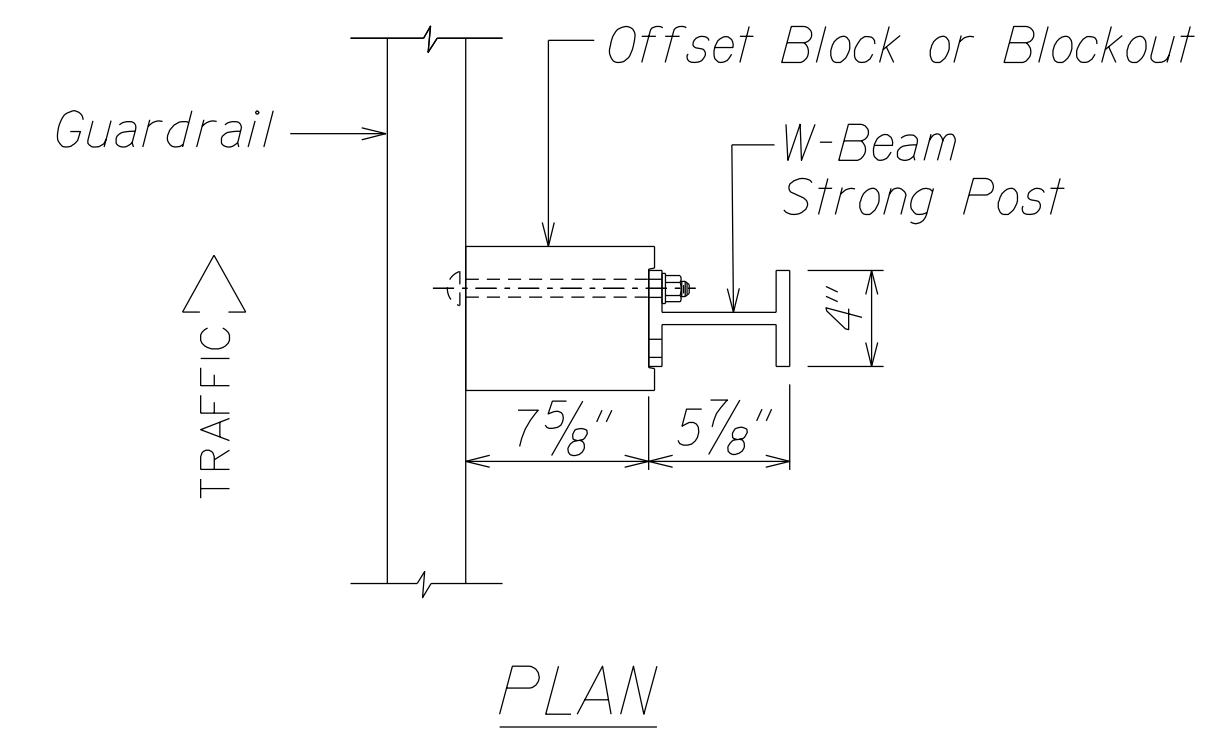


SECTION A-A

NOTE:
All Holes are
3/4" Dia.

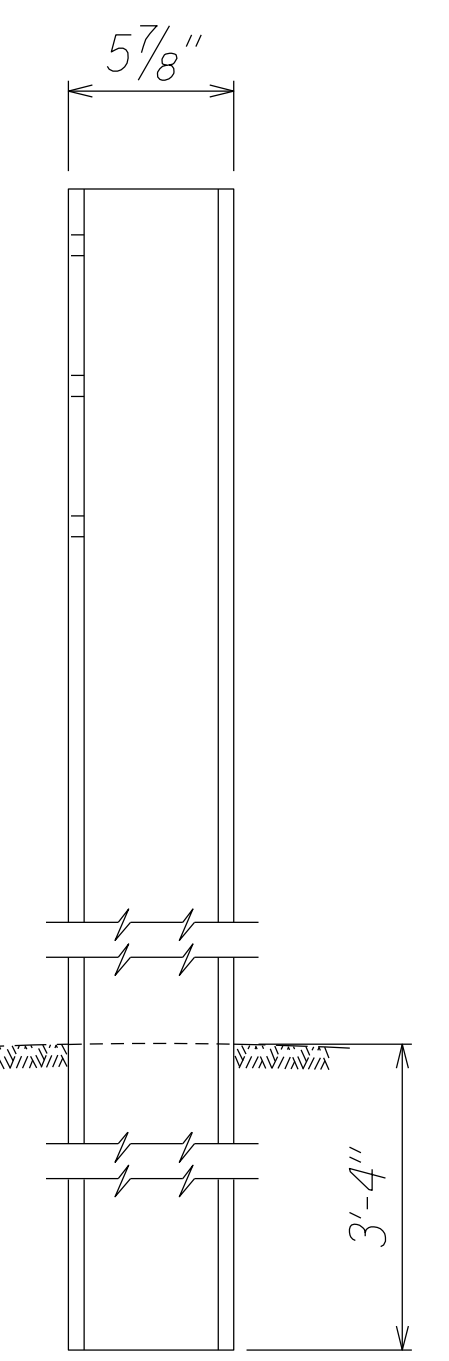


SIDE

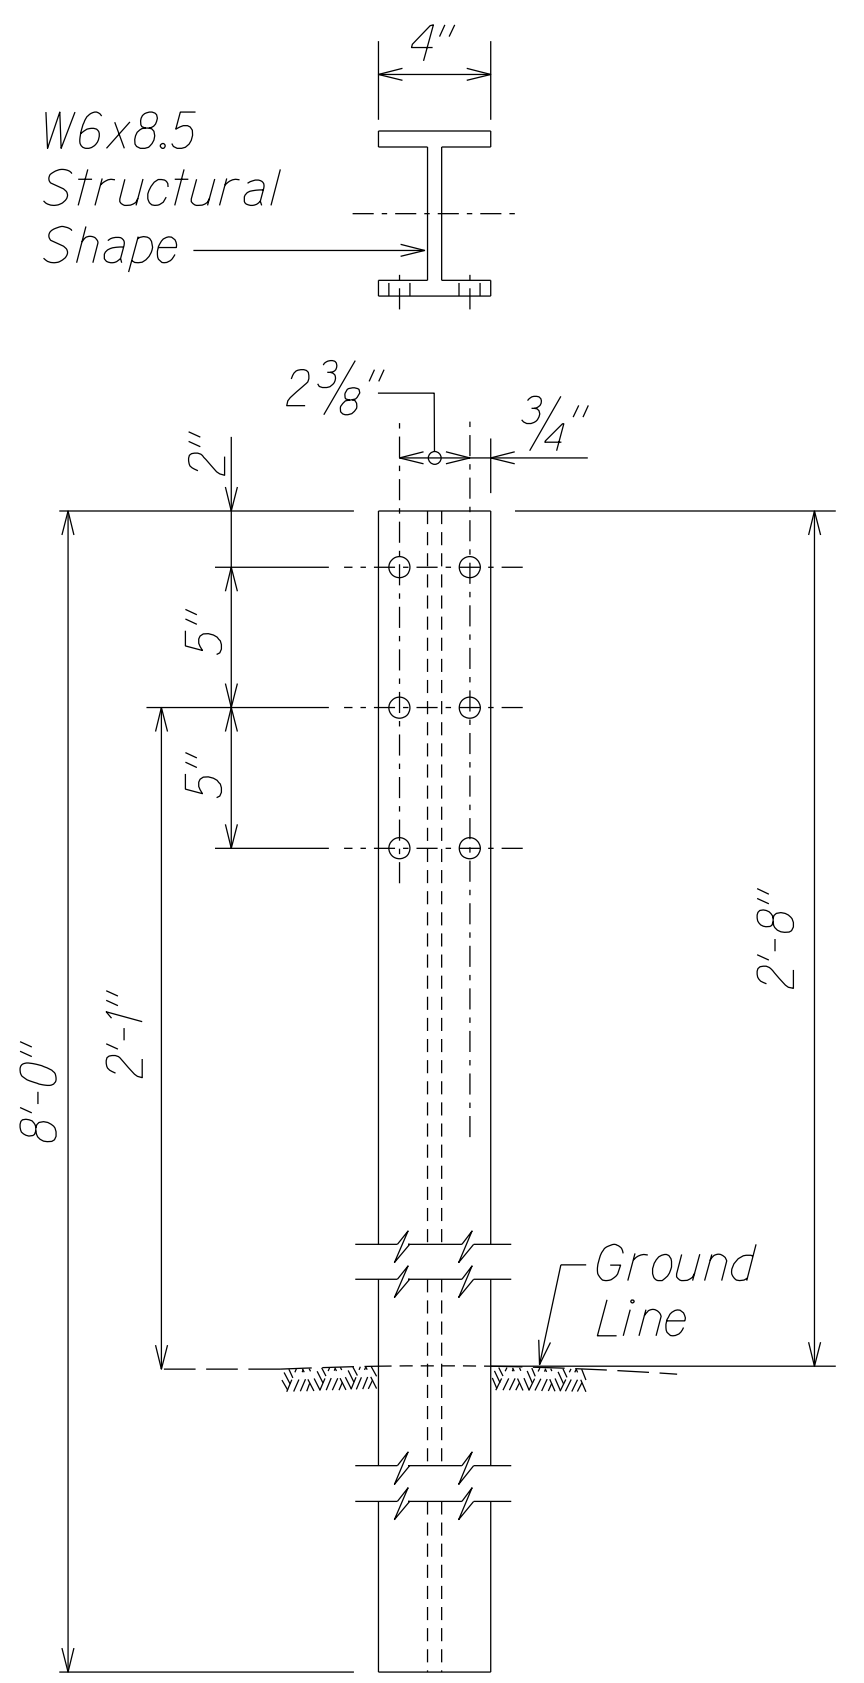


FRONT

W-BEAM STRONG POST (PWE01)


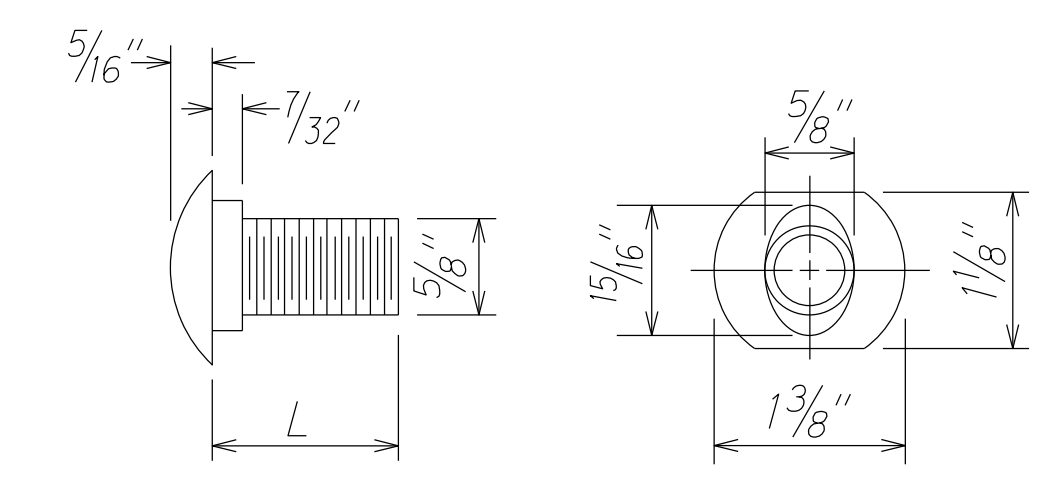


DESIGNATOR	L
FBB01	1 3/8"
FBB02	2"
FBB03	10"

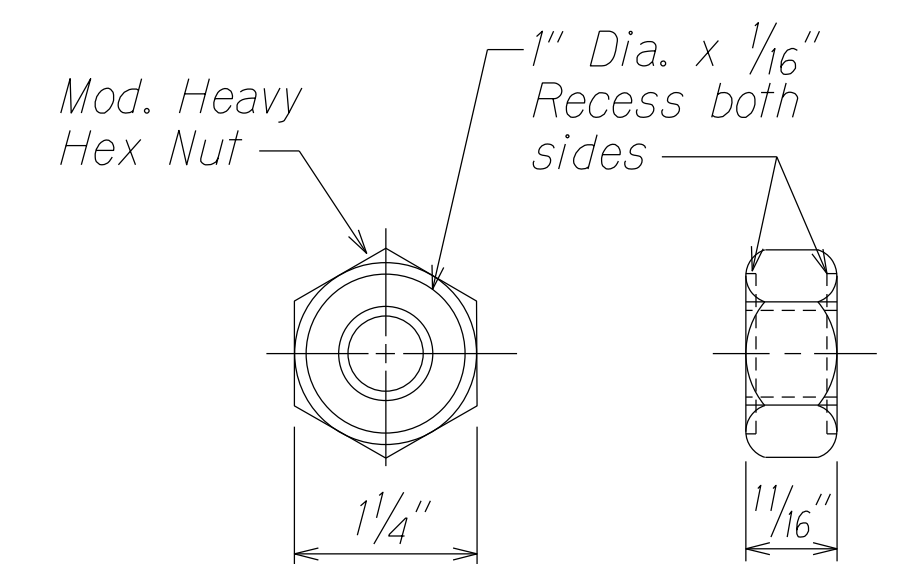



GUARDRAIL BOLTS AND RECESSED NUT

DESIGNATOR	BASE METAL THICKNESS
RWM04a	12 Gauge

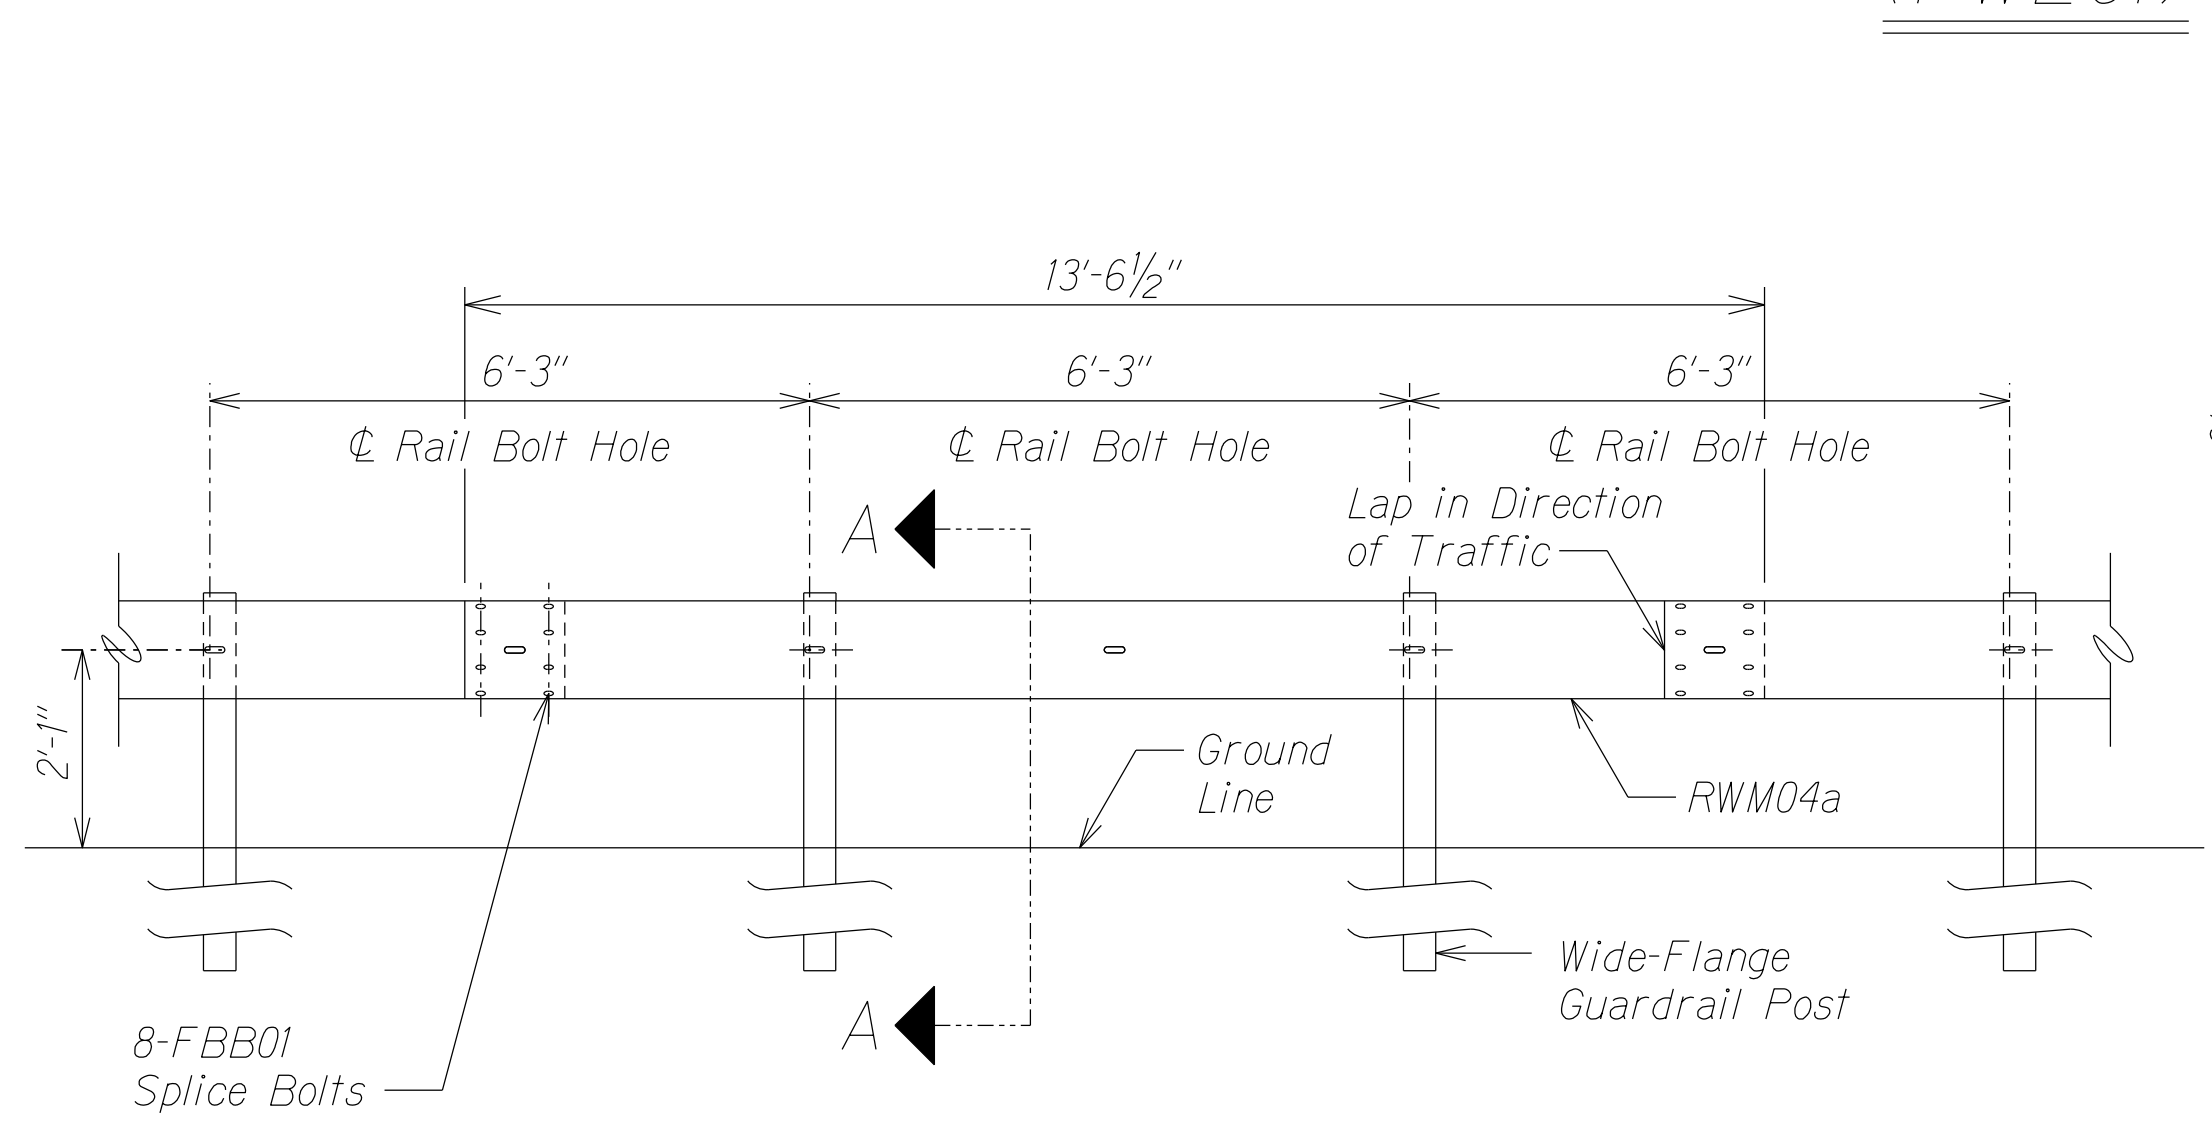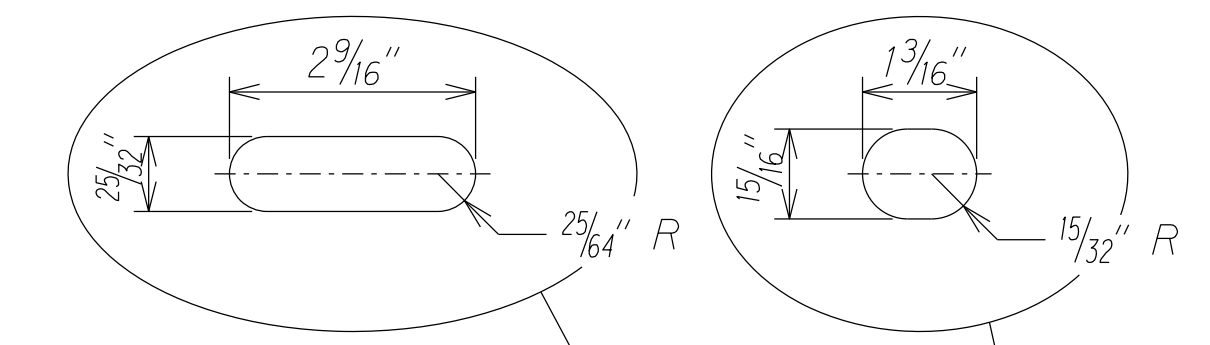

ELEVATION

MIDWEST GUARDRAIL SYSTEM WITH STANDARD 8" OFFSET BLOCK (SGR47)


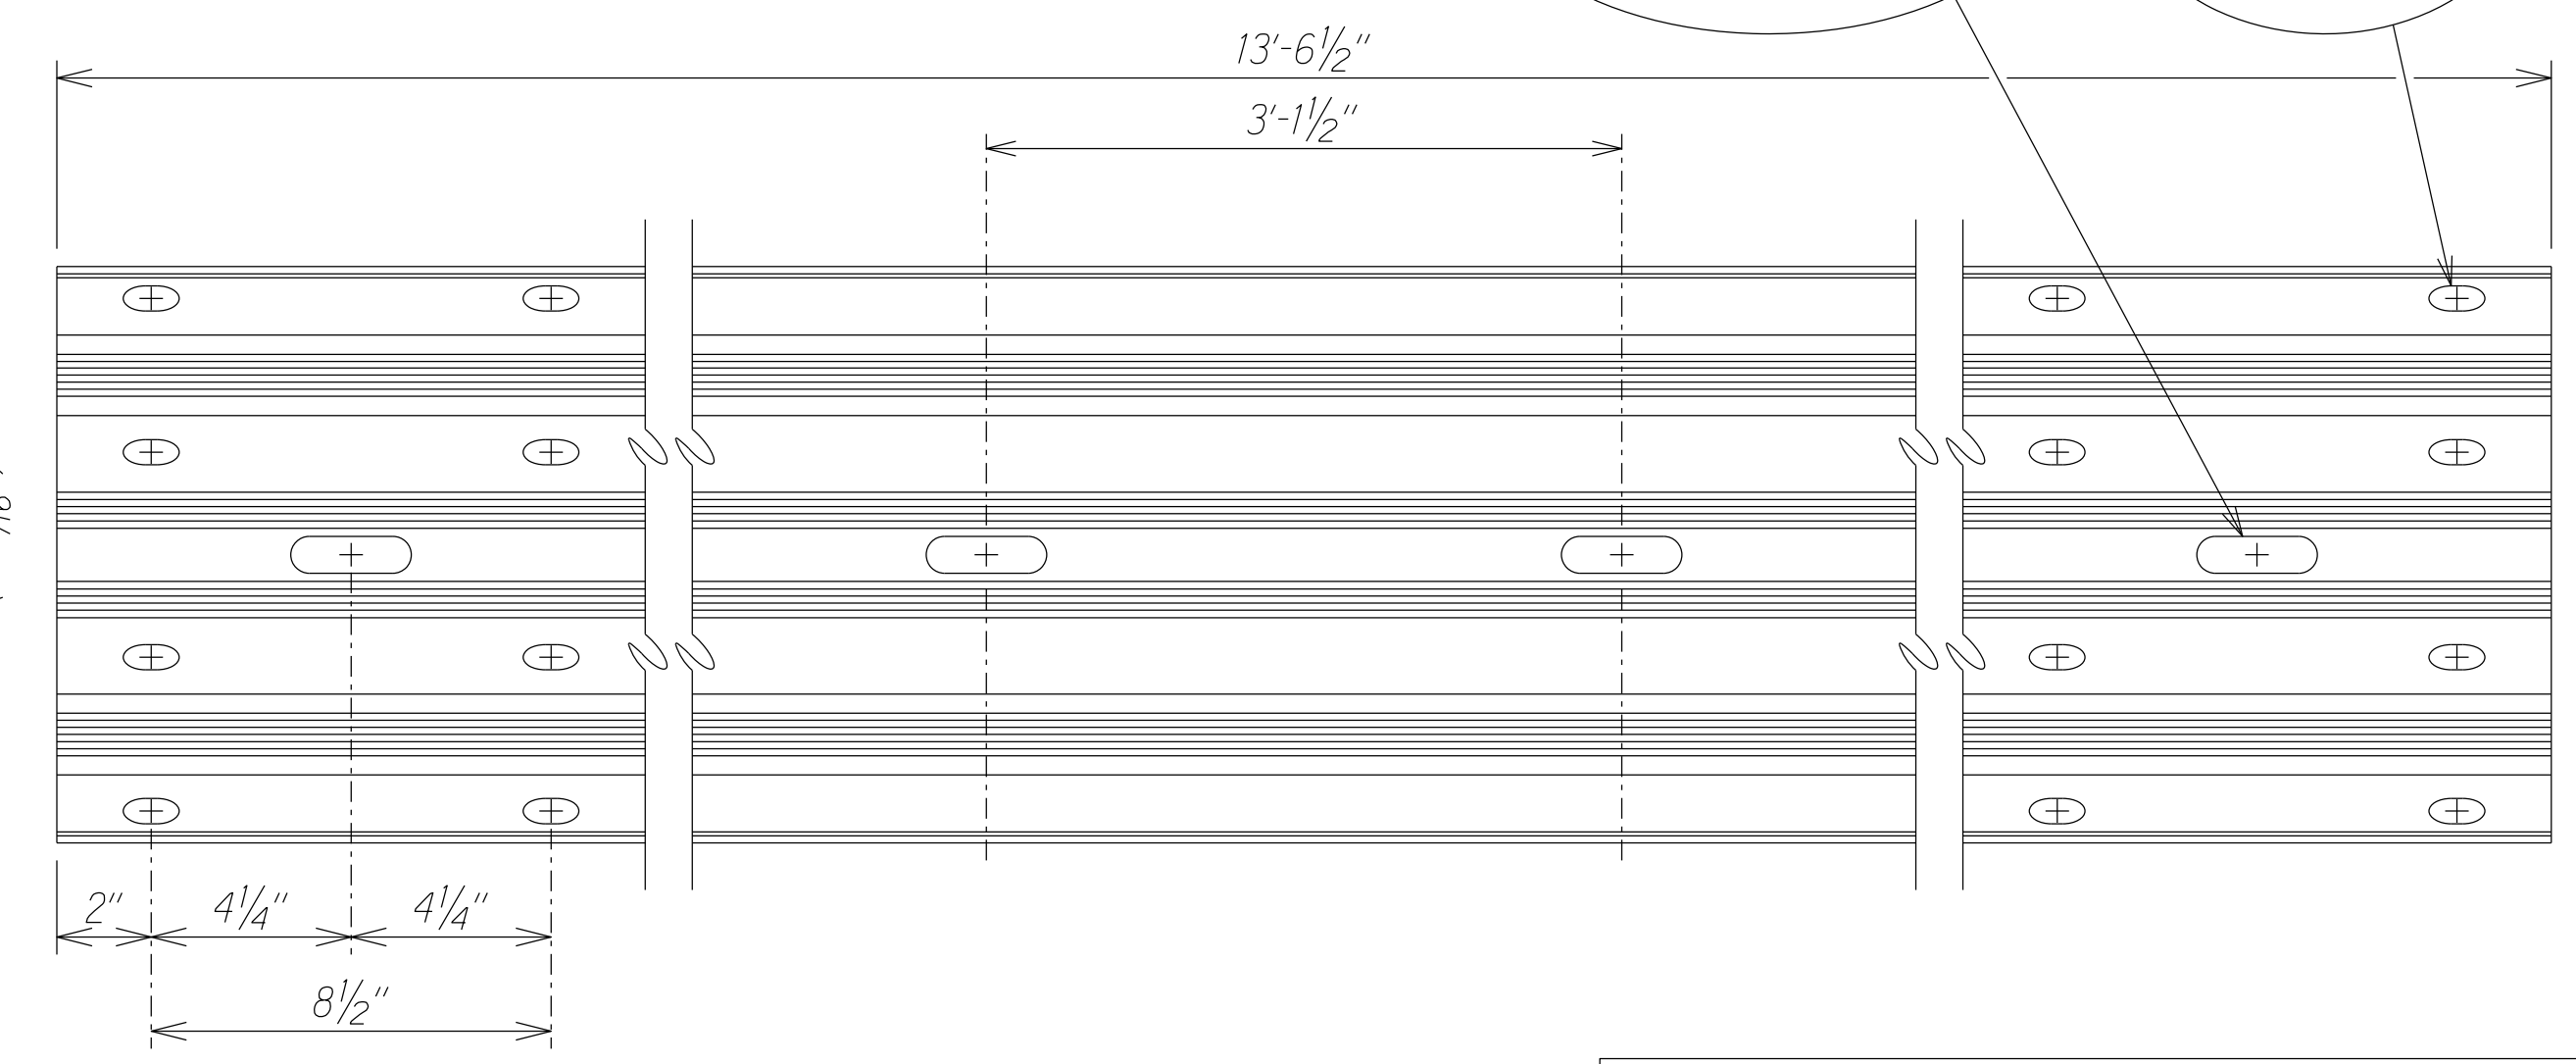
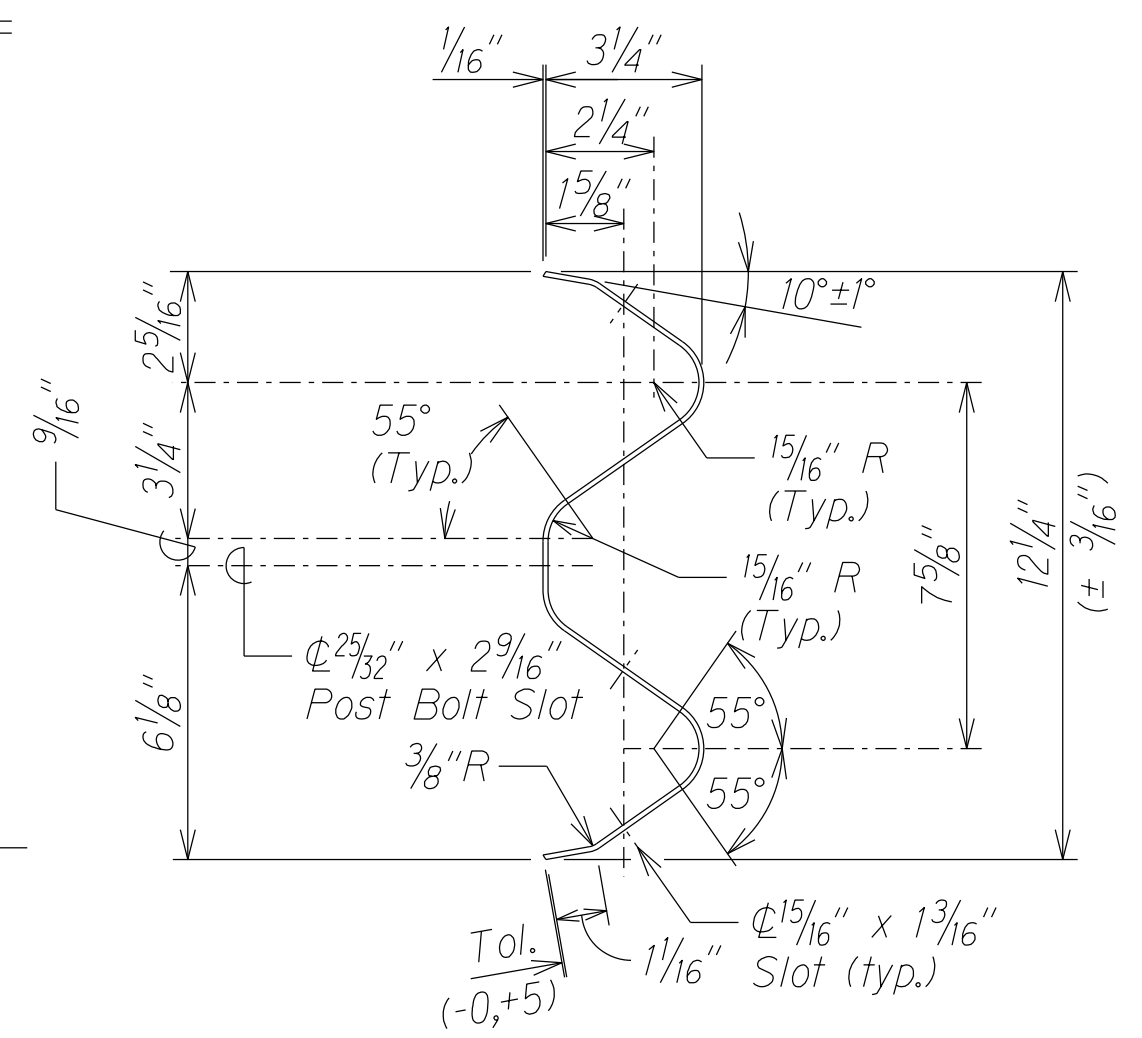


4 SPACE W-BEAM GUARDRAIL (RWM04a)


ORIGINAL PLAN	DATE: 1/11/22
SURVEY PLOTTED BY	
DRAWN BY	
DESIGNED BY	
NOTE BOOK REFERENCE	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
31" W-BEAM GUARDRAIL WITH STANDARD 8" OFFSET BLOCK
KAUAI HIGWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18
Scale: Not to scale Date: January 2022
SHEET No. 2 OF 5 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	13	30

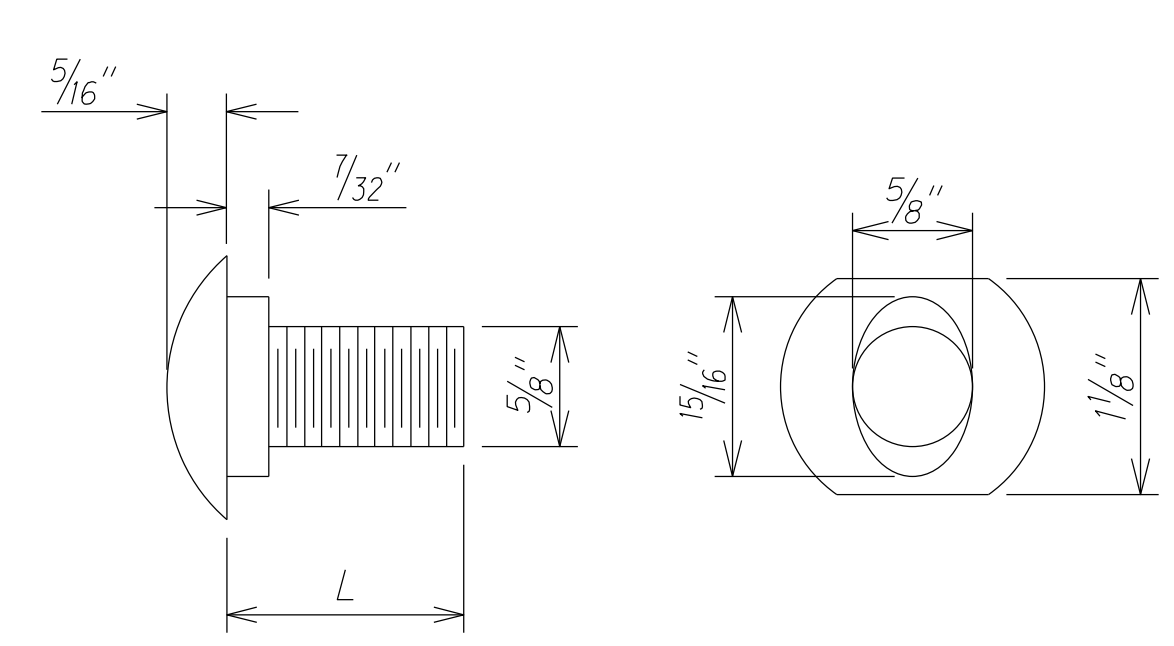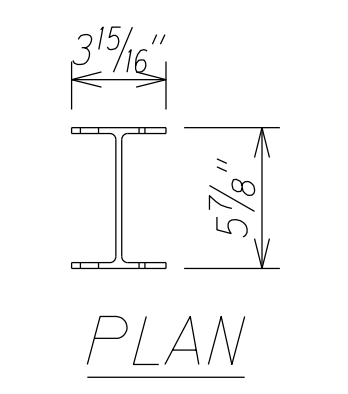
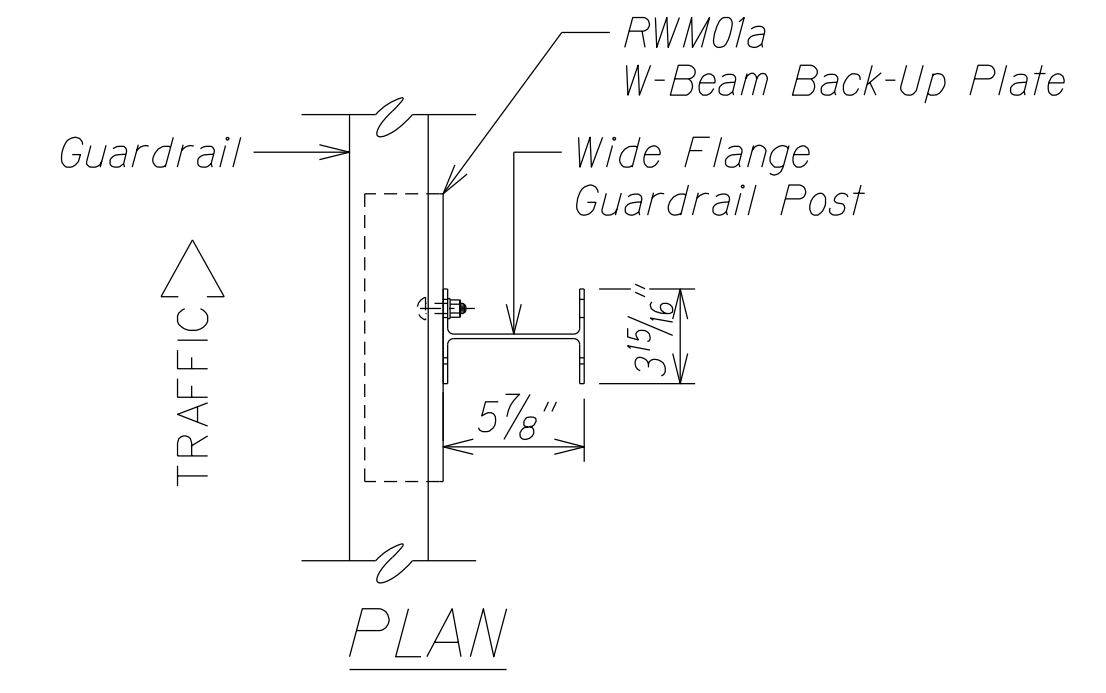


DESIGNATOR	L
FBB01	1 3/8"
FBB02	2"

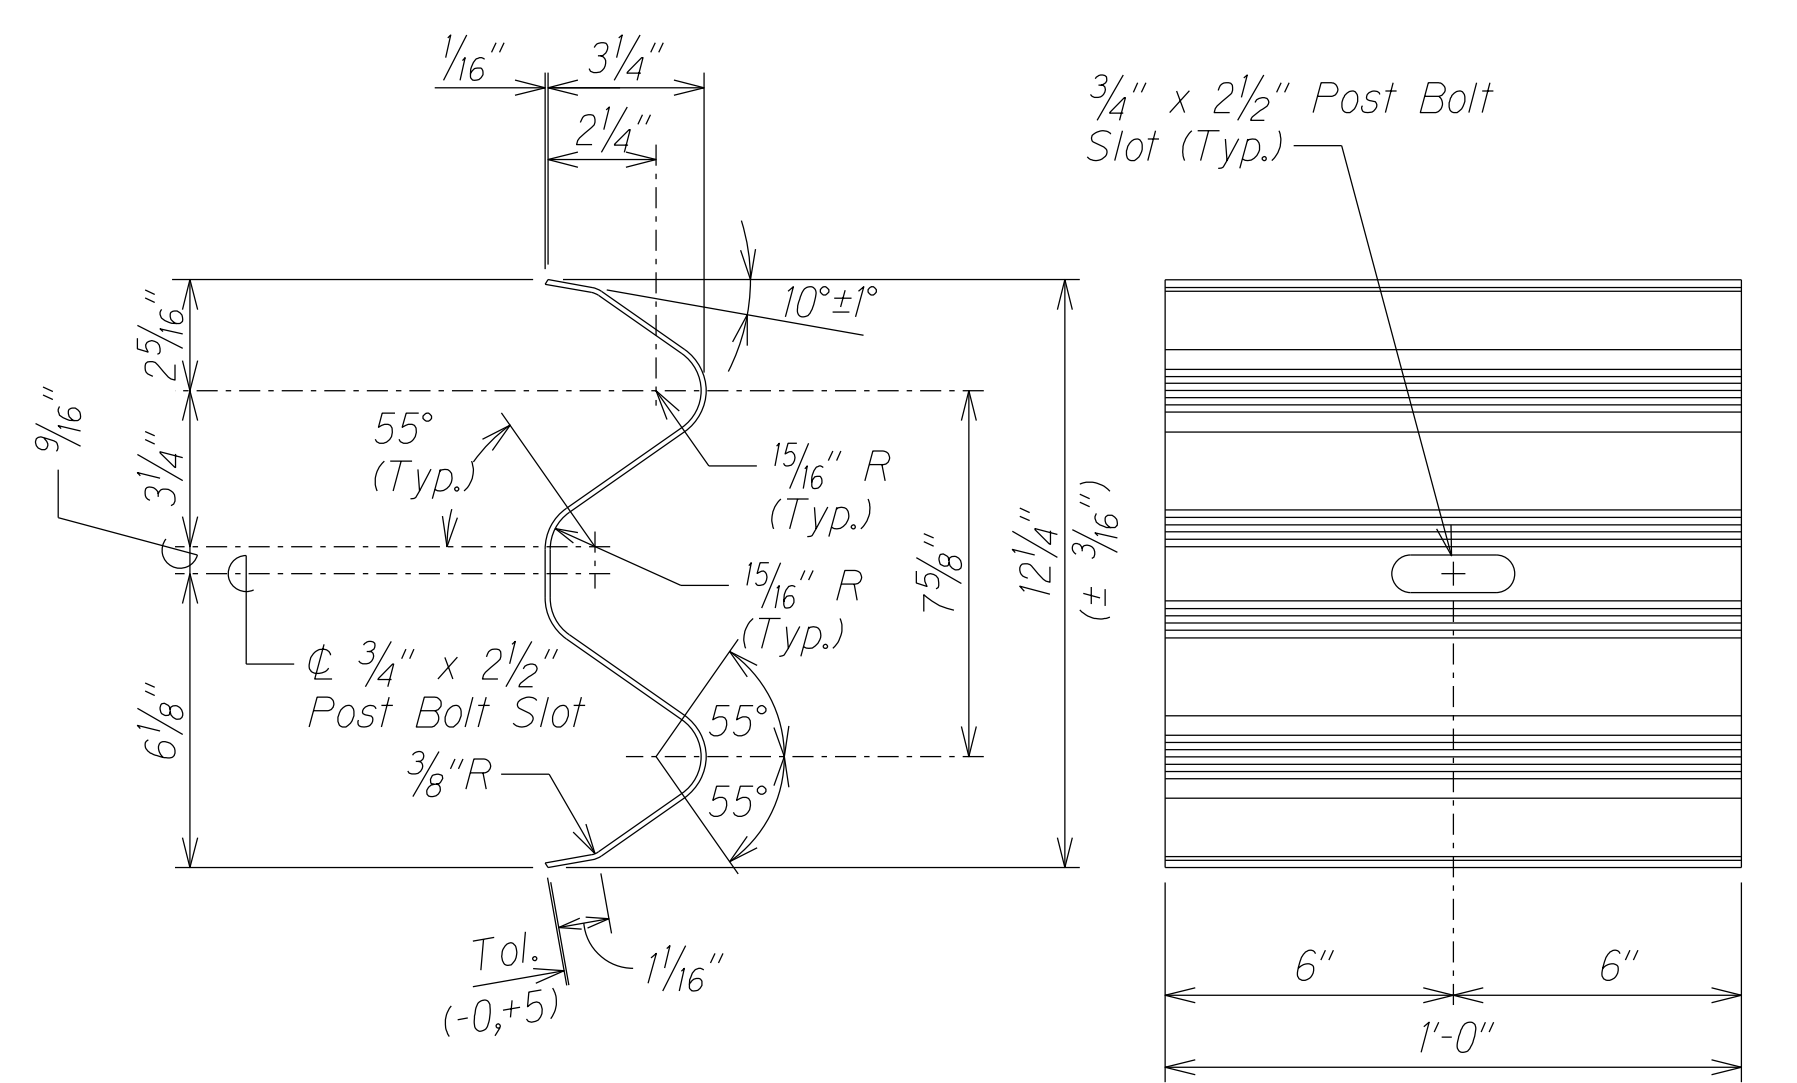


DESIGNATOR	BASE METAL THICKNESS
RWM01a	12 Gauge

W-BEAM BACK-UP PLATE (RWM01a)

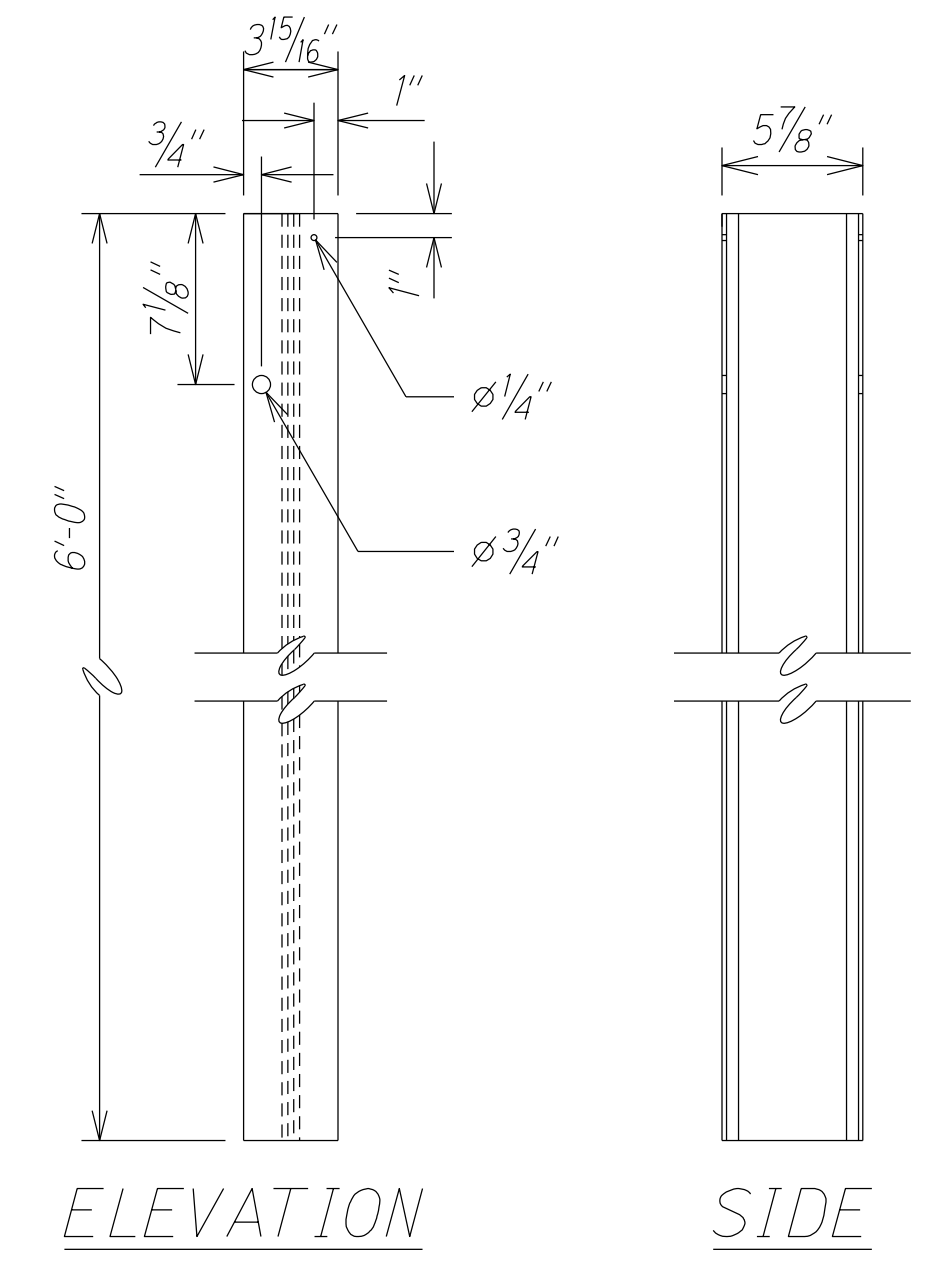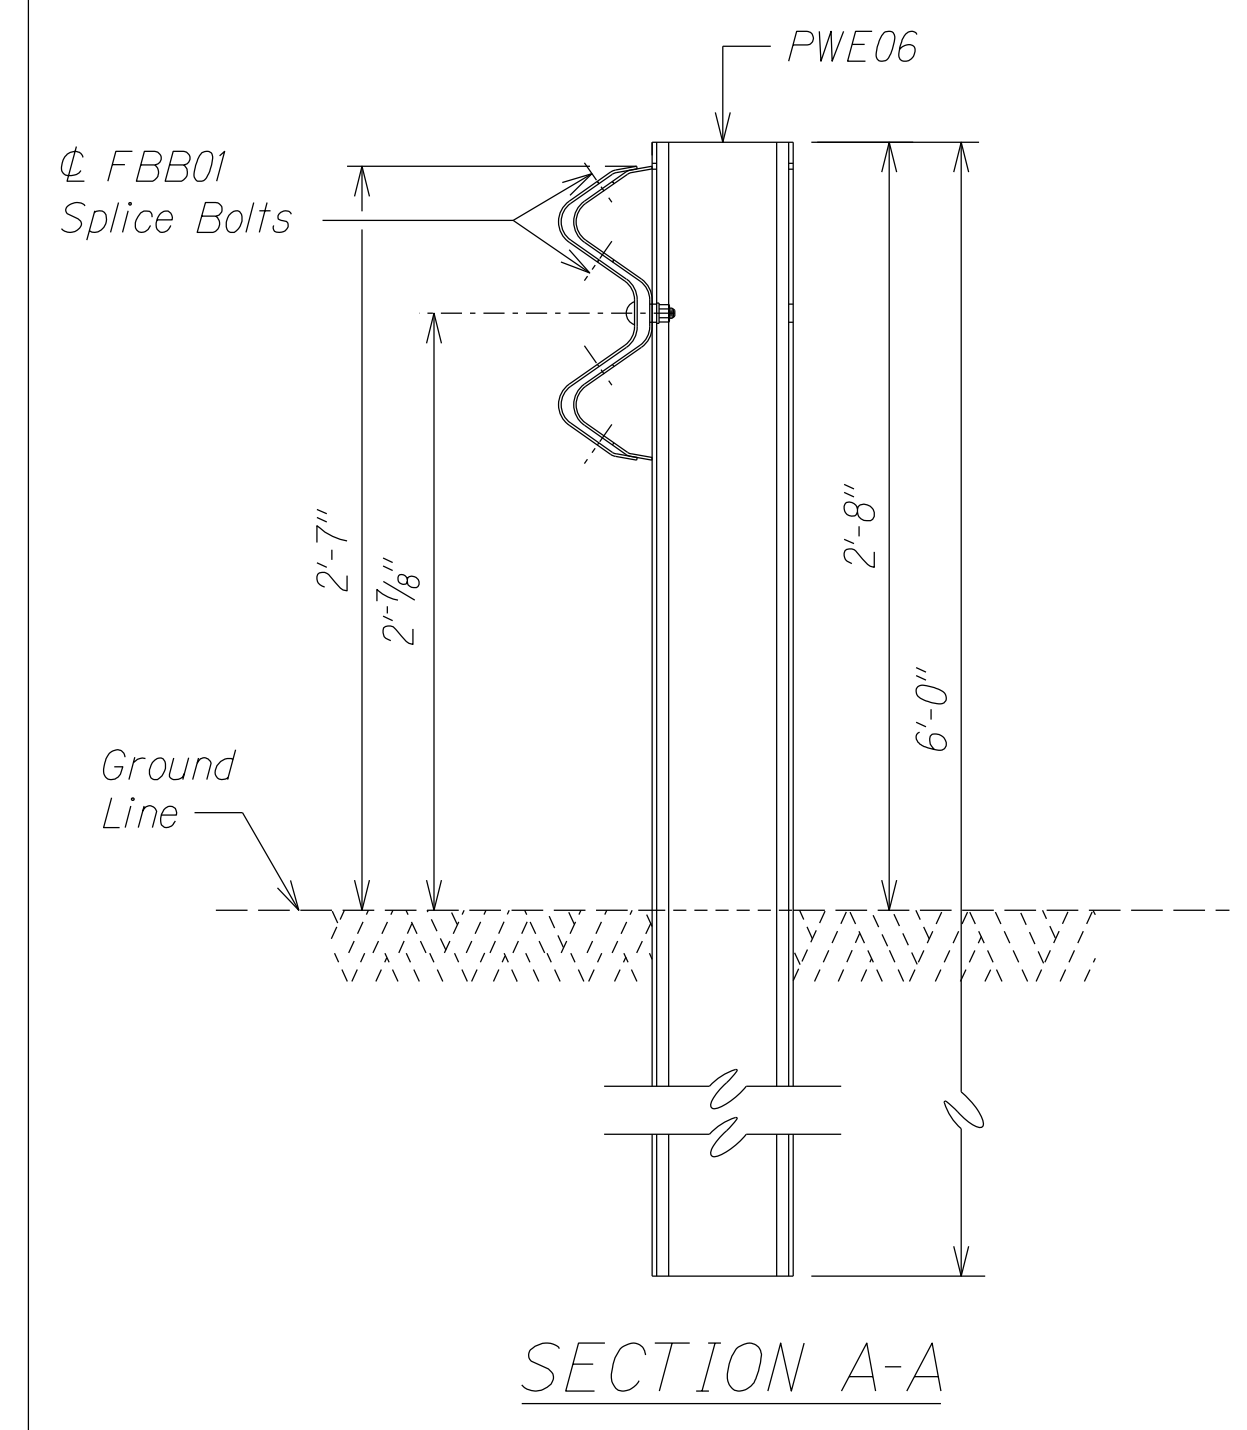


WIDE-FLANGE GUARDRAIL POST (PWE06)


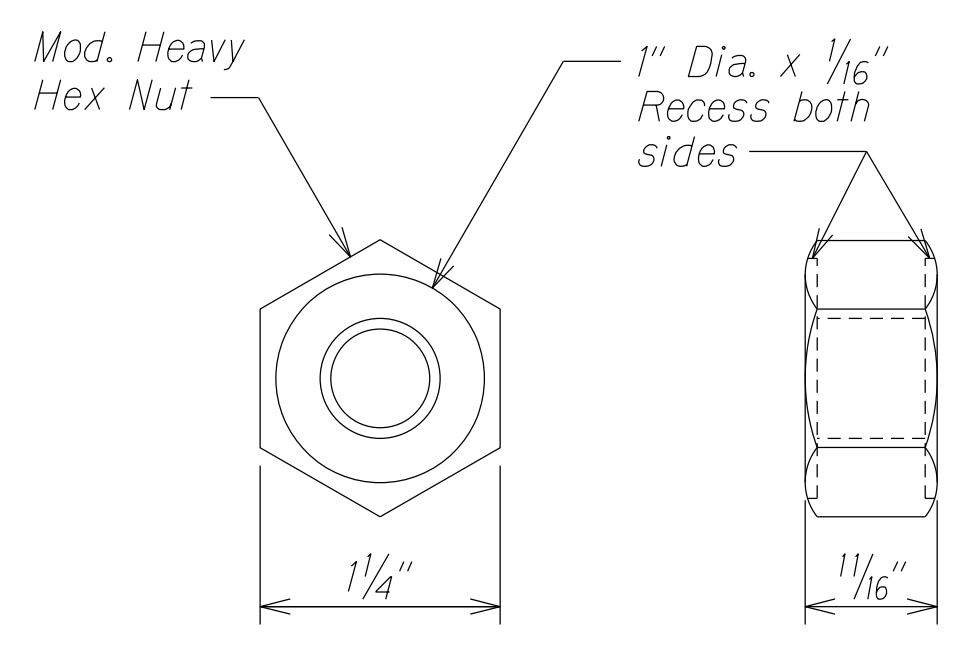


GUARDRAIL BOLTS AND RECESSED NUT

DATE	_____
SURVEY PLOTTED BY	_____
DRAWN BY	_____
DESIGNED BY	_____
NOTE BOOK	_____
QUANTITIES BY	_____
CHECKED BY	_____

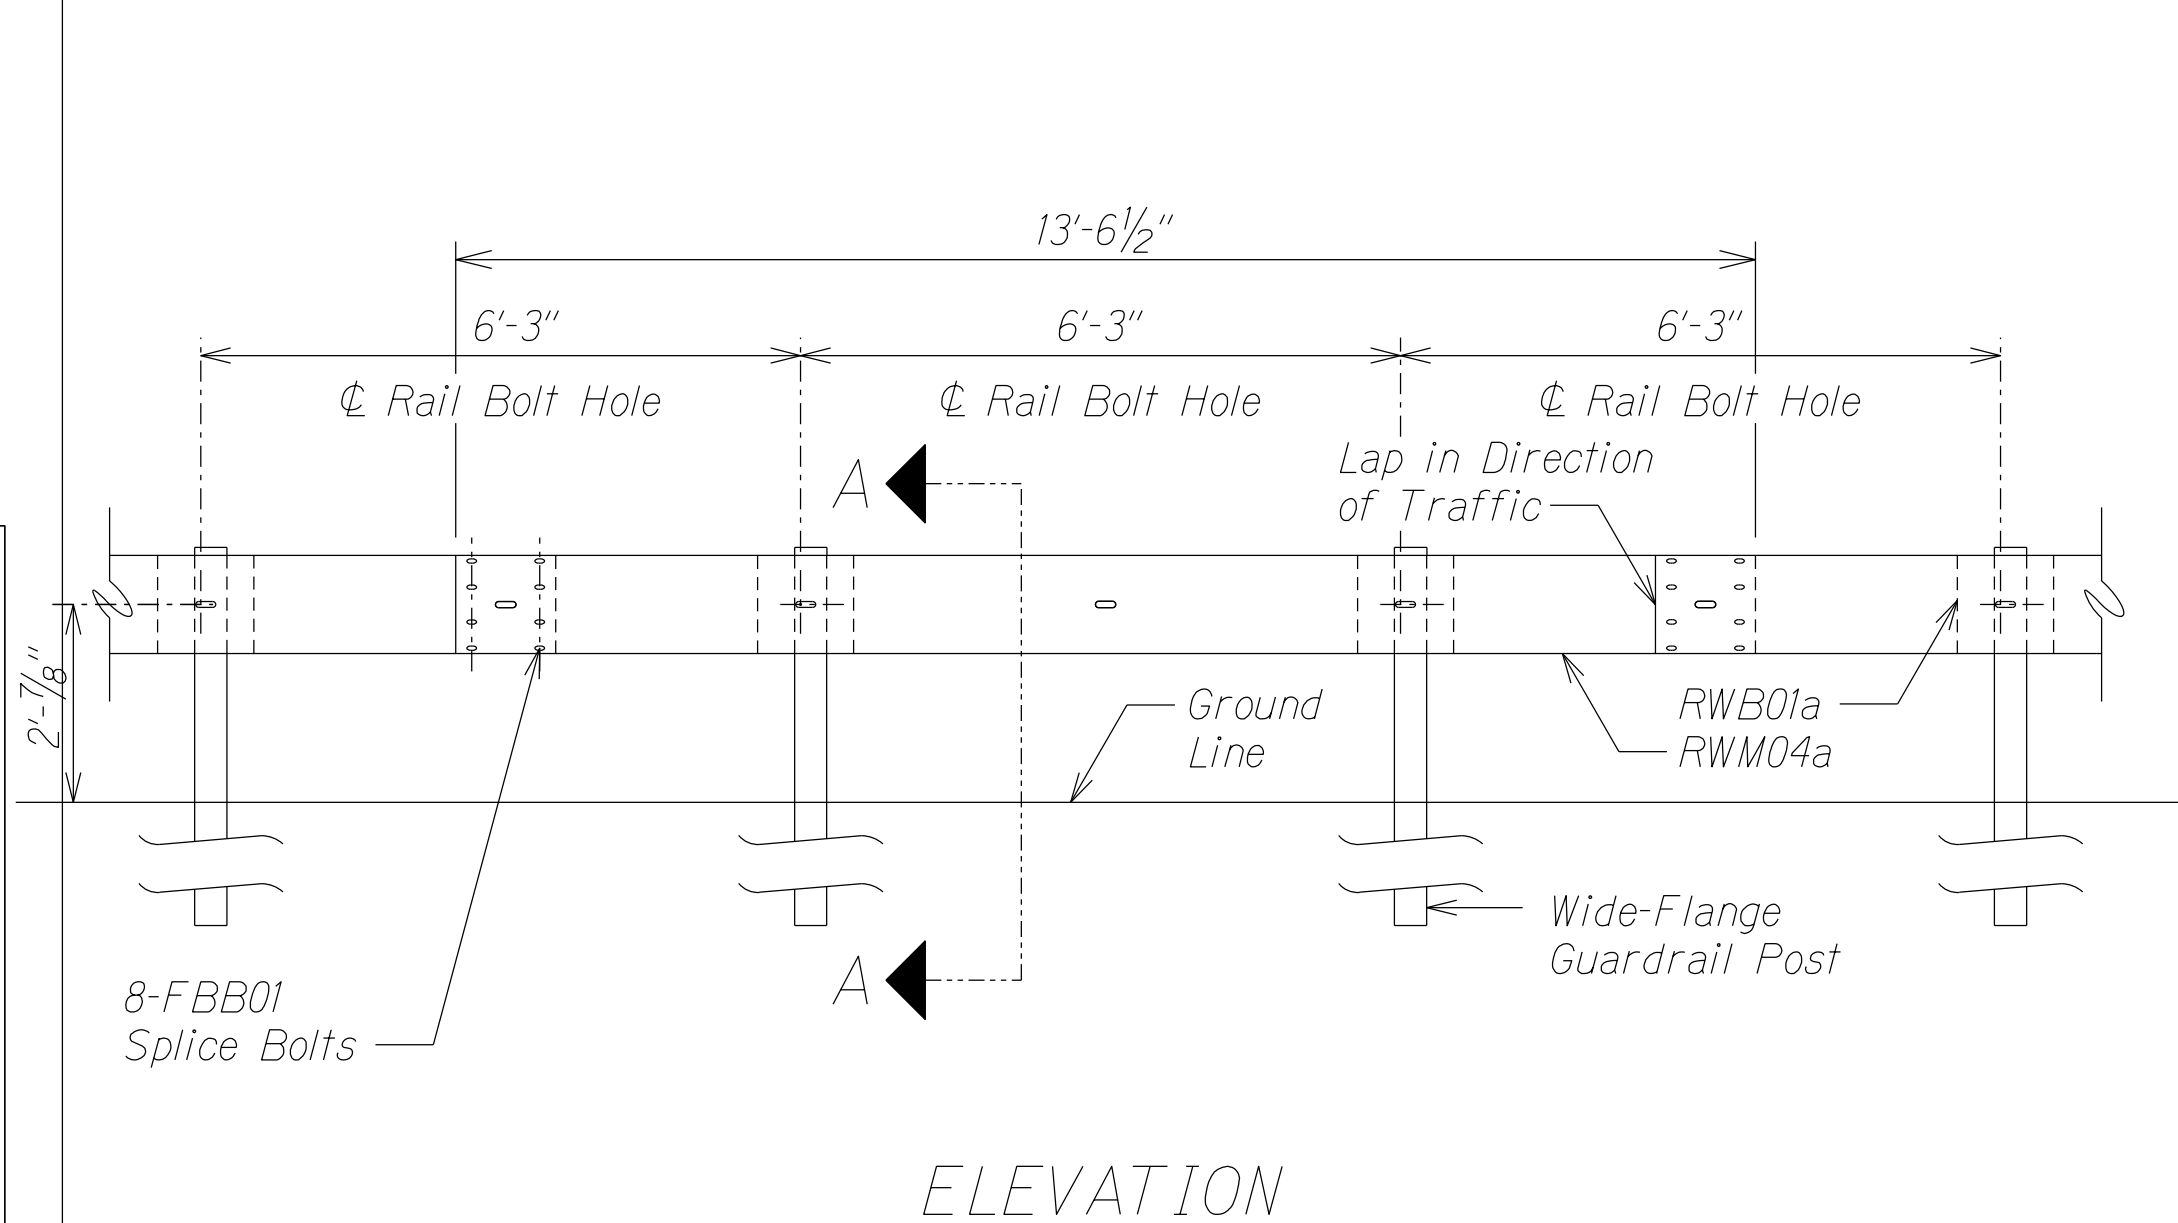

MIDWEST GUARDRAIL SYSTEM WITH NO BLOCKOUTS (SGR41)

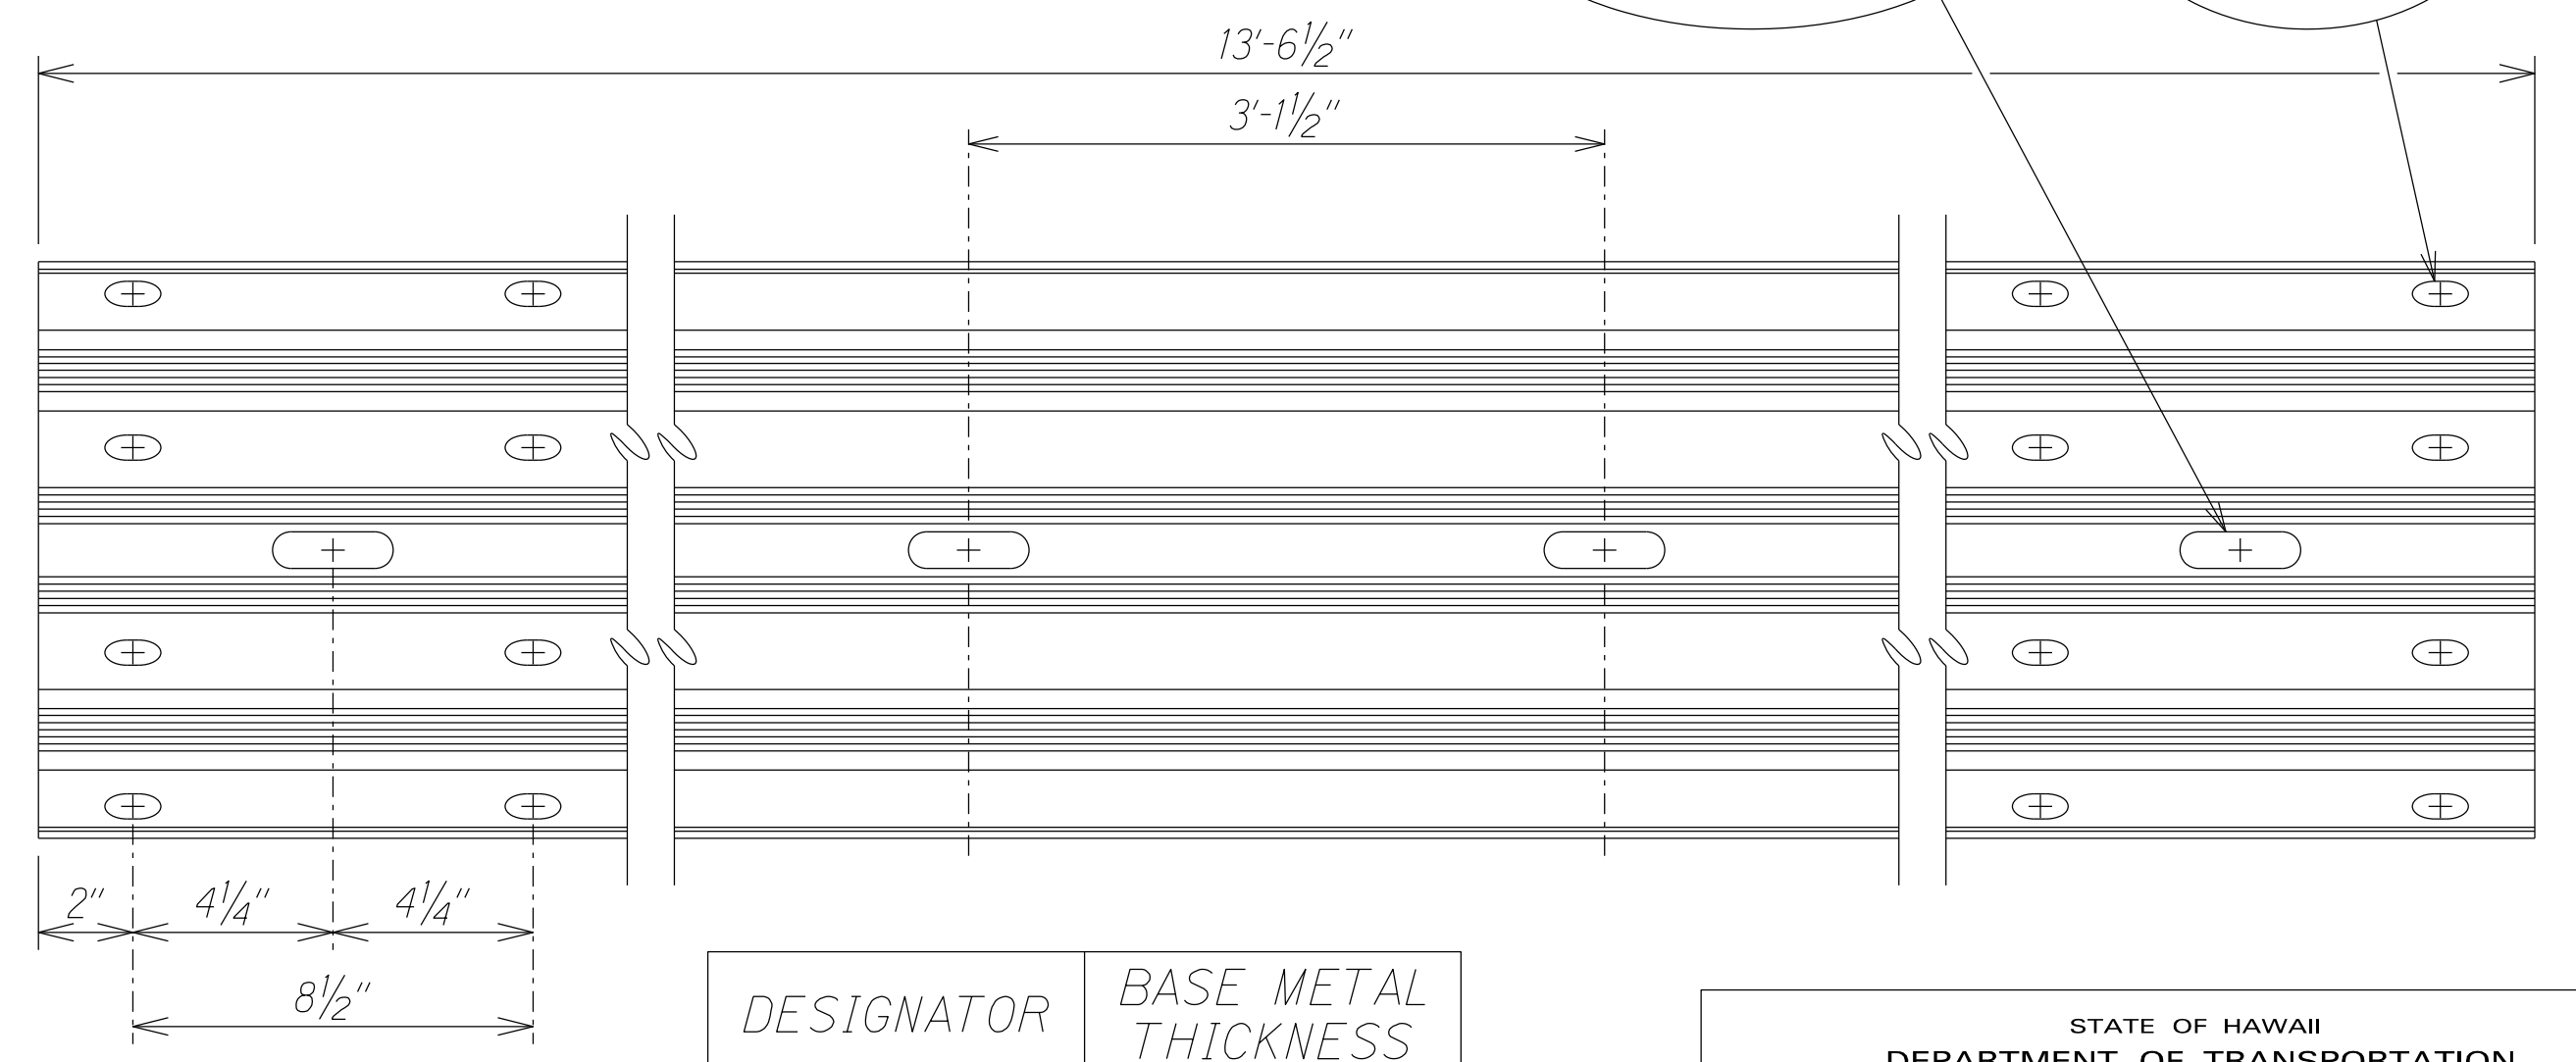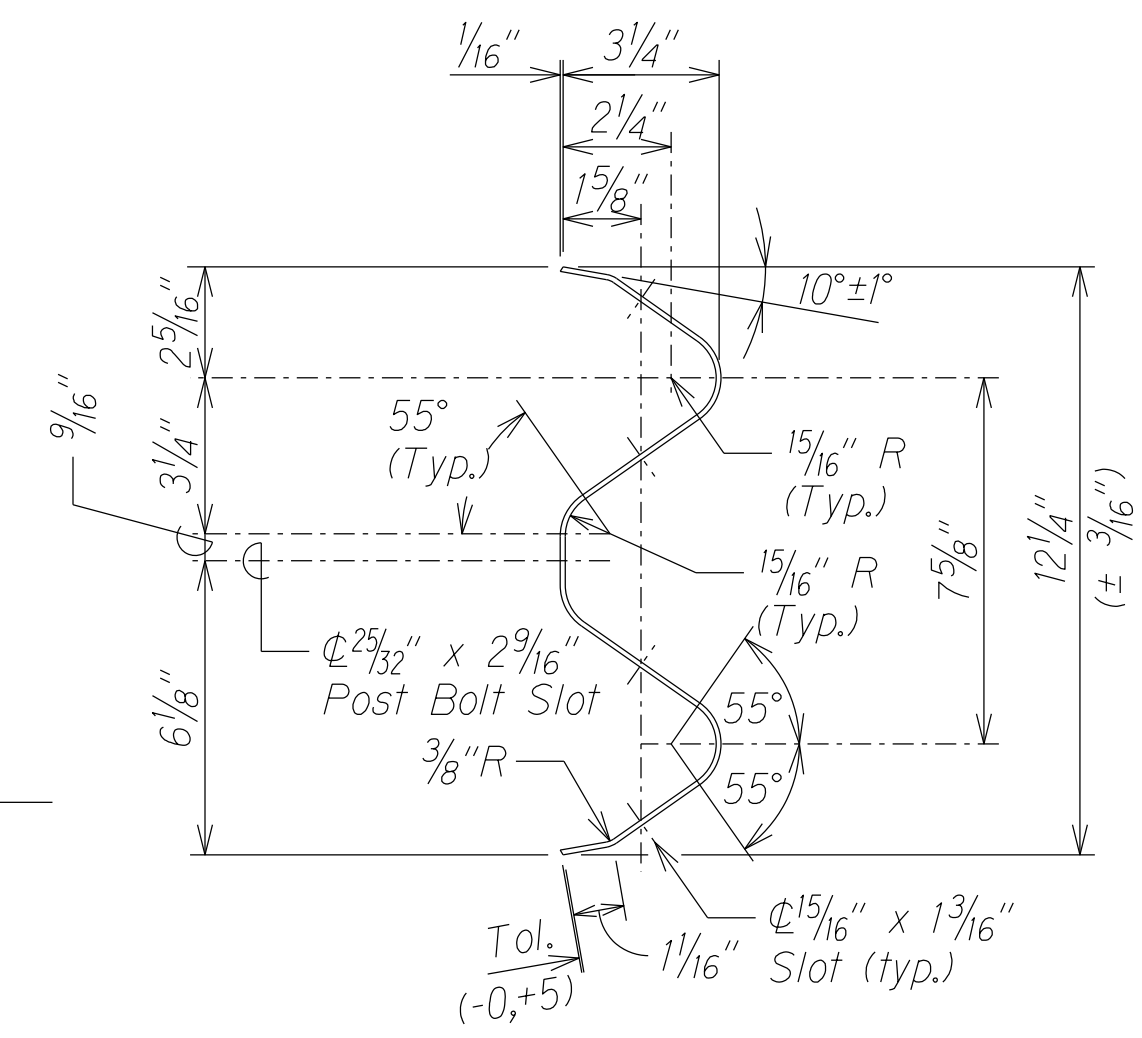

DESIGNATOR	BASE METAL THICKNESS
RWM04a	12 Gauge

4 SPACE W-BEAM GUARDRAIL (RWM04a)

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


MIDWEST GUARDRAIL SYSTEM WITH
NO OFFSET BLOCK

KAUAIU HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18


Scale: Not to scale Date: January 2022

SHEET No. 3 OF 5 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	14	30

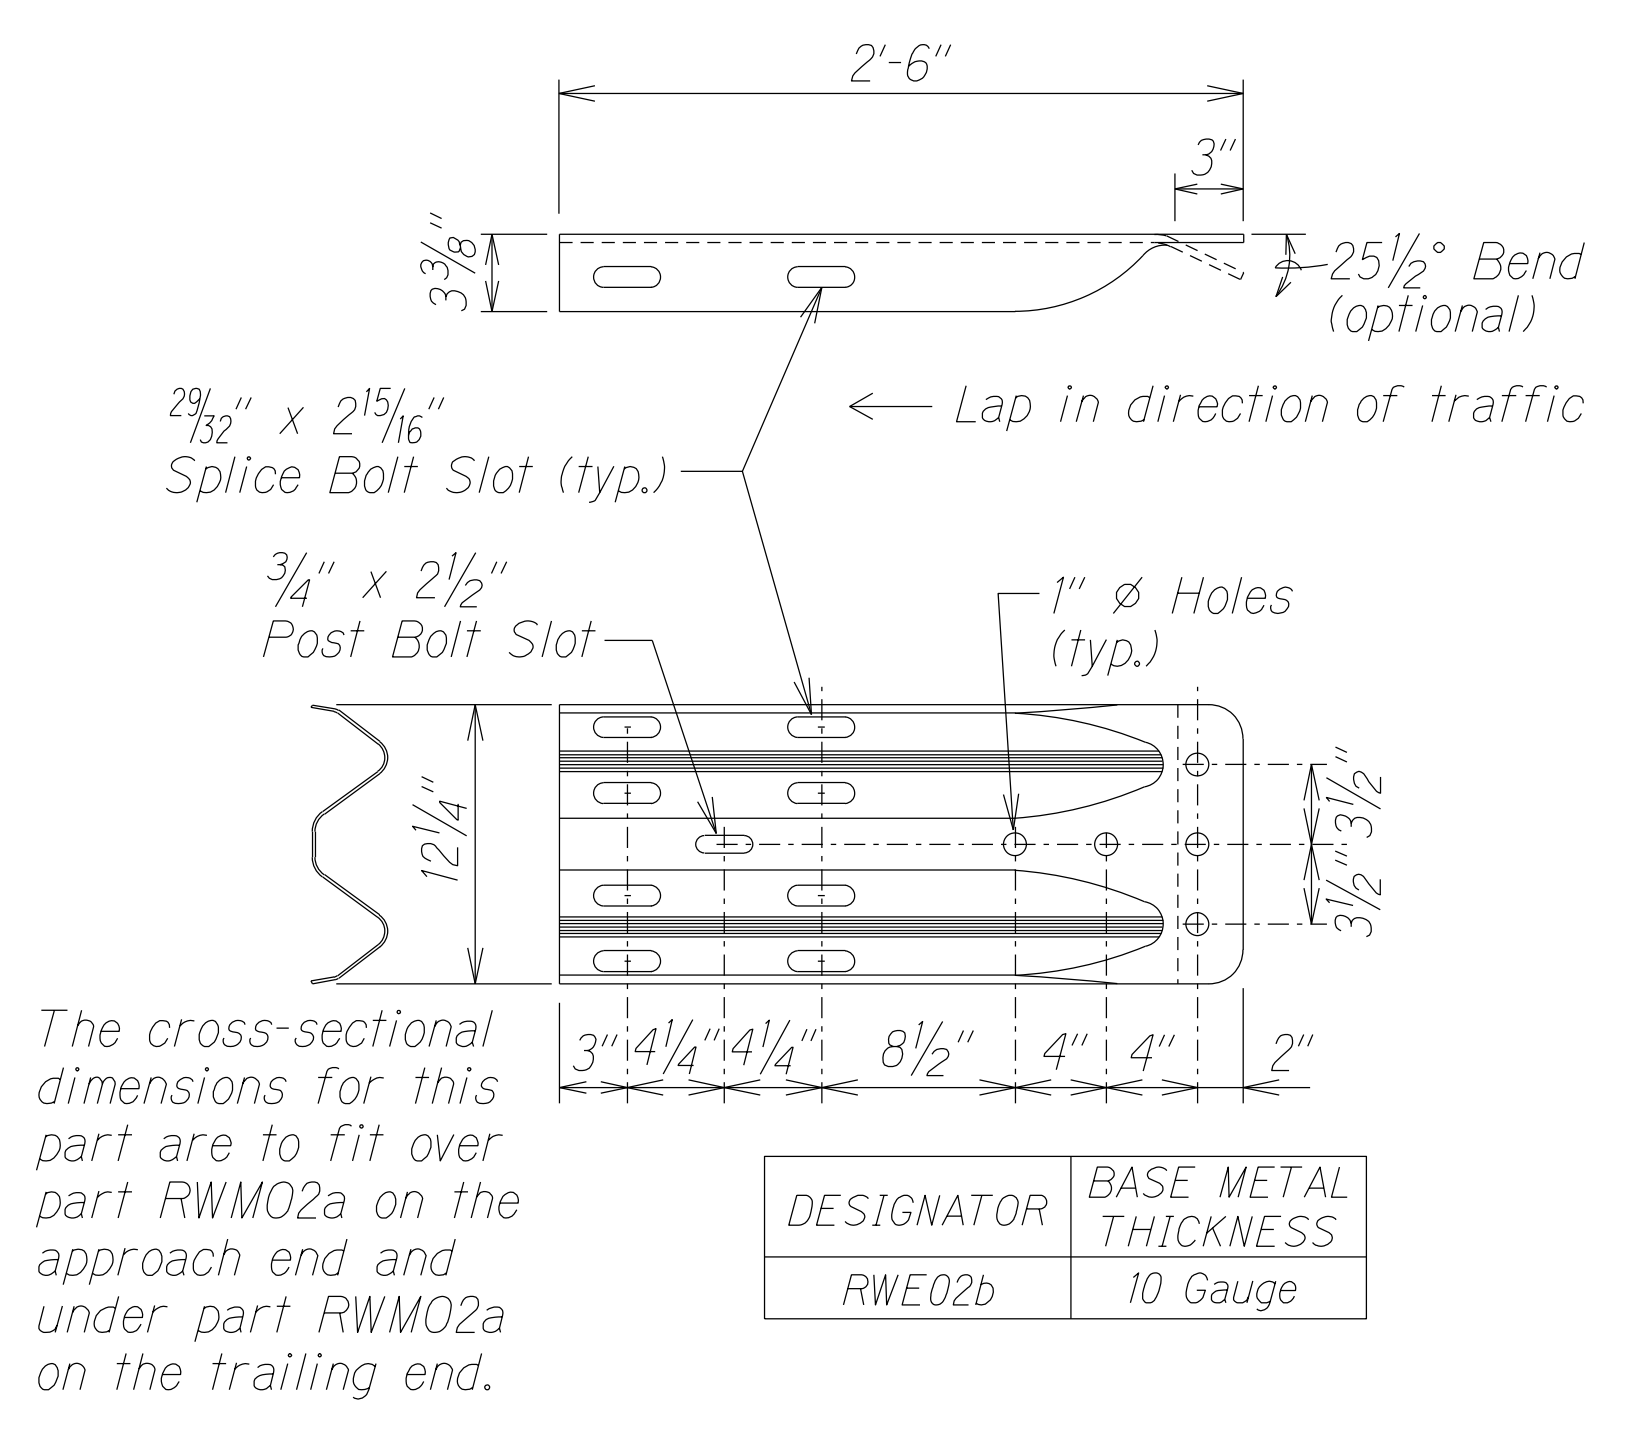


W-BEAM TERMINAL CONNECTOR (RWE02b)

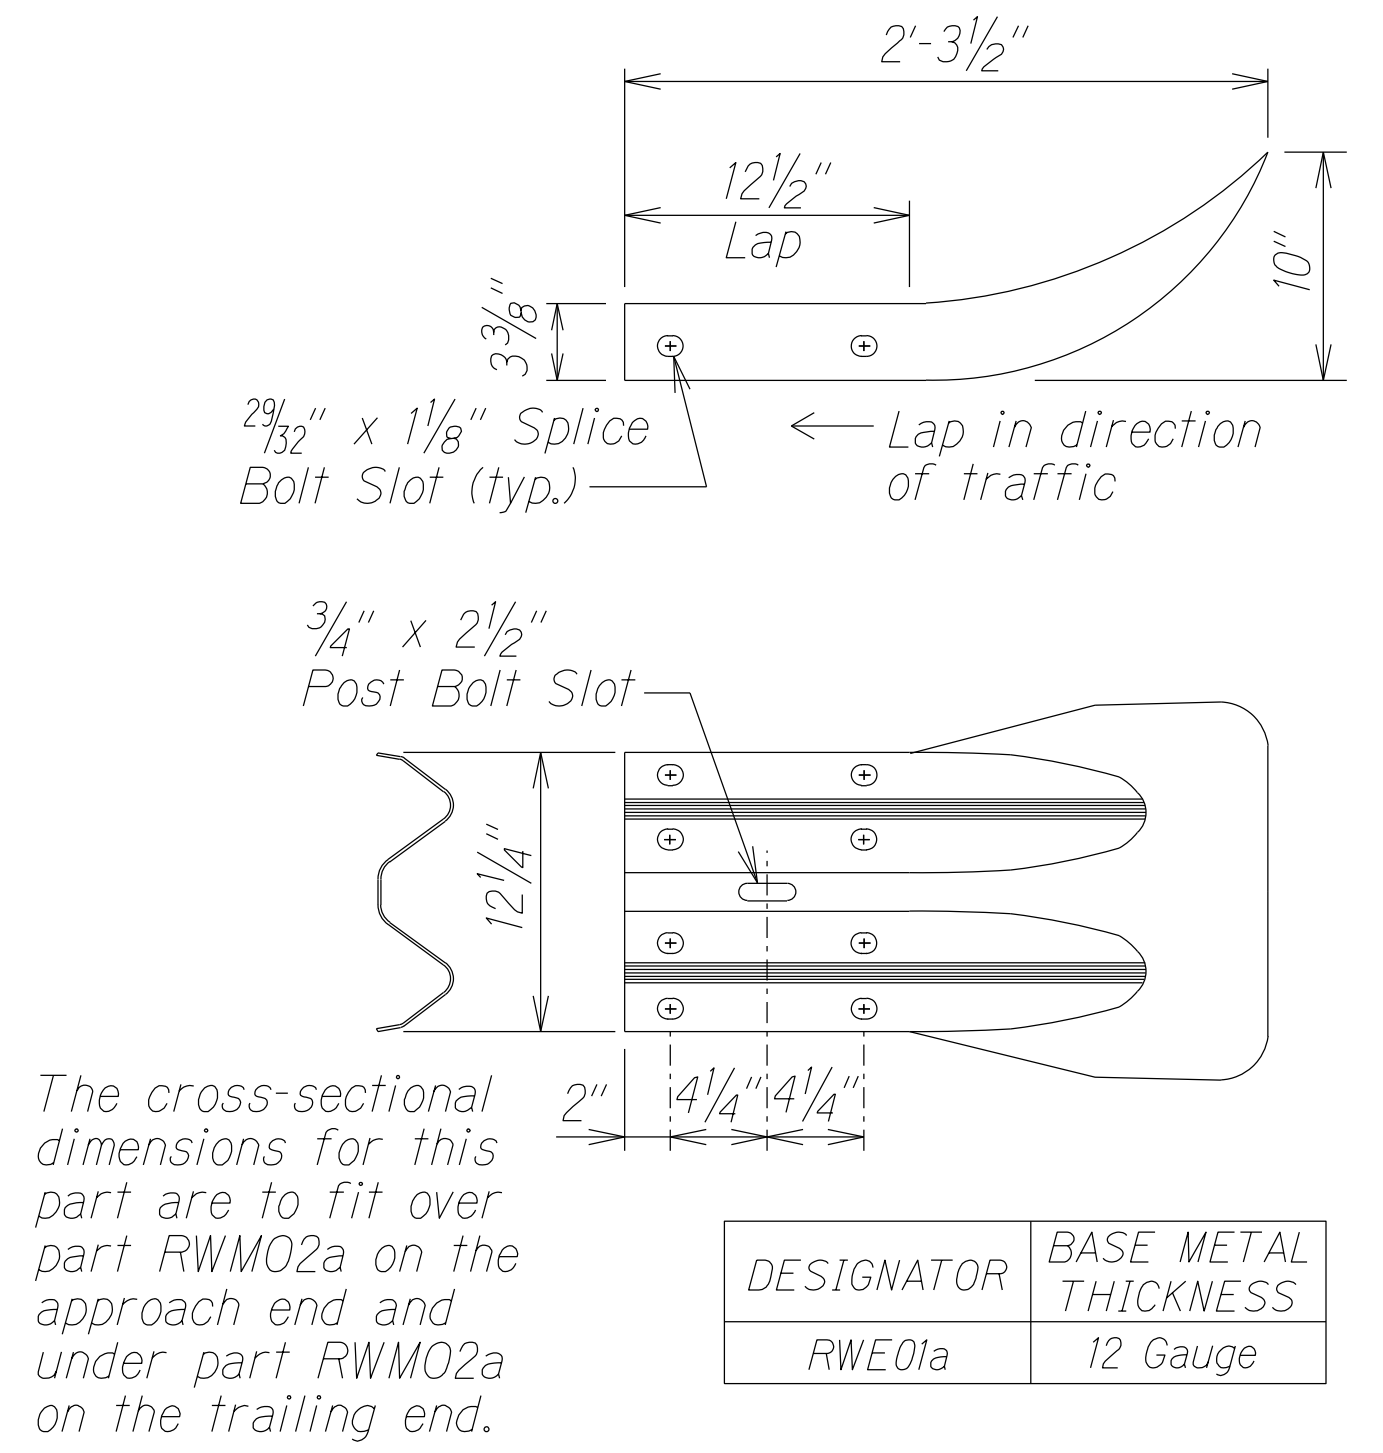


W-BEAM END SECTION (FLARED RWE01a)

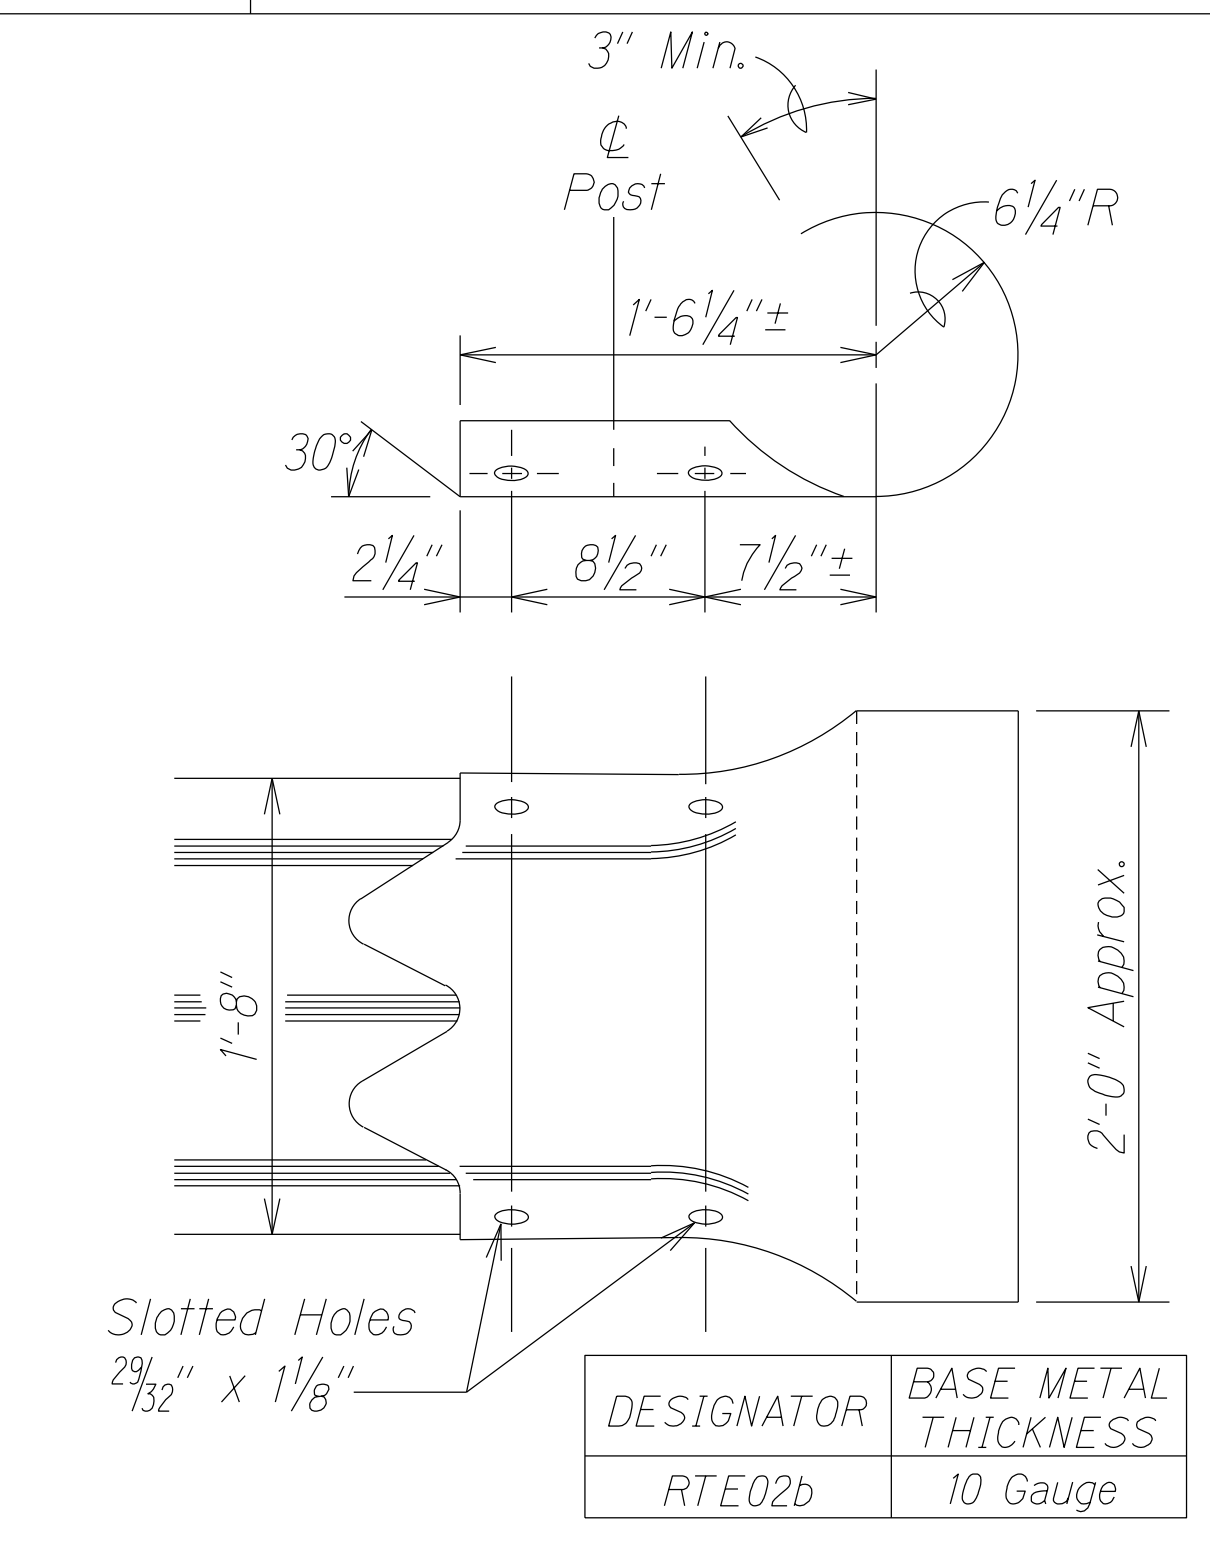


THRIE-BEAM SECTION (ROUNDED) (RTE02b)

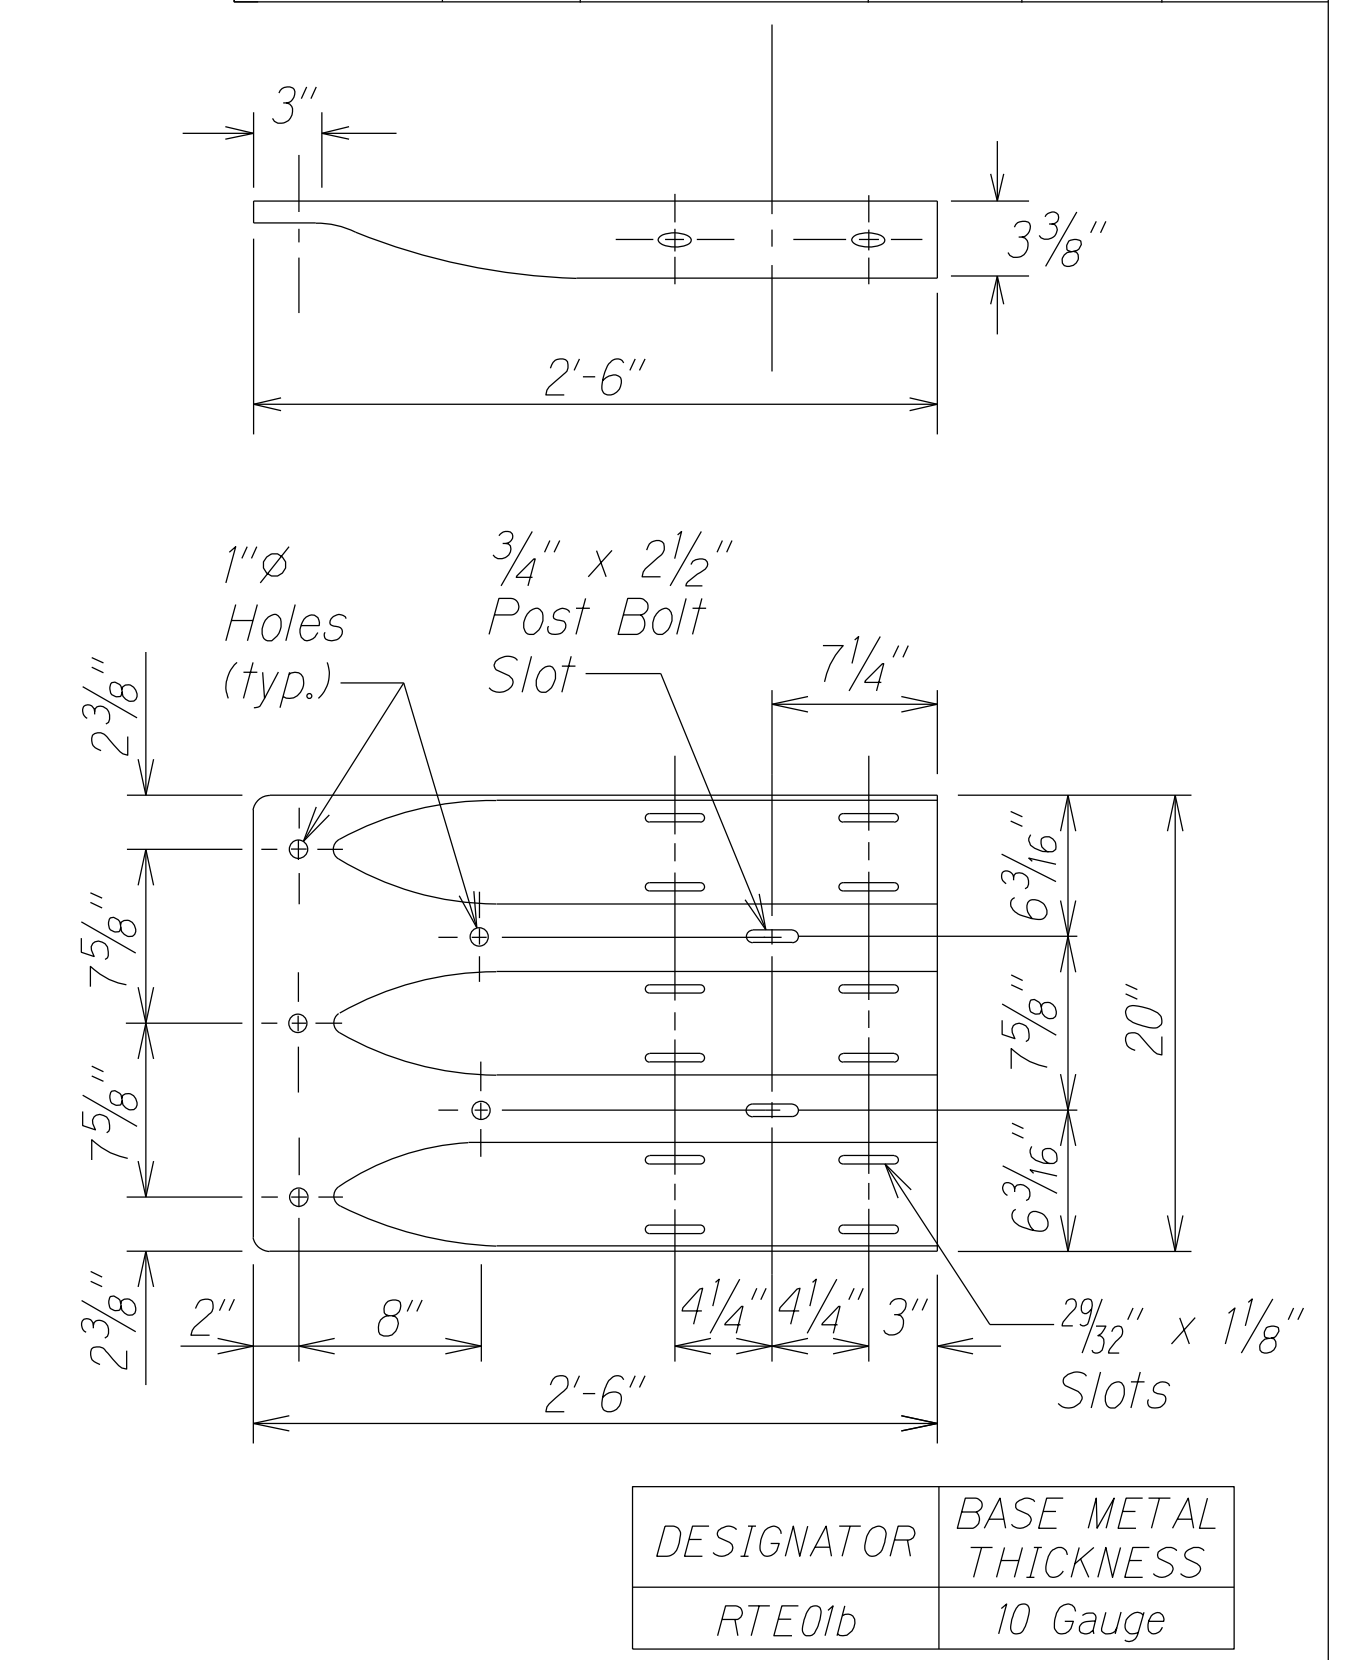


THRIE-BEAM TERMINAL CONNECTOR (RTE01b)

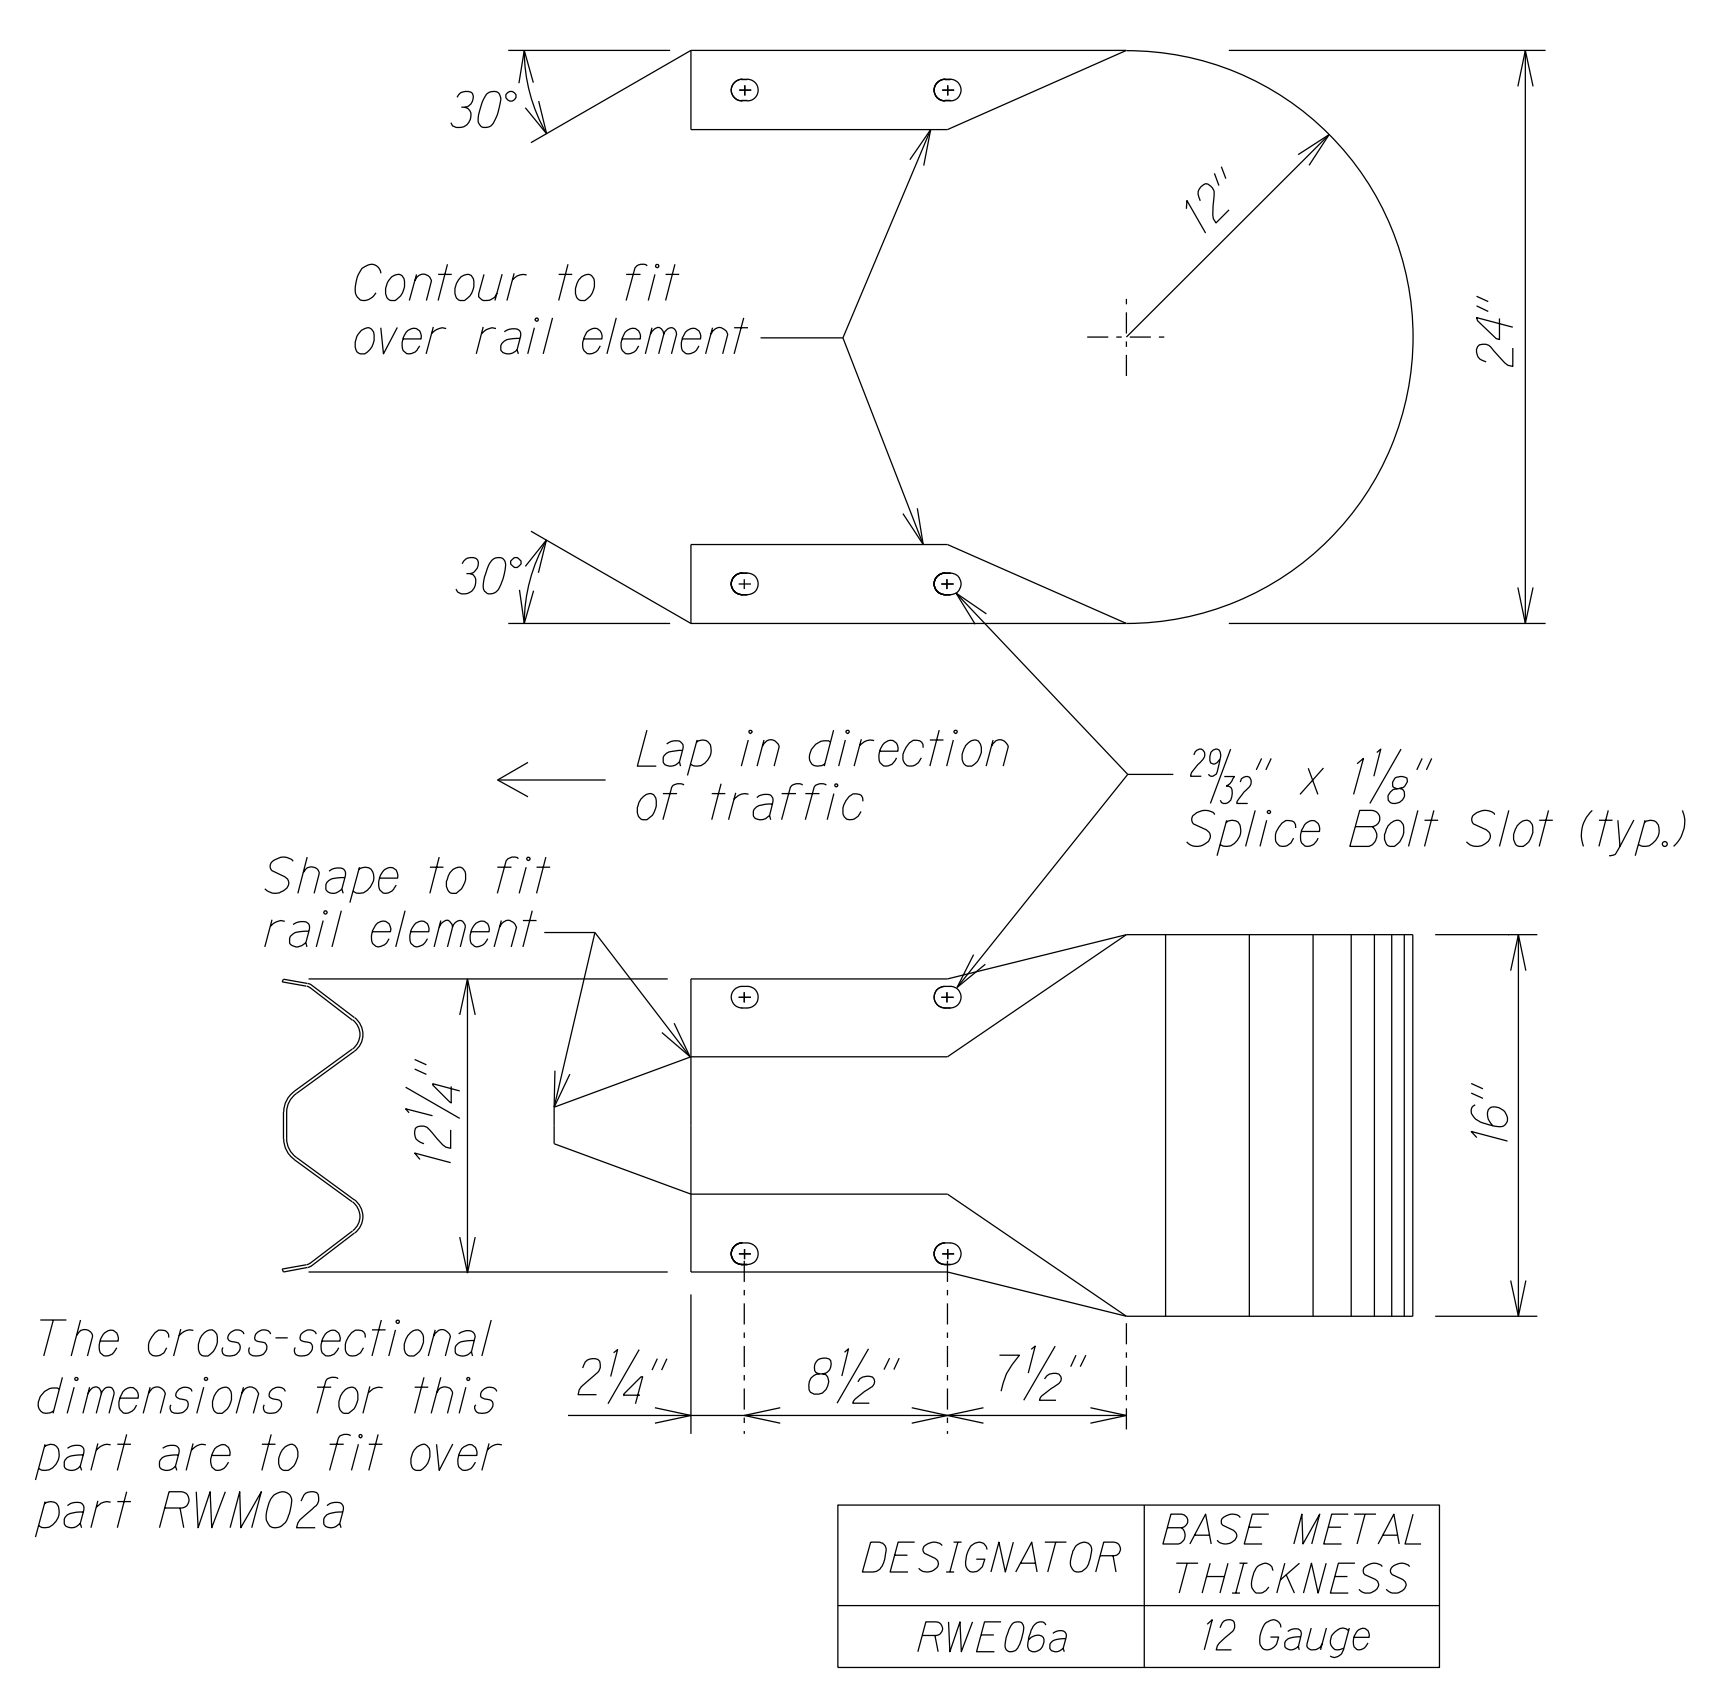

W-BEAM END SECTION (BUFFER RWE06a)

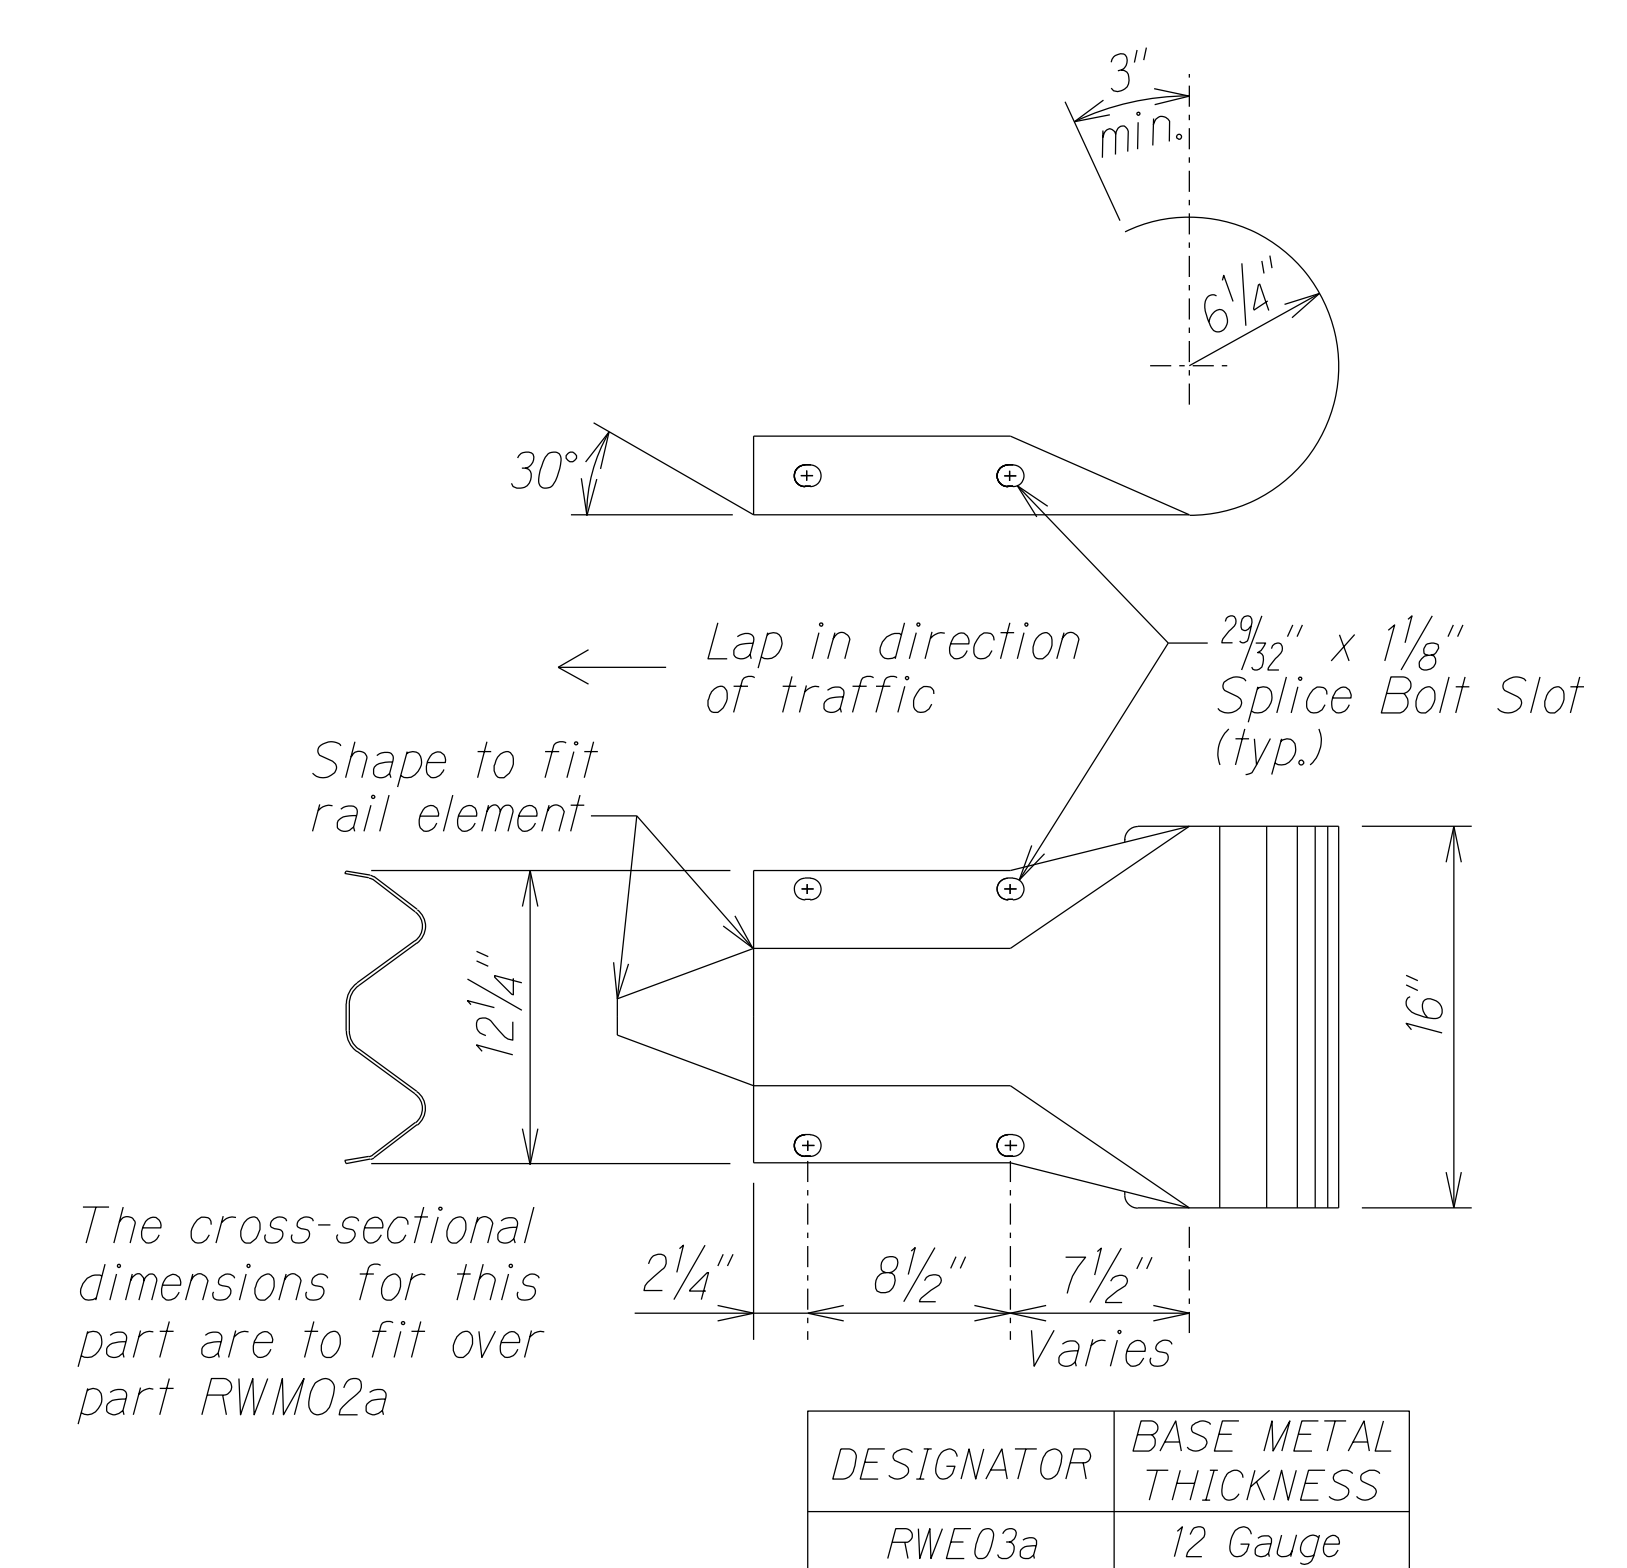

W-BEAM END SECTION (ROUNDED RWE03a)

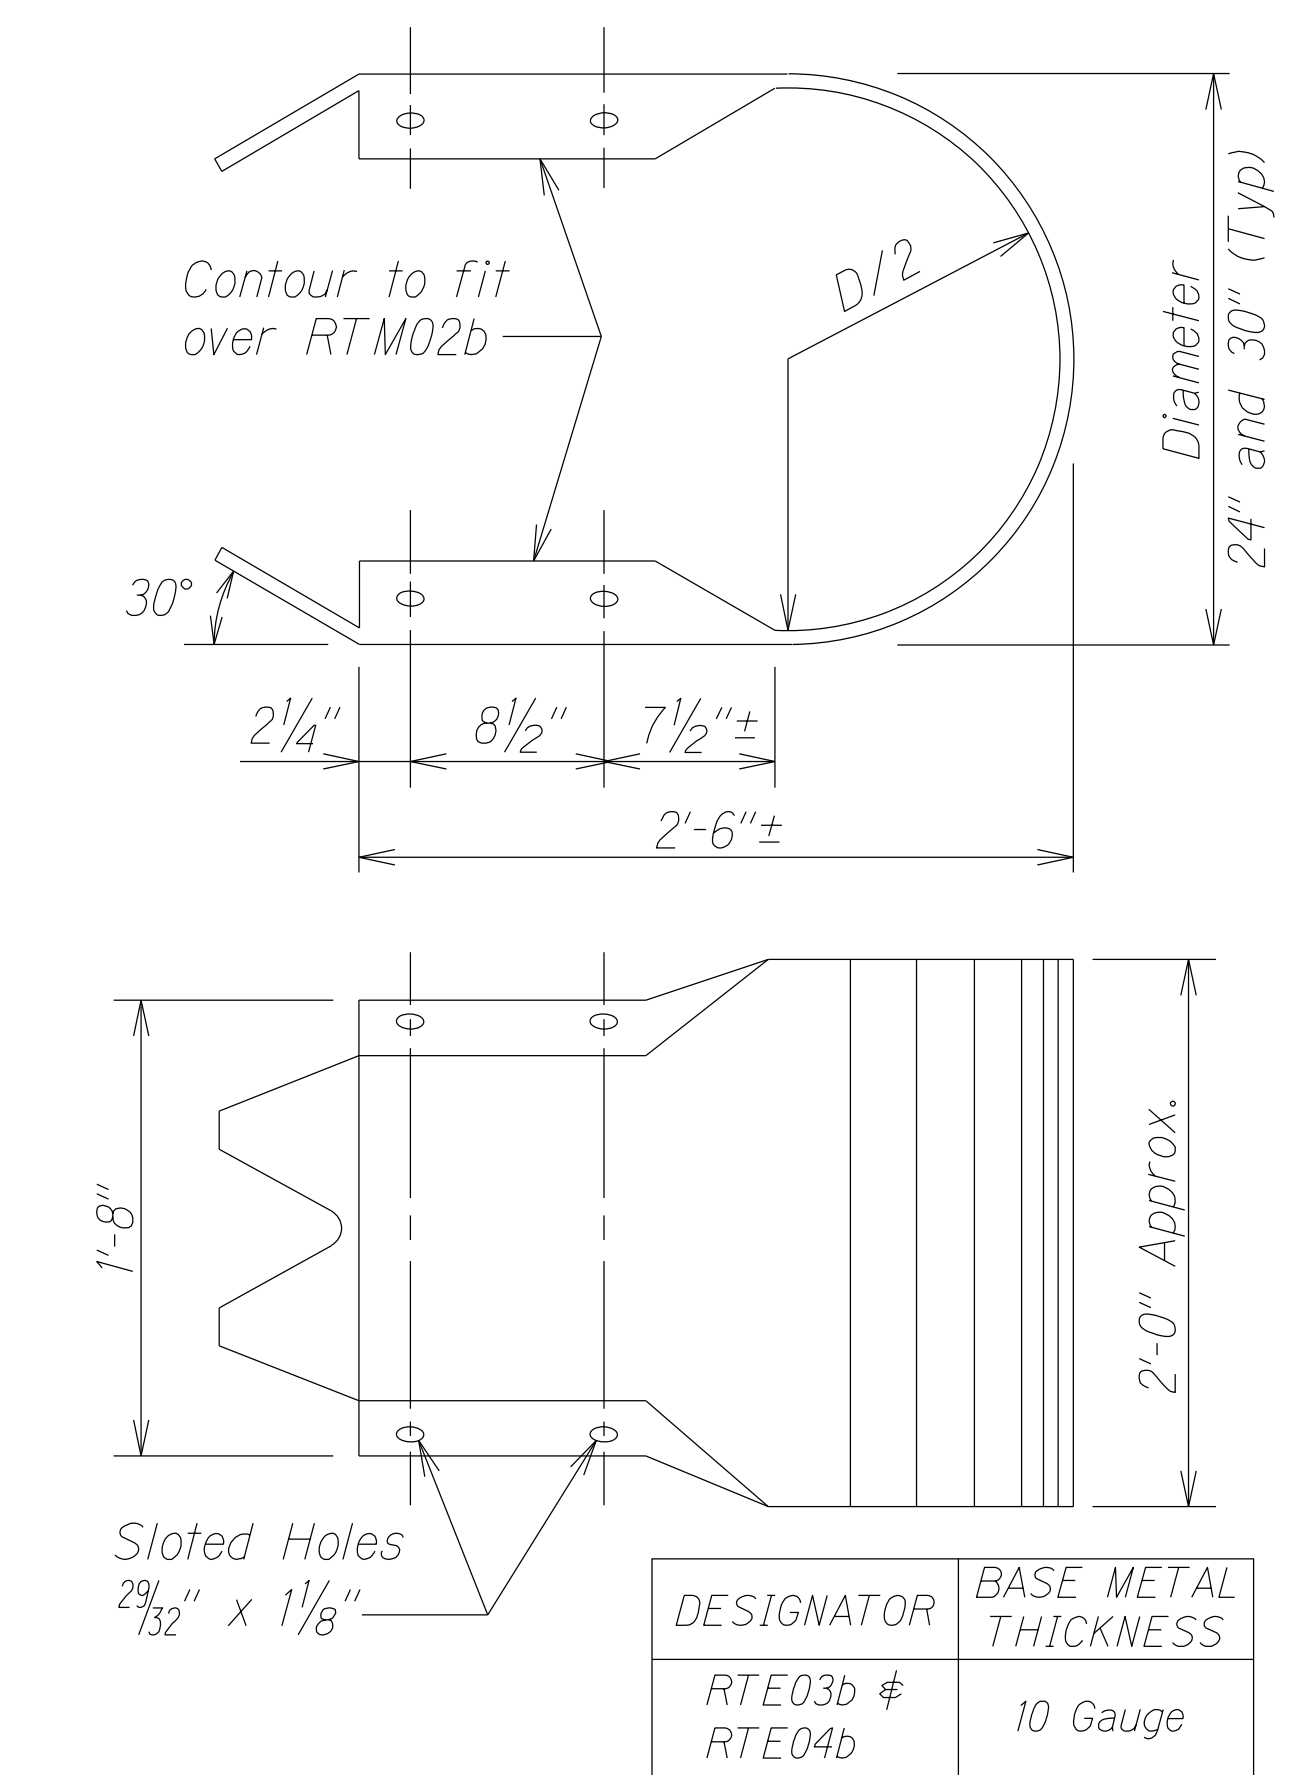

THRIE-BEAM END SECTION (BUFFER RTE03b or RTE04b)

DATE	_____
SURVEY PLOTTED BY	_____
DRAWN BY	_____
DESIGNED BY	_____
NOTE BOOK REFERENCE	_____
QUANTITIES BY	_____
CHECKED BY	_____

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION



**GUARDRAIL TERMINAL CONNECTORS
AND END SECTIONS**

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Laoho Road and Kuli Road
Project No. 50C-01-18

Scale: Not to scale Date: January 2022

SHEET No. 4 OF 5 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	15	30

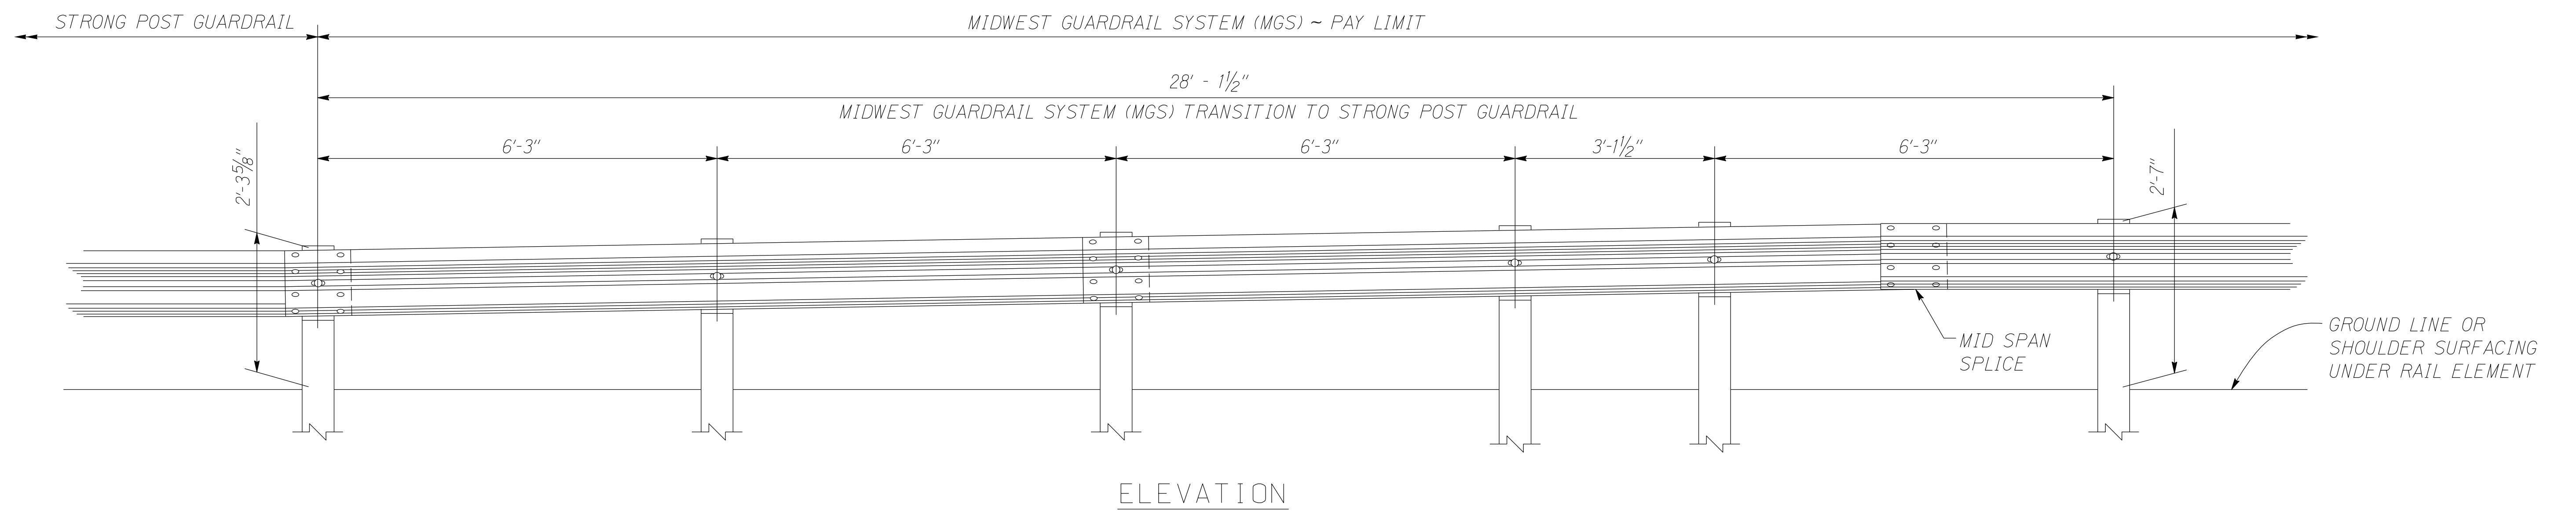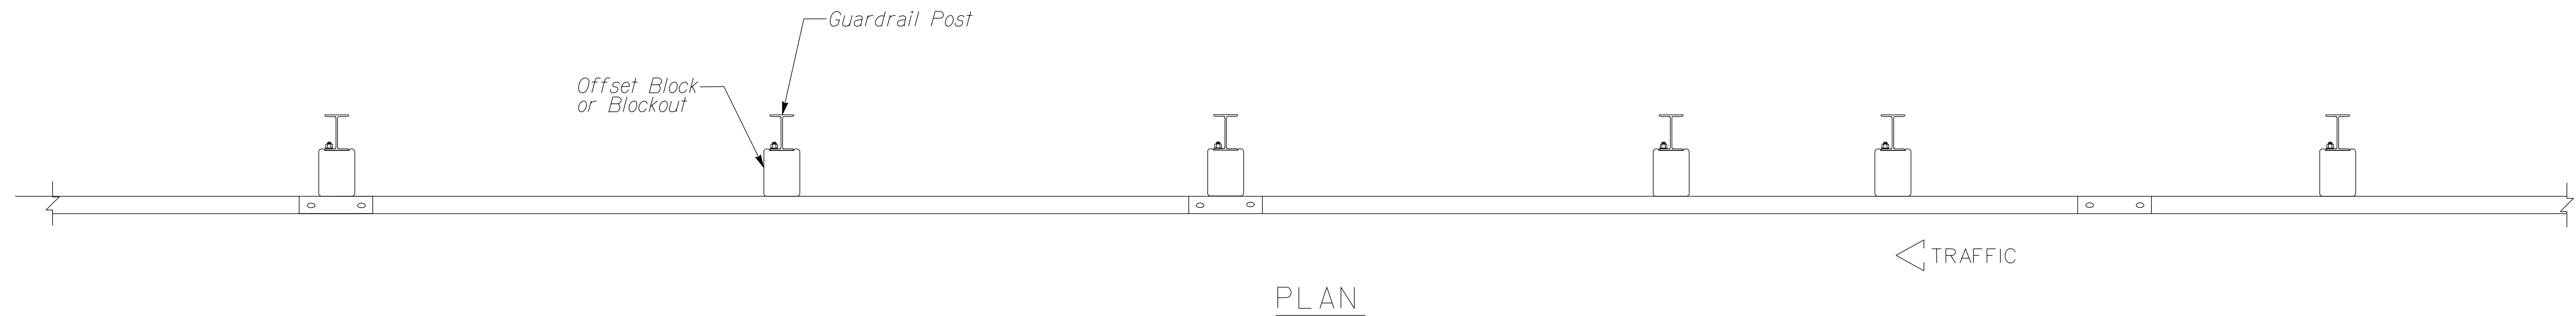

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
QUANTITIES BY	DESIGNED BY	
CHECKED BY	QUANTITIES BY	
	CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

MGS TRANSITION TO STRONG POST GUARDRAIL

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18



Scale: Not to scale Date: January 2022

SHEET No. 5 OF 5 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	16	30

Notes for GRS:

1. Agg. Base Course shall contain 10% to 15% fines.
2. Hollow tiles shall be constructed to create a staggered vertical joints.
3. The contractor shall furnish and install hollow tile, woven geotextile, reinforcement bar and grout. This work shall be considered incidental to Item No. 304.0110 - Aggregate Base and will not be paid separately.

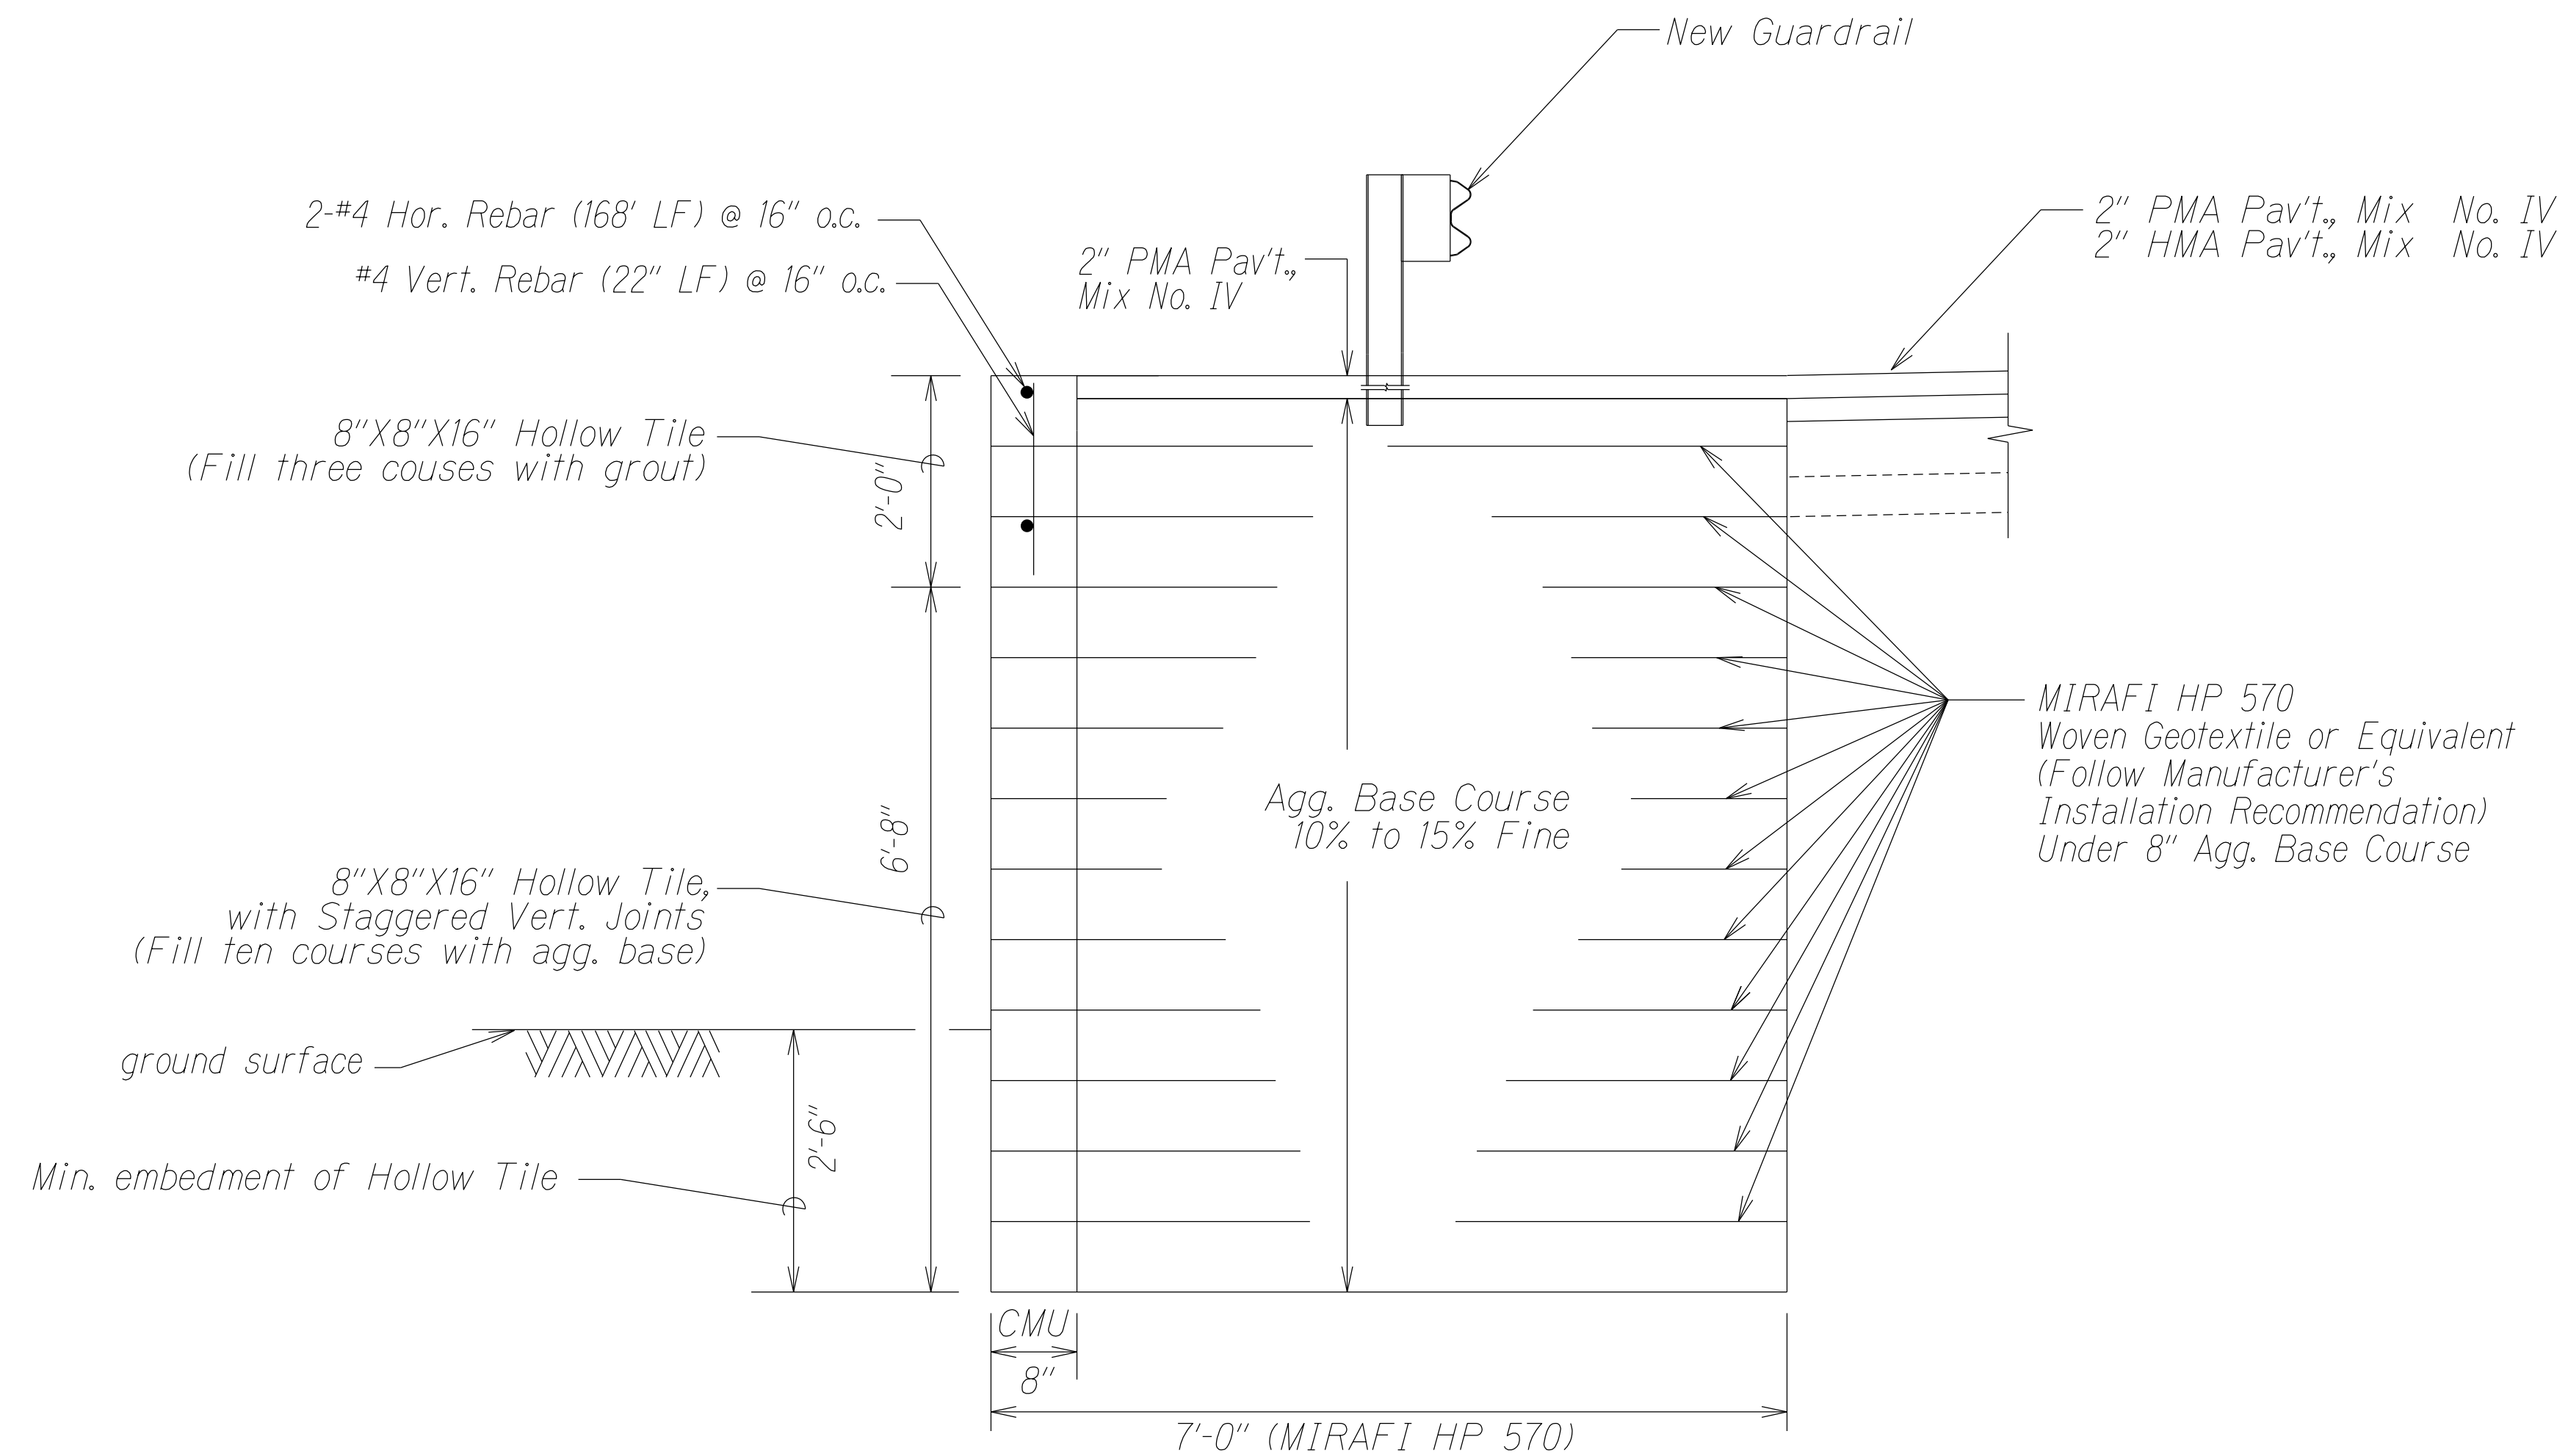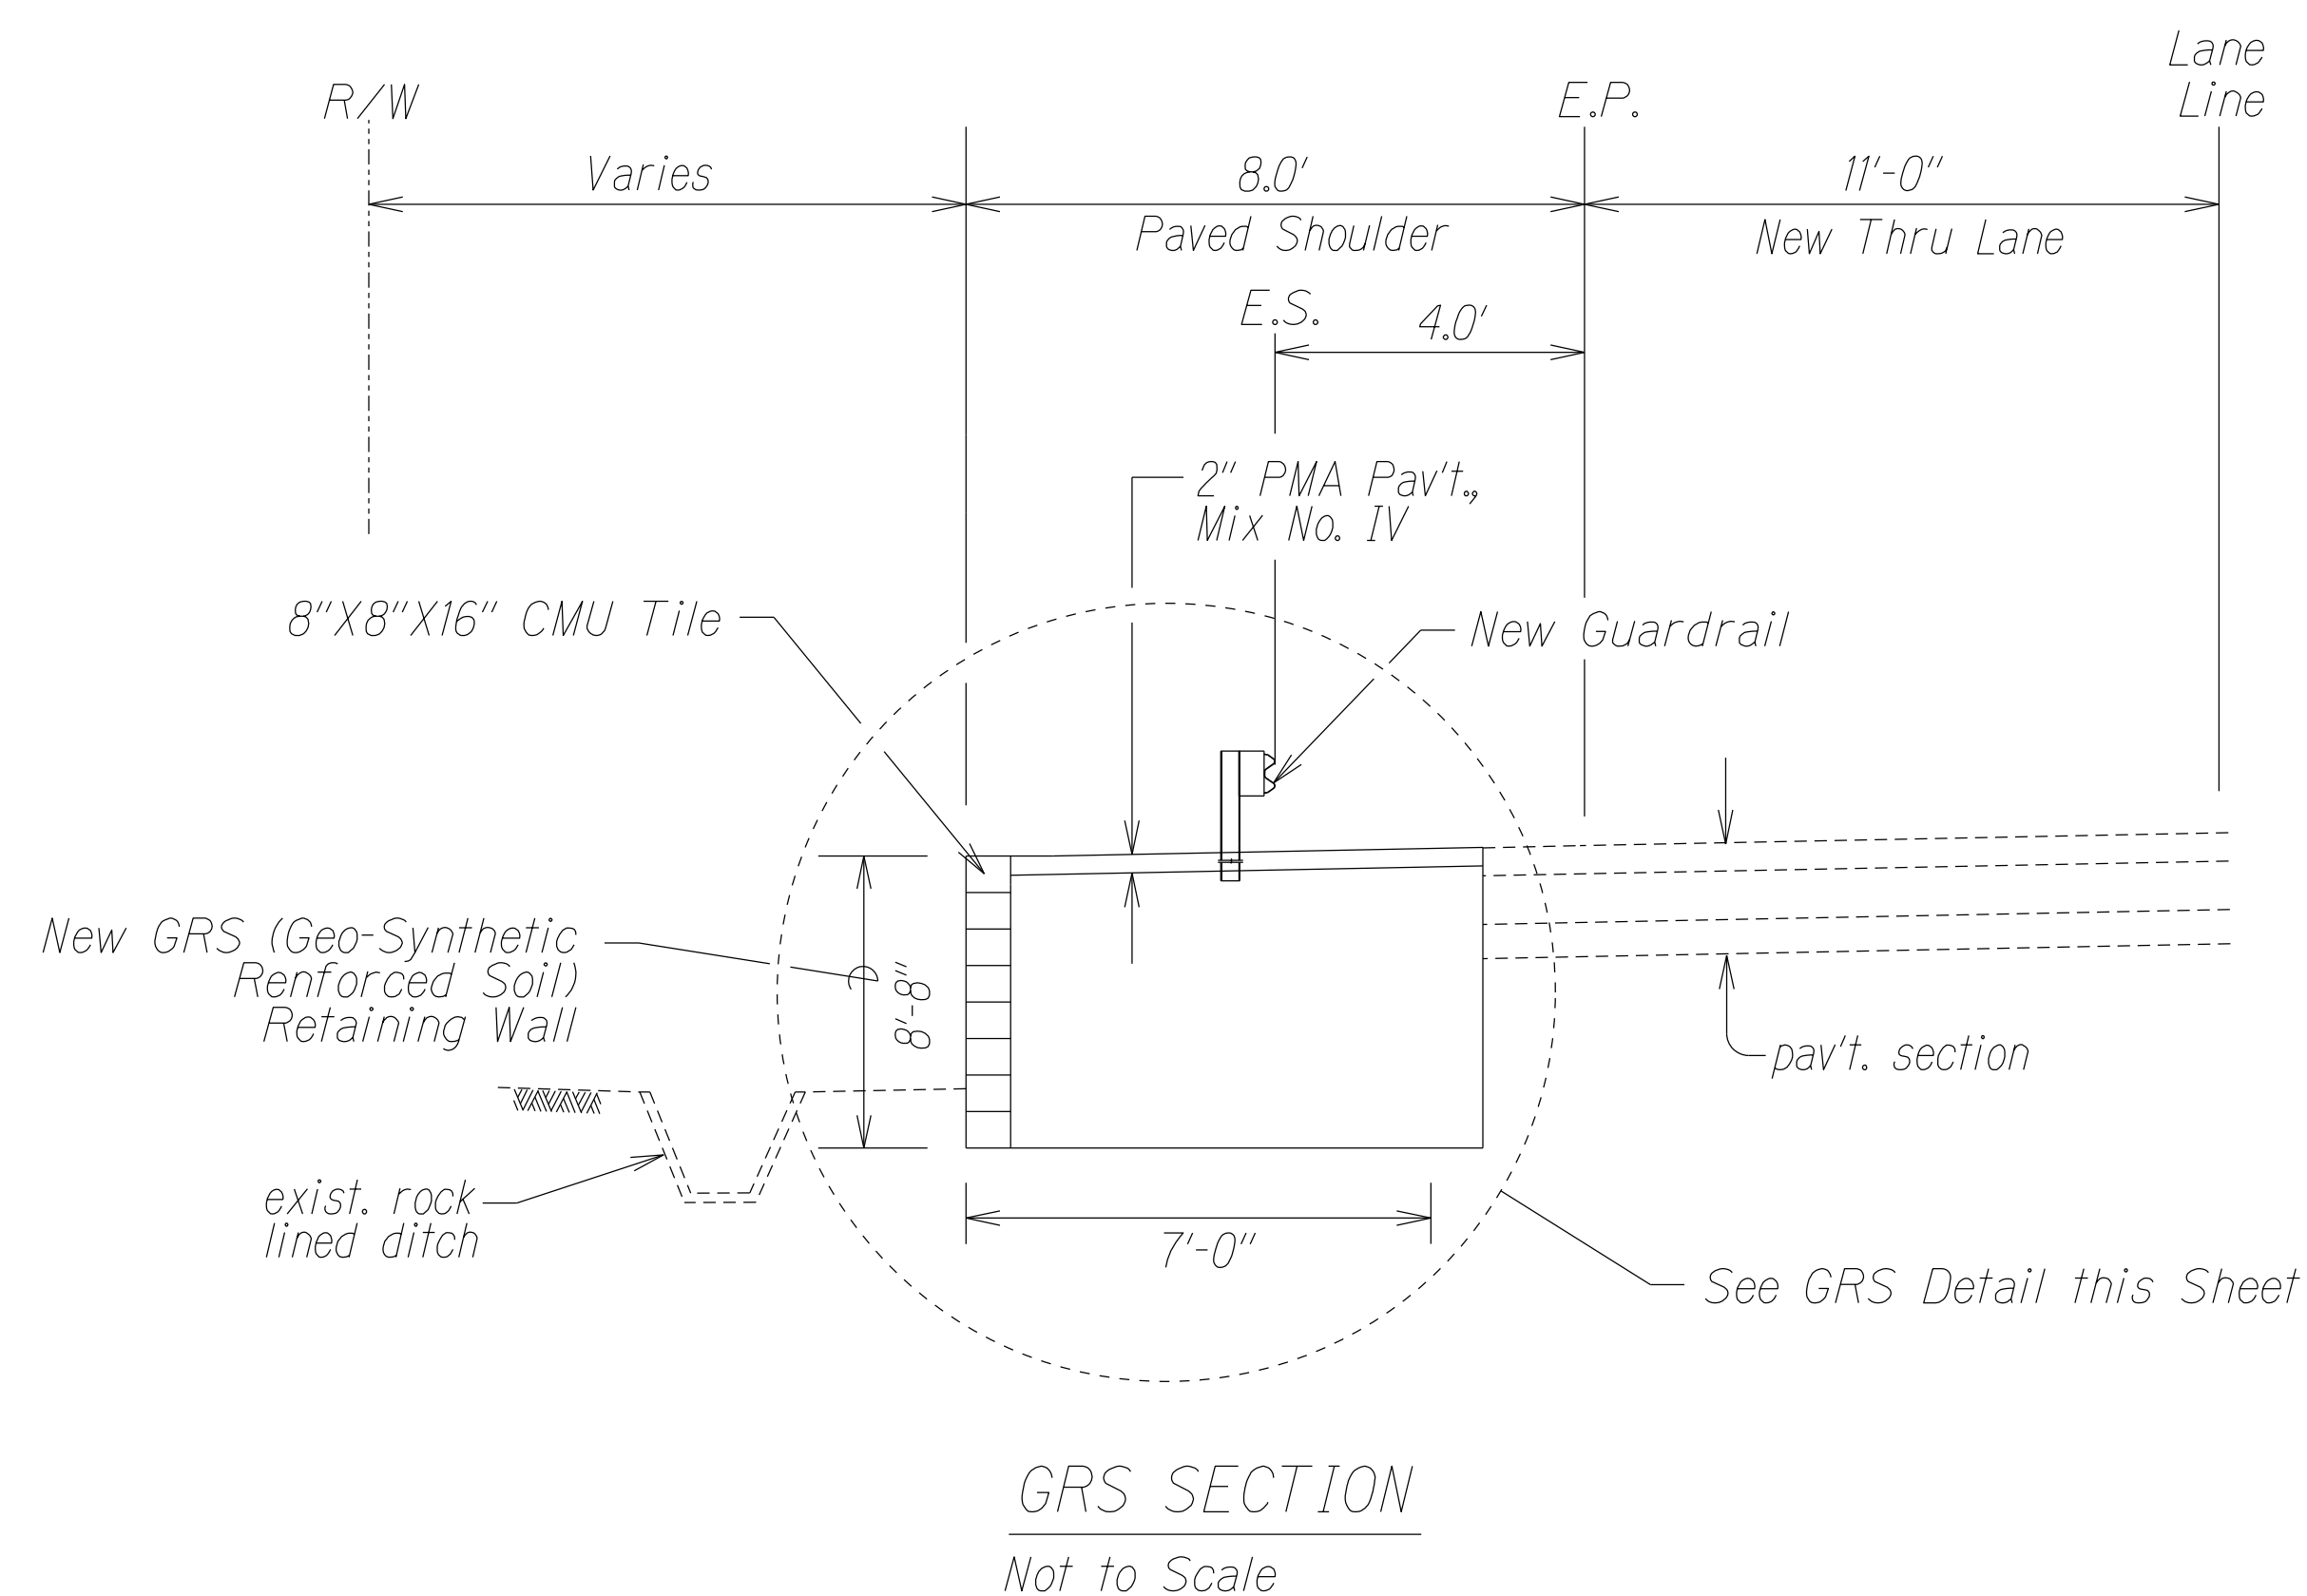

(GRS) RETAINING WALL NO. 1 USING CMU HOLLOW TILE
Not to Scale

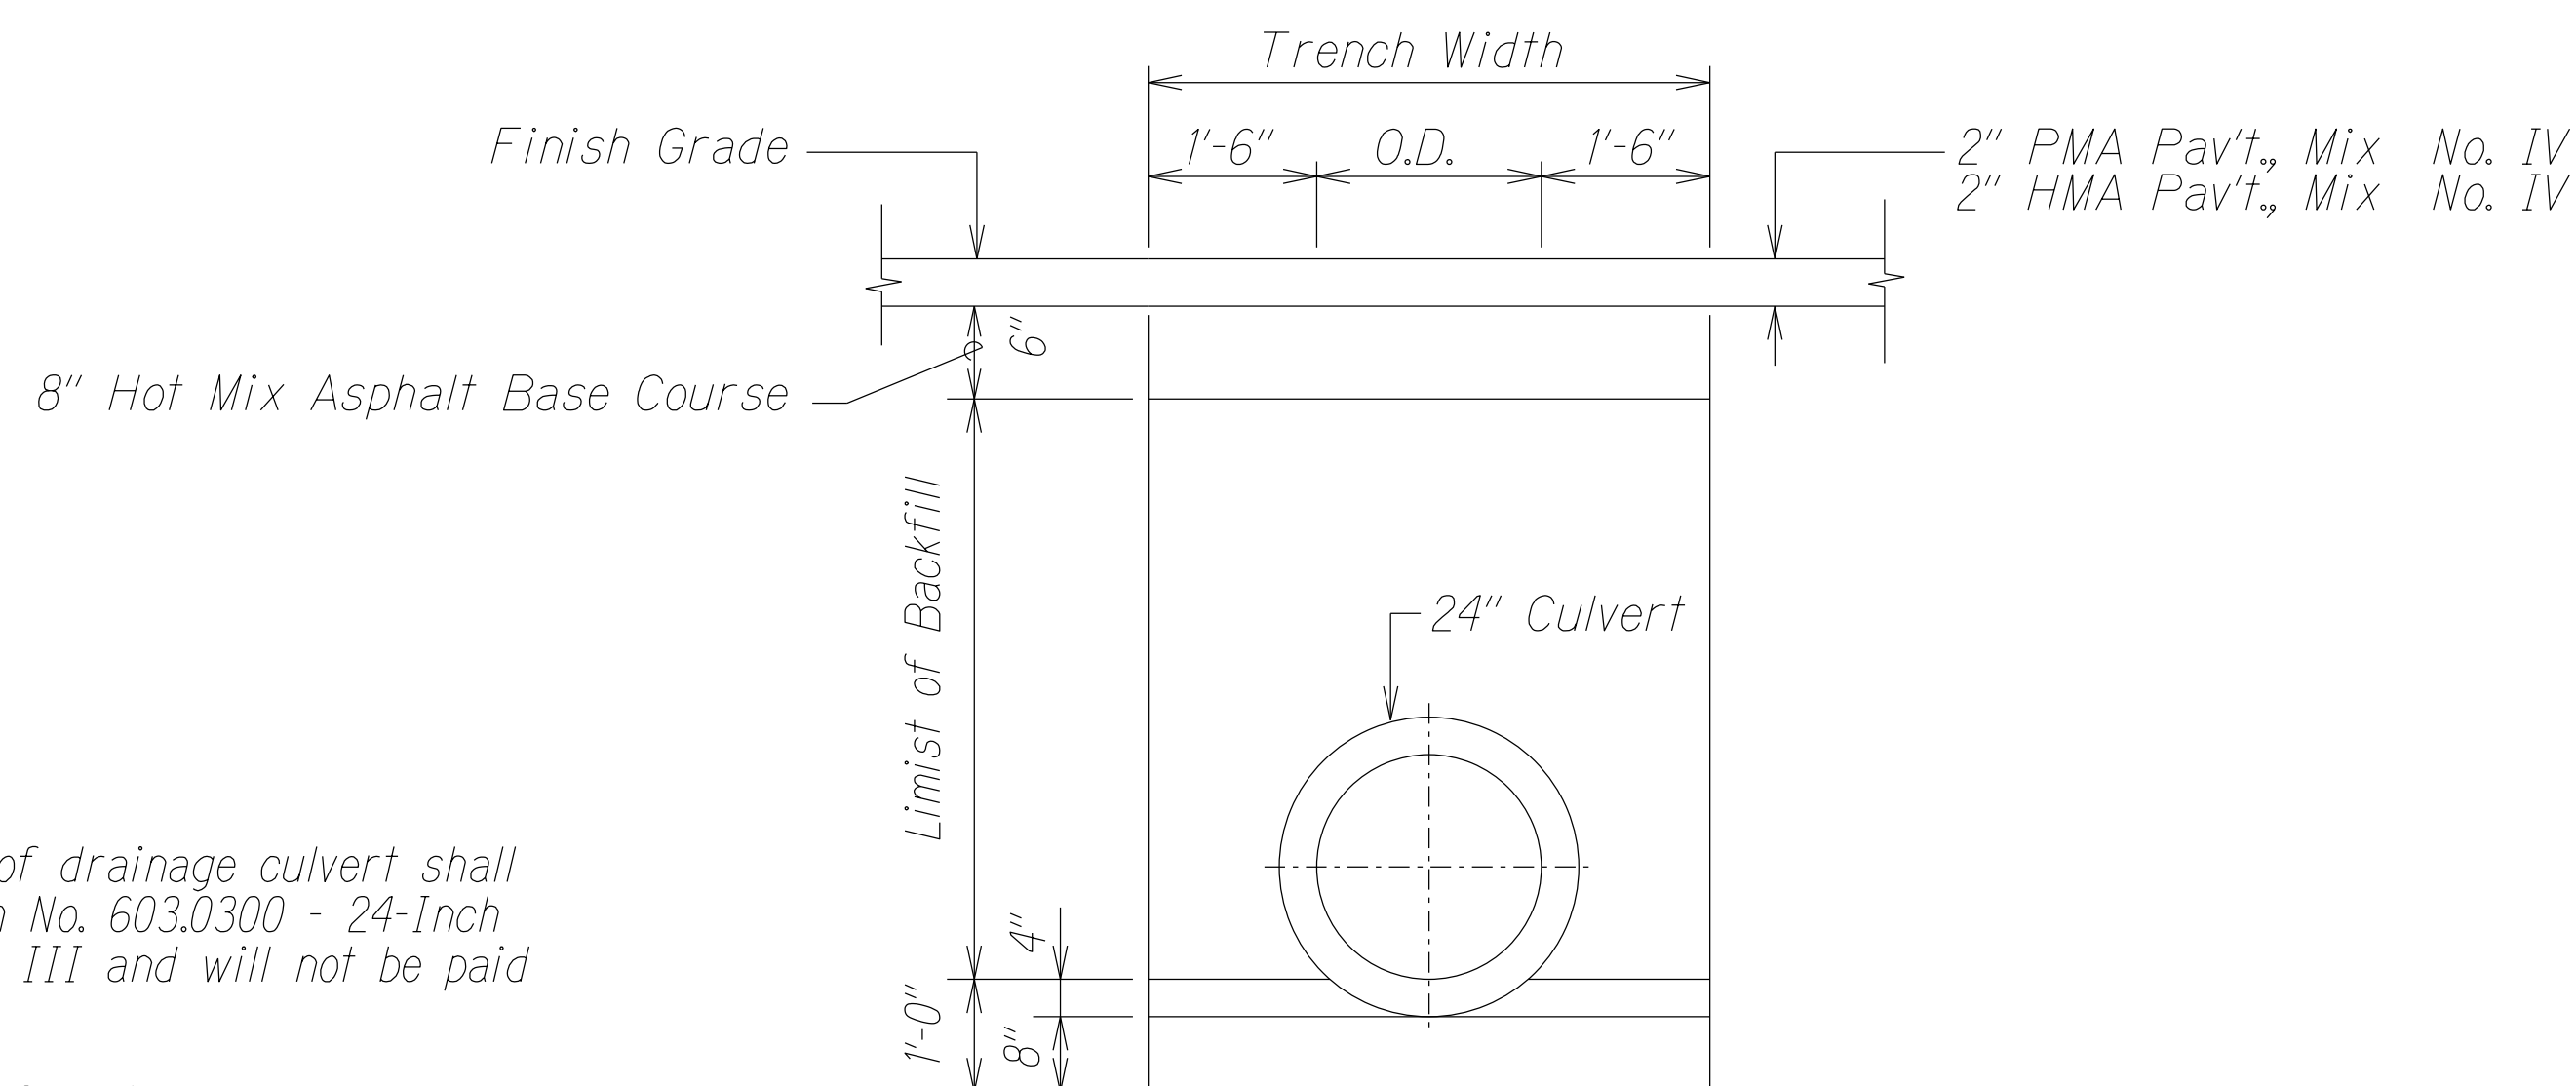

Notes for Pipe Culvert:

1. Trench excavation and backfill of drainage culvert shall be considered incidental to Item No. 603.0300 - 24-Inch Reinforced Concrete Pipe, Class III and will not be paid separately.
2. Trench excavation and backfill of drainage culvert shall be in accordance with Section 206 - Excavation and Backfill for Drainage Facilities.

SURVEY PLOTTED BY	DATE
DRAWN BY	2/22
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
DATE	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


MISCELLANEOUS DETAILS

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18


Scale: Not to Scale Date: January 2022

SHEET No. 1 OF 2 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	17	30

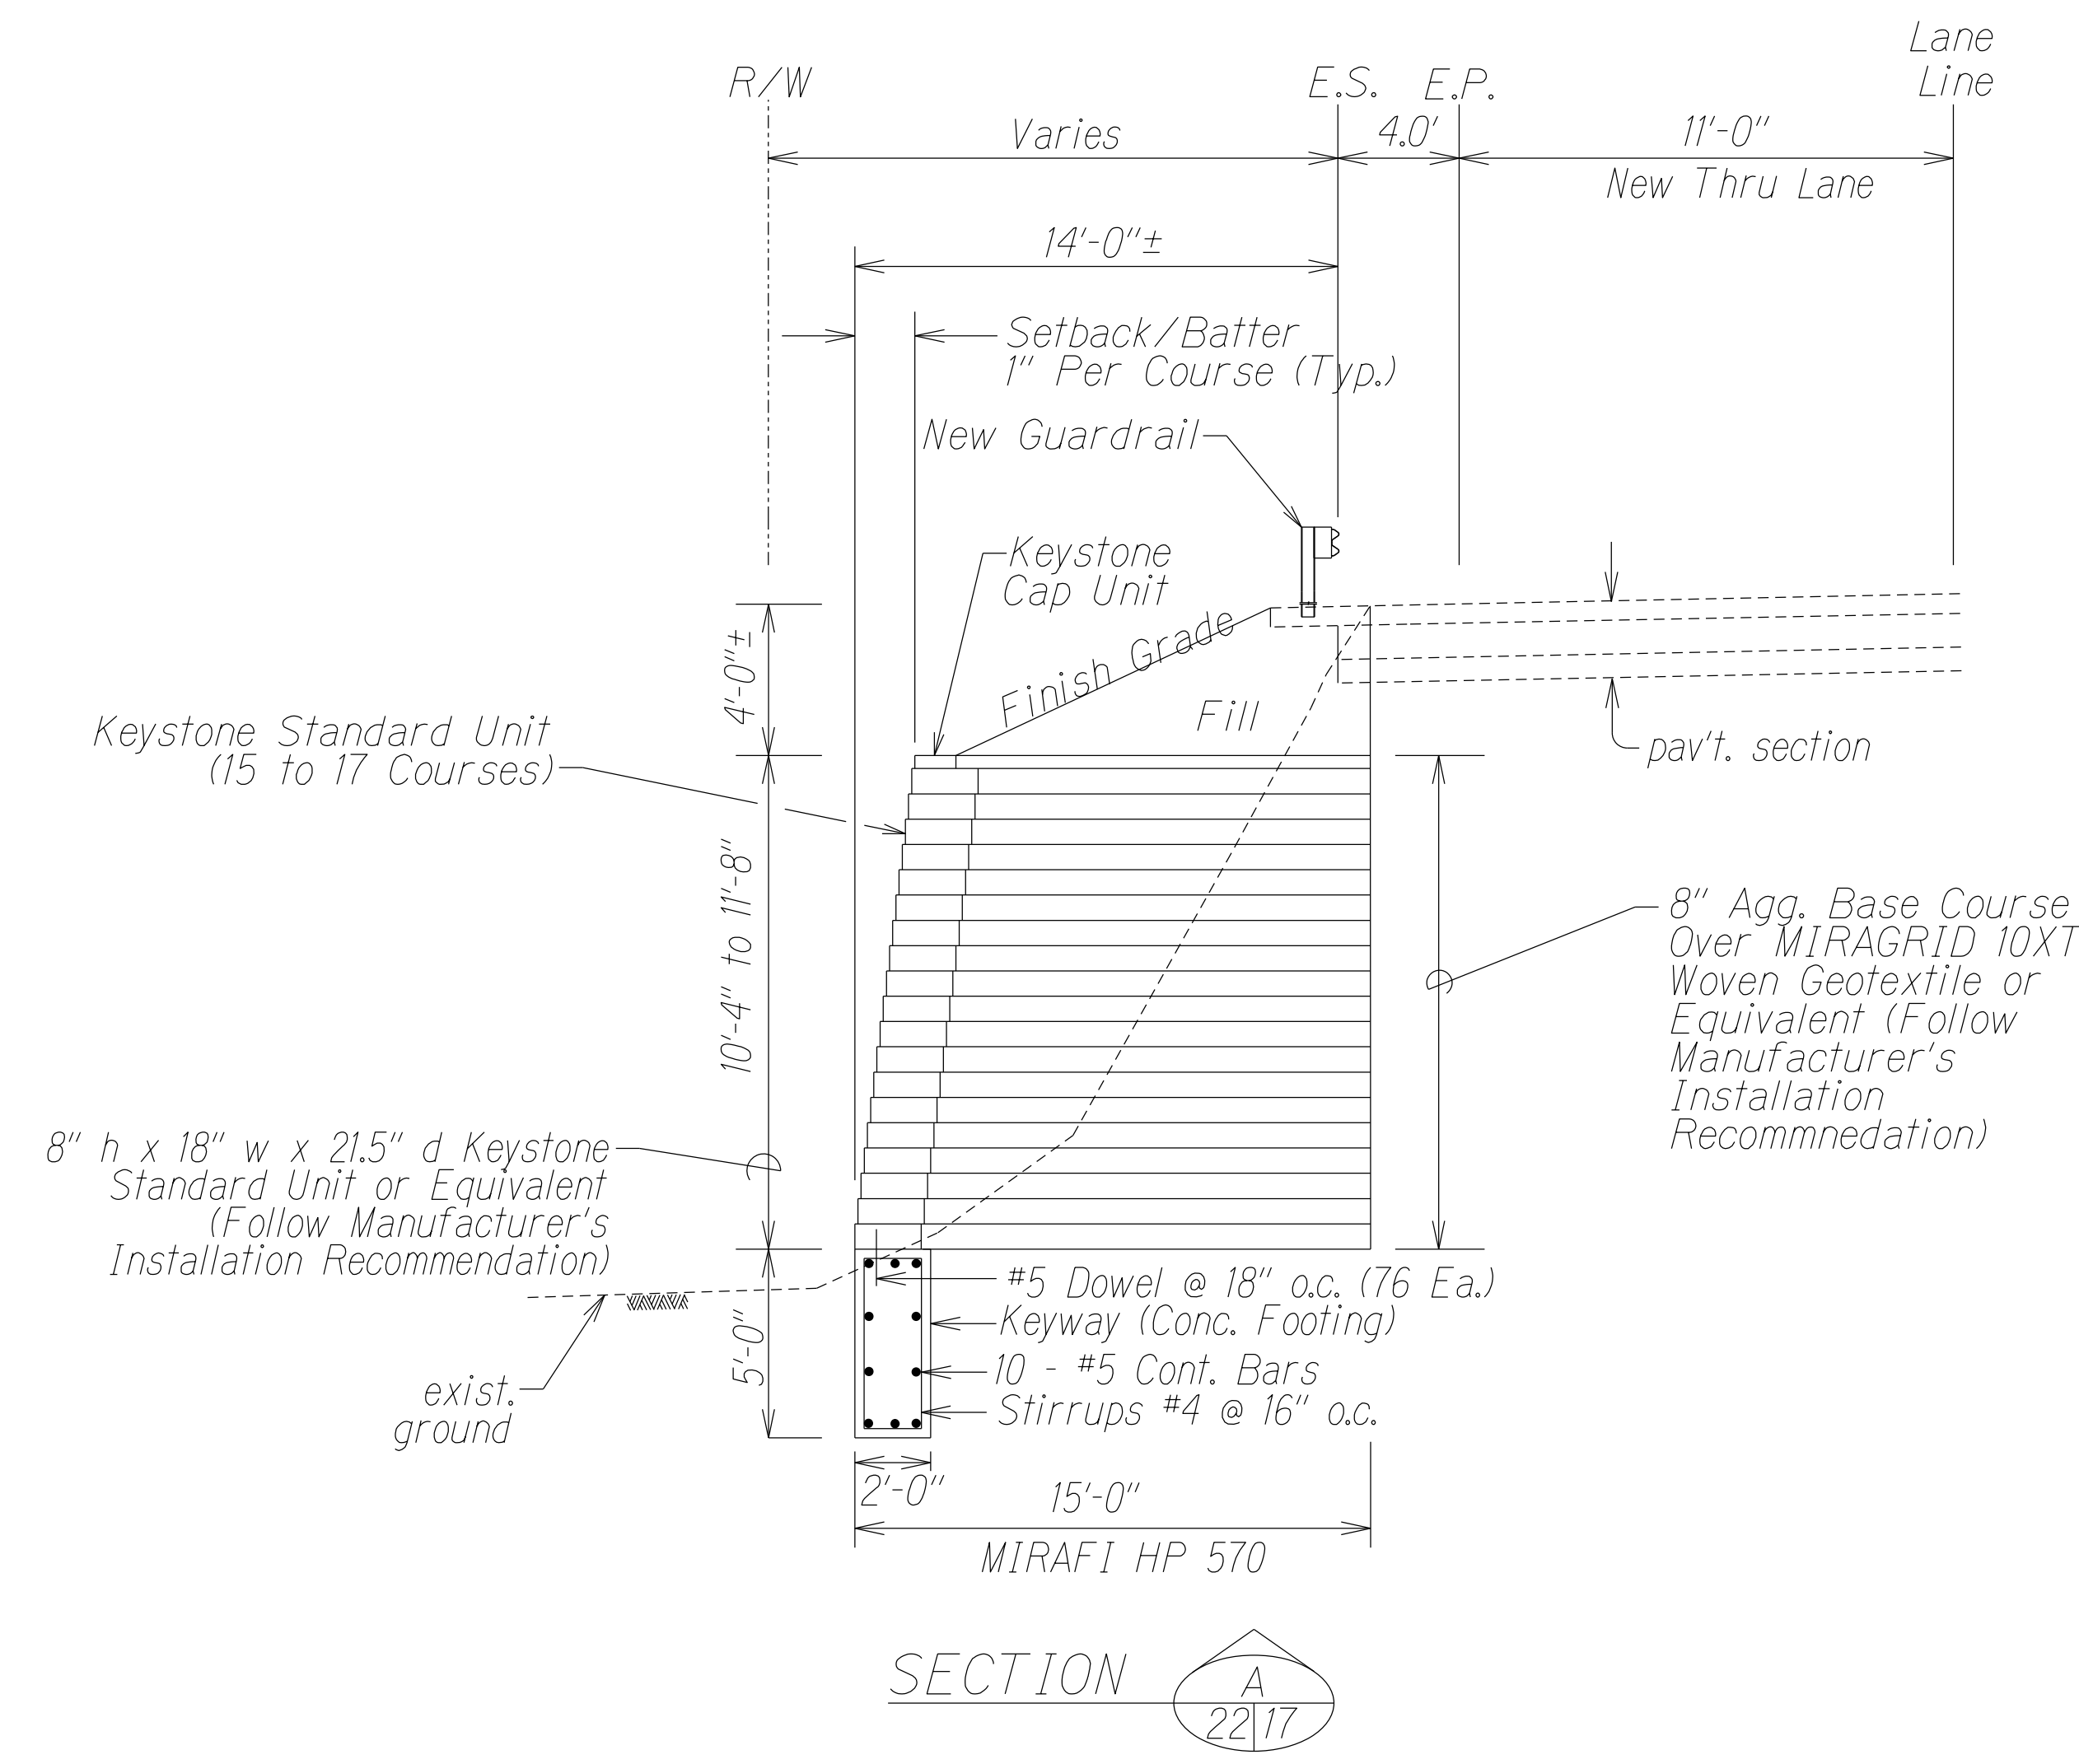

(GRS) RETAINING WALL NO. 2 USING KEYSTONE STANDARD UNIT
Not to Scale

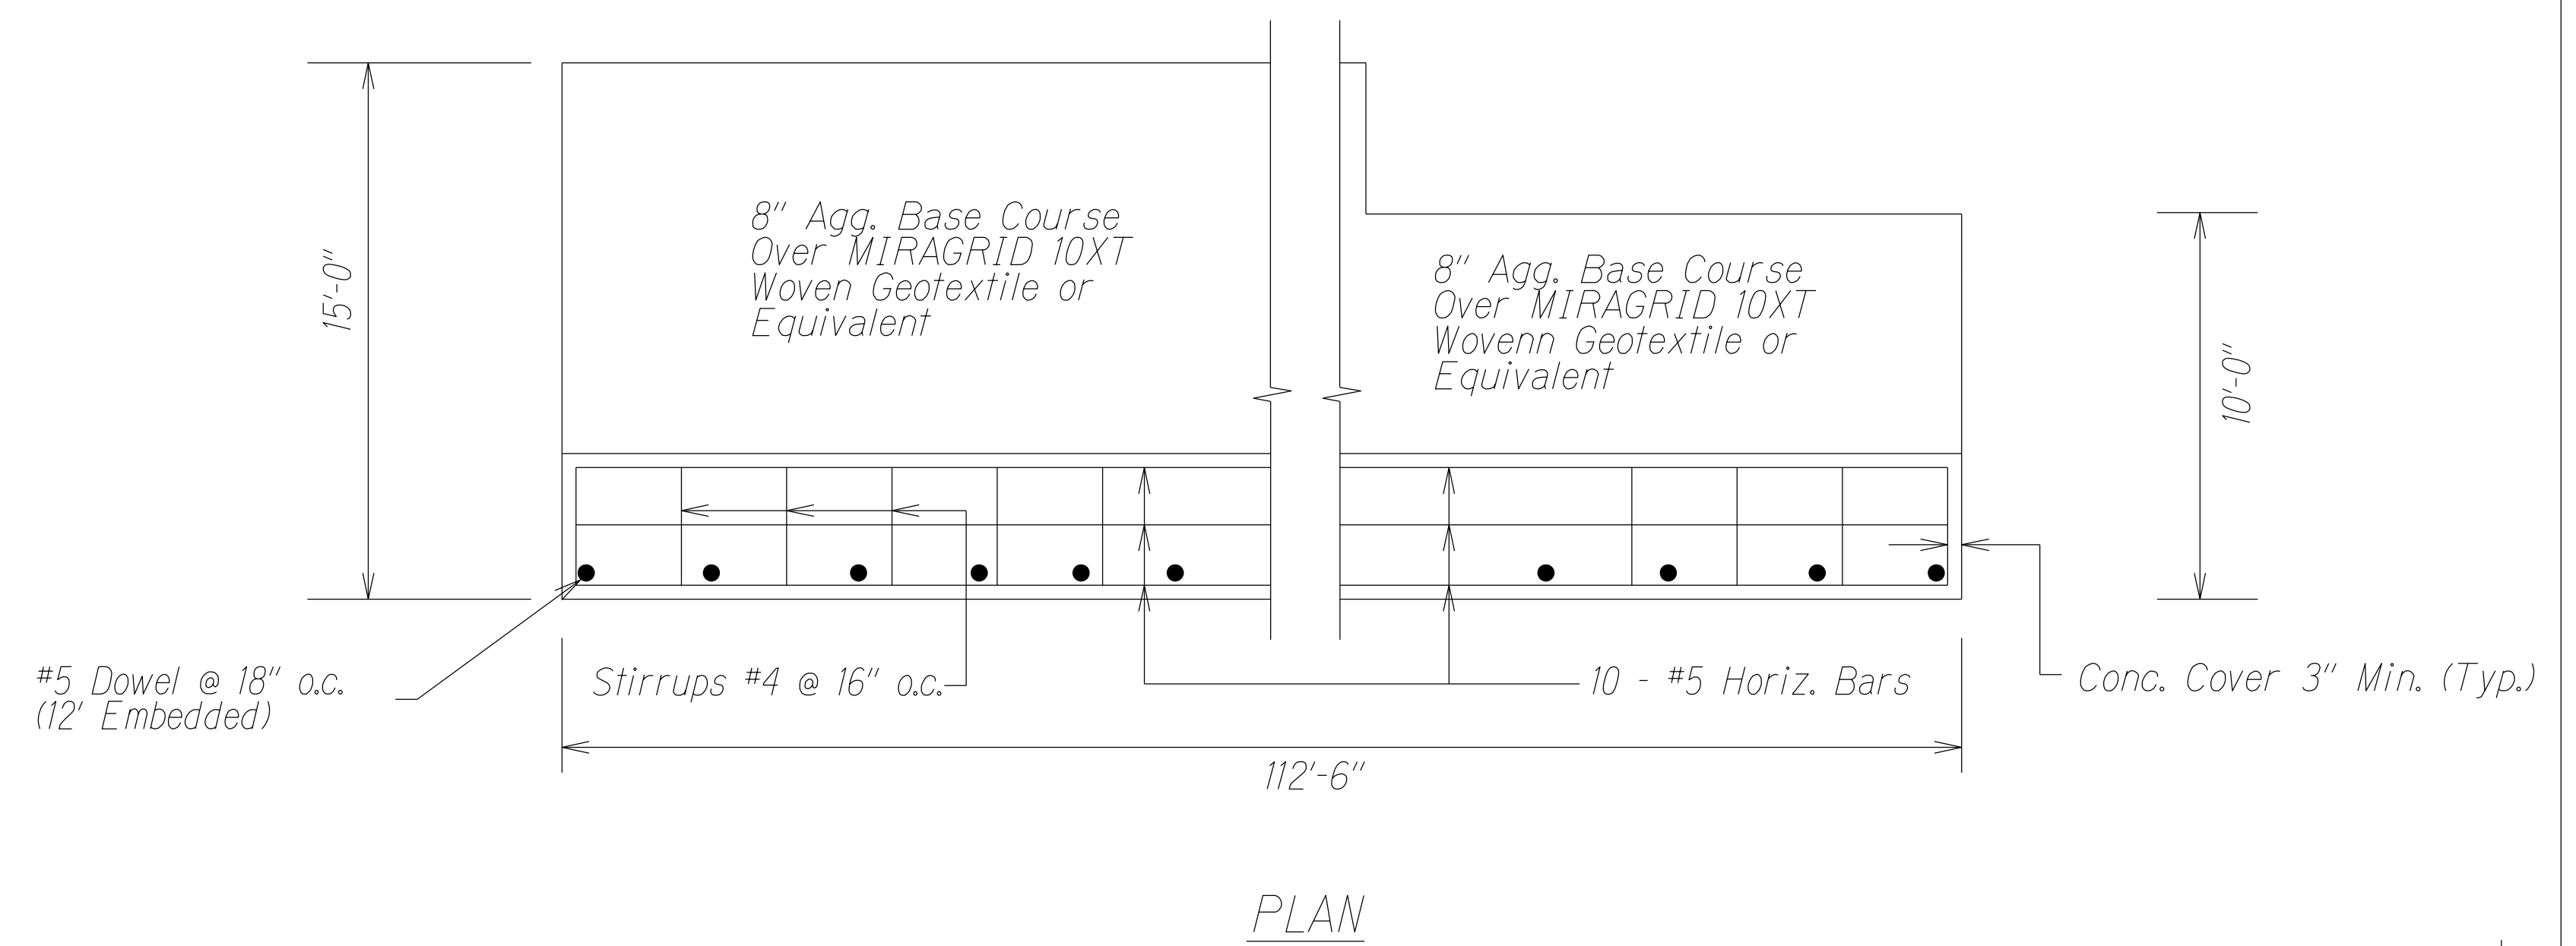

PLAN

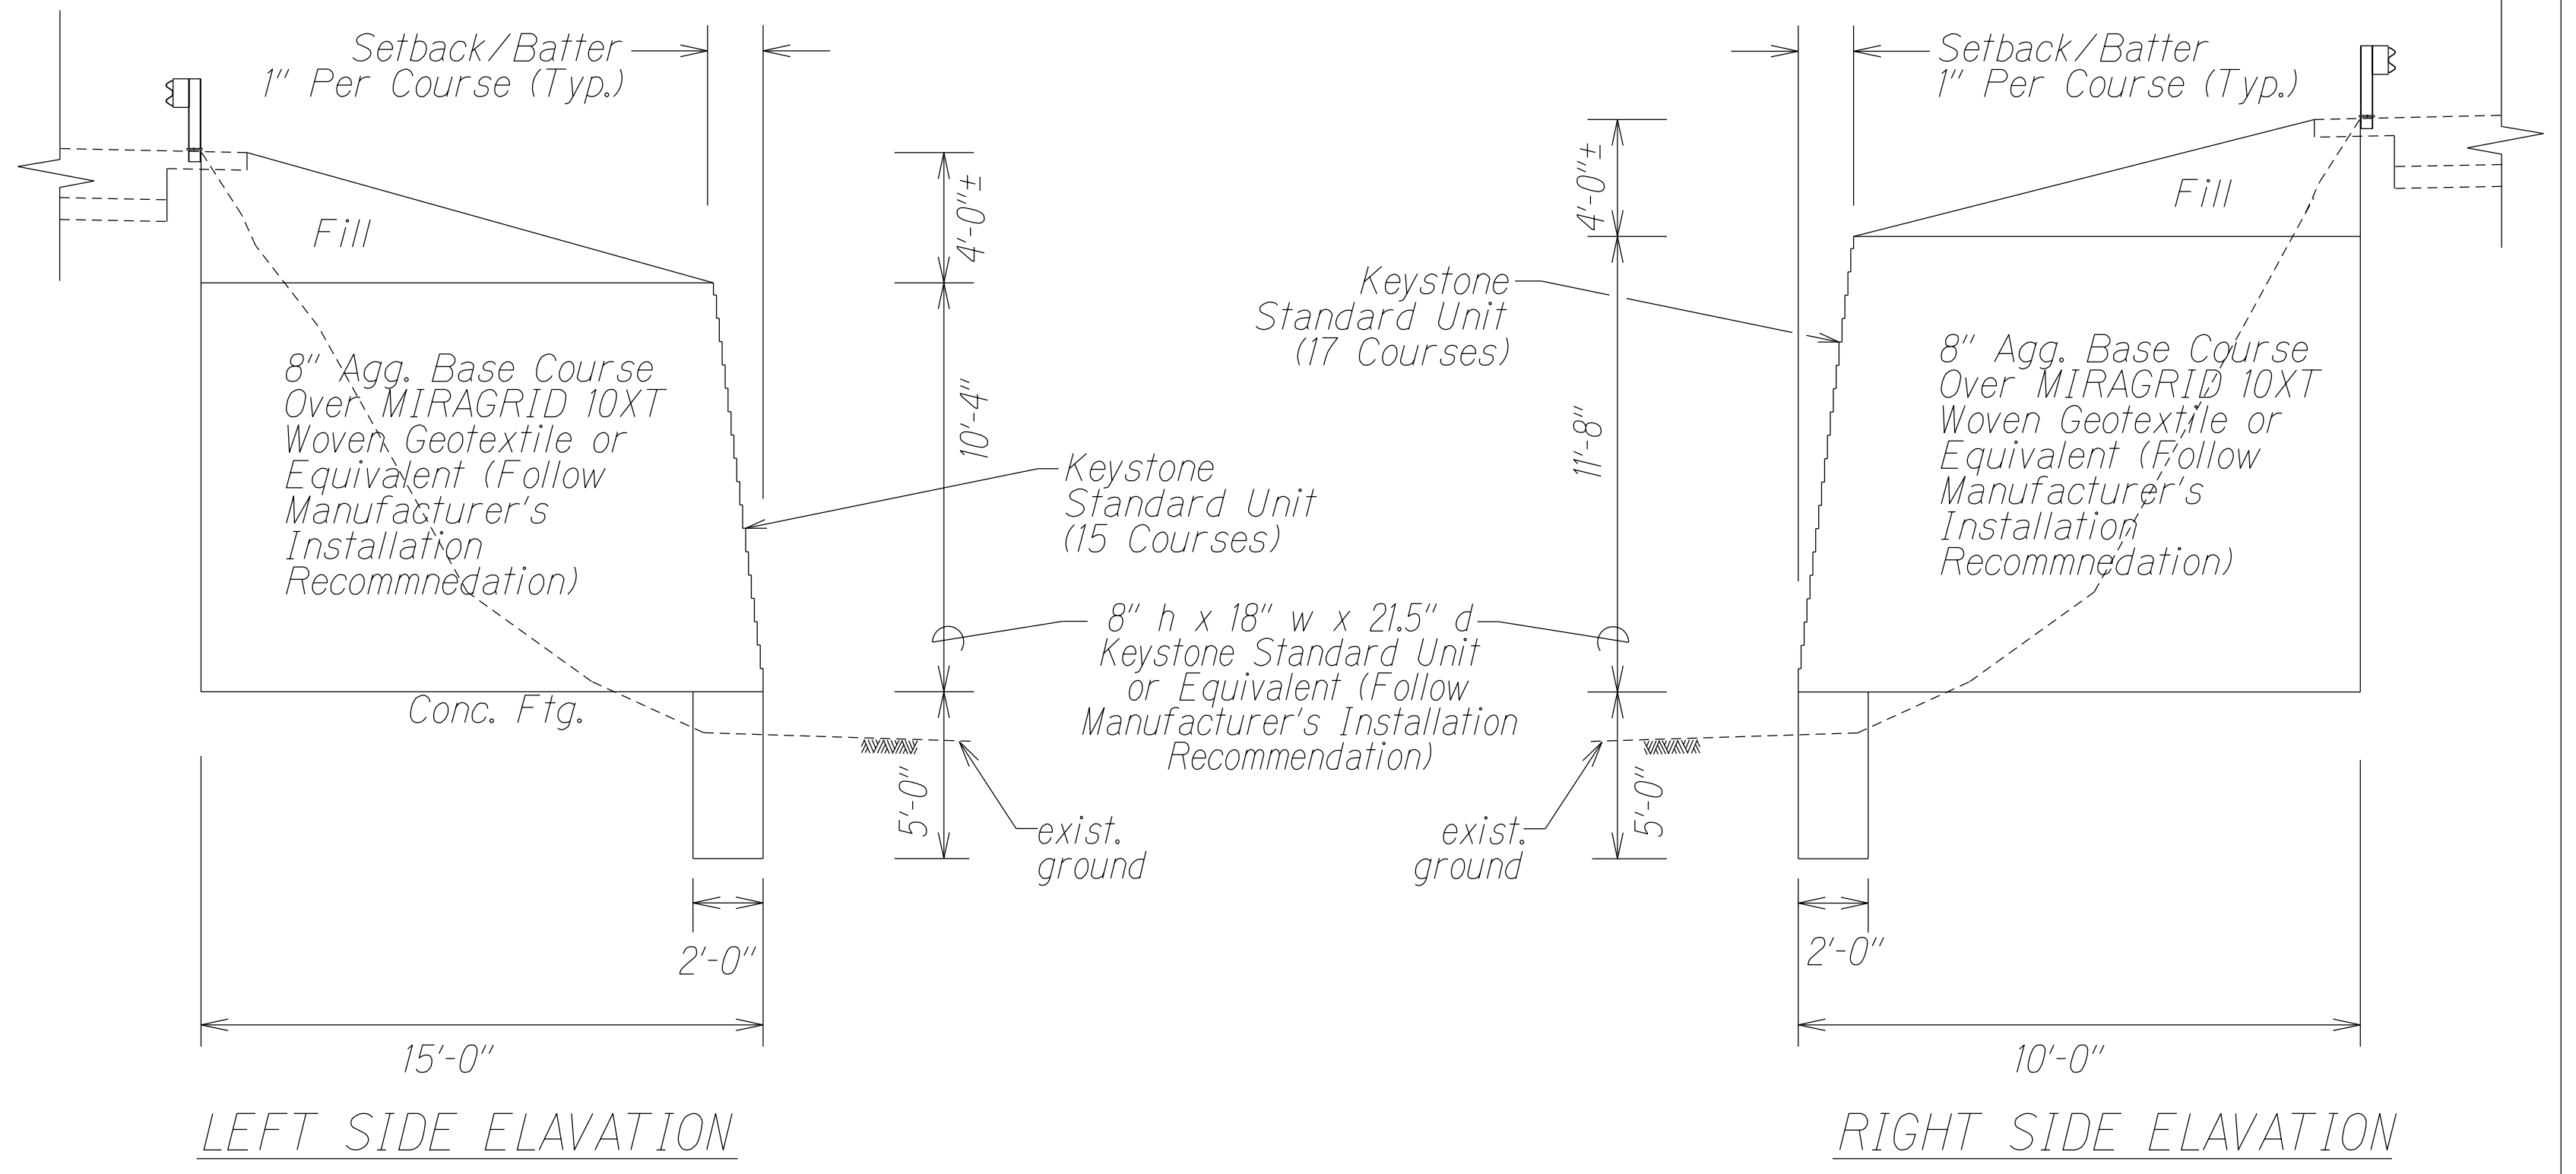

LEFT SIDE ELAVATION

CONCRETE FOOTING
Not to Scale

RIGHT SIDE ELAVATION

- Notes:
1. Agg. Base Course shall contain 10% to 15% fines.
 2. Keystone Standard Units shall be constructed to create a staggered vertical joints.
 3. The contractor shall furnish and install Keystone Standard Units, and woven geotextile fabric. This work shall be considered incidental to Item No. 304.0120 - Aggregate Base and will not be paid separately.
 4. See Standard Plans B-01 for additional notes.

SURVEY PLOTTED BY	DATE
DRAWN BY	2/2022
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
DATE	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


MISCELLANEOUS DETAILS

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: Not to Scale Date: January 2022

SHEET No. 2 OF 2 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	18	30

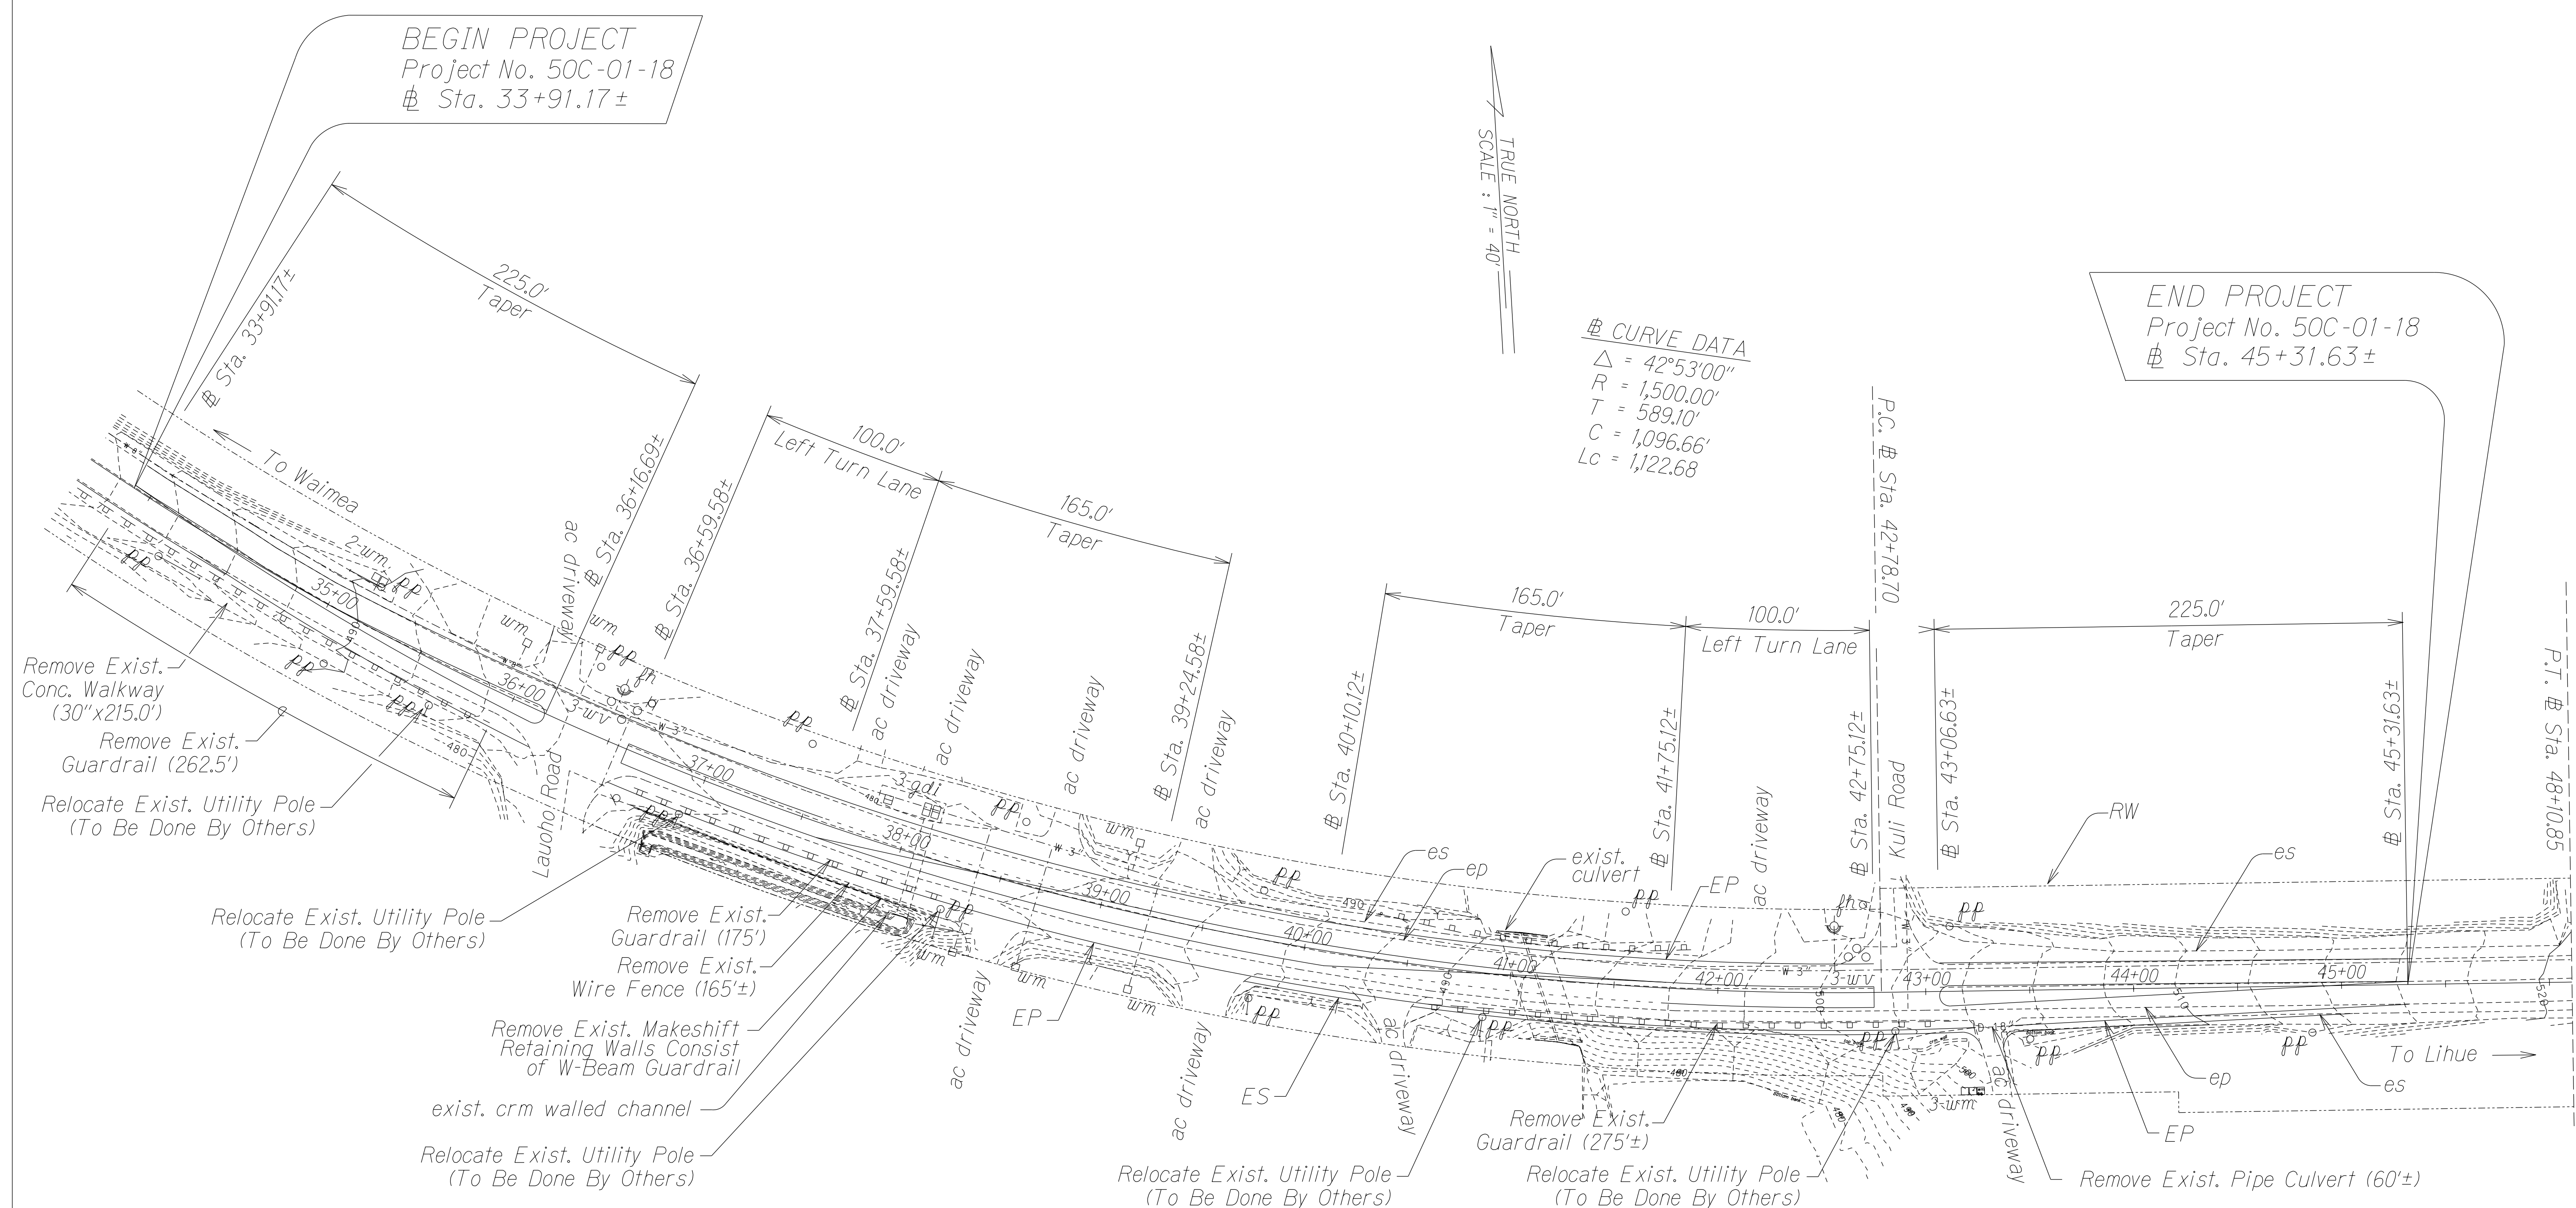

CURVE DATA
 $\Delta = 42^\circ 53' 00''$
 $R = 1,500.00'$
 $T = 589.10'$
 $C = 1,096.66'$
 $Lc = 1,122.68$

ORIGINAL PLAN	DATE
SURVEY PLOTTED BY	
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**GENERAL ROADWAY
IMPROVEMENT LAYOUT**


KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18
Scale: 1" = 40' Date: January 2022

SHEET No. 1 OF 1 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	19	30

TRUE NORTH
SCALE: 1" = 20'


☯ CURVE DATA
 $\Delta = 42^\circ 53' 00''$
 $R = 1,500.00'$
 $T = 589.10'$
 $C = 1,096.66'$
 $Lc = 1,122.68'$

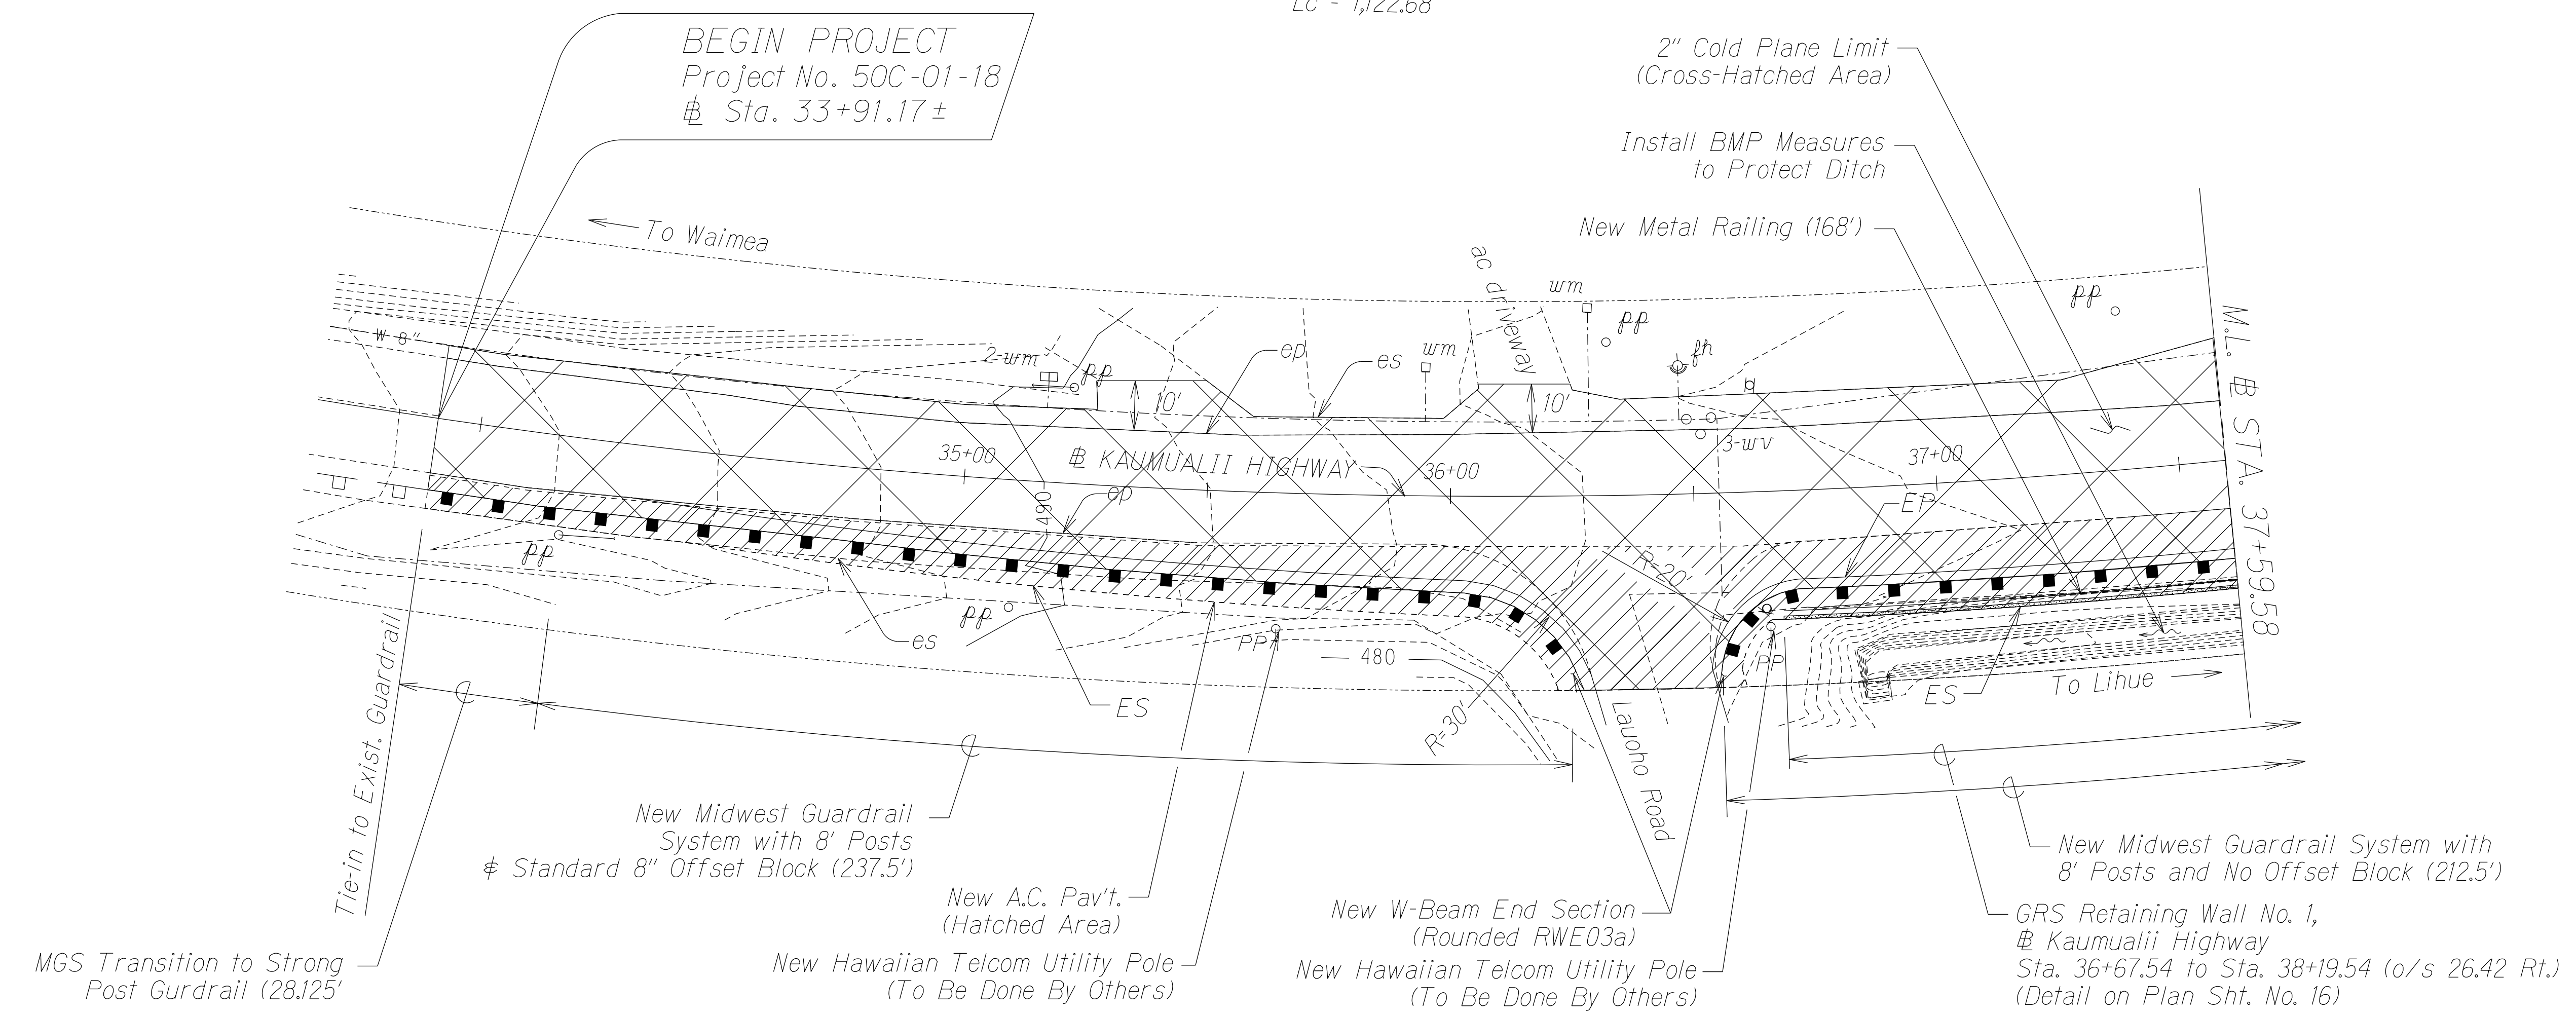

BMP Note:

- Sediment and Erosion Control BMP measures shown in the Contract Documents are minimum BMP's requirements and do not constitute an acceptable and/or complete Sediment Control Plan. The Contractor shall incorporate additional BMP's based upon their means and methods considering site conditions and construction sequence in accordance with the Contract Documents including applicable permit document requirements. Cost shall be included in Pay Item 209.0100 - Installation, Maintenance, Monitoring, and Removal of BMP.

SURVEY PLOTTED BY	DATE
DRAWN BY	X
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
DATE	

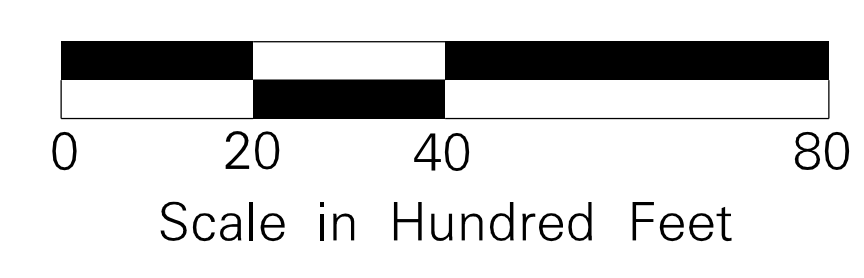

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


ROADWAY PLAN

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: 1" = 20' Date: January 2022

SHEET No. 1 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	20	30

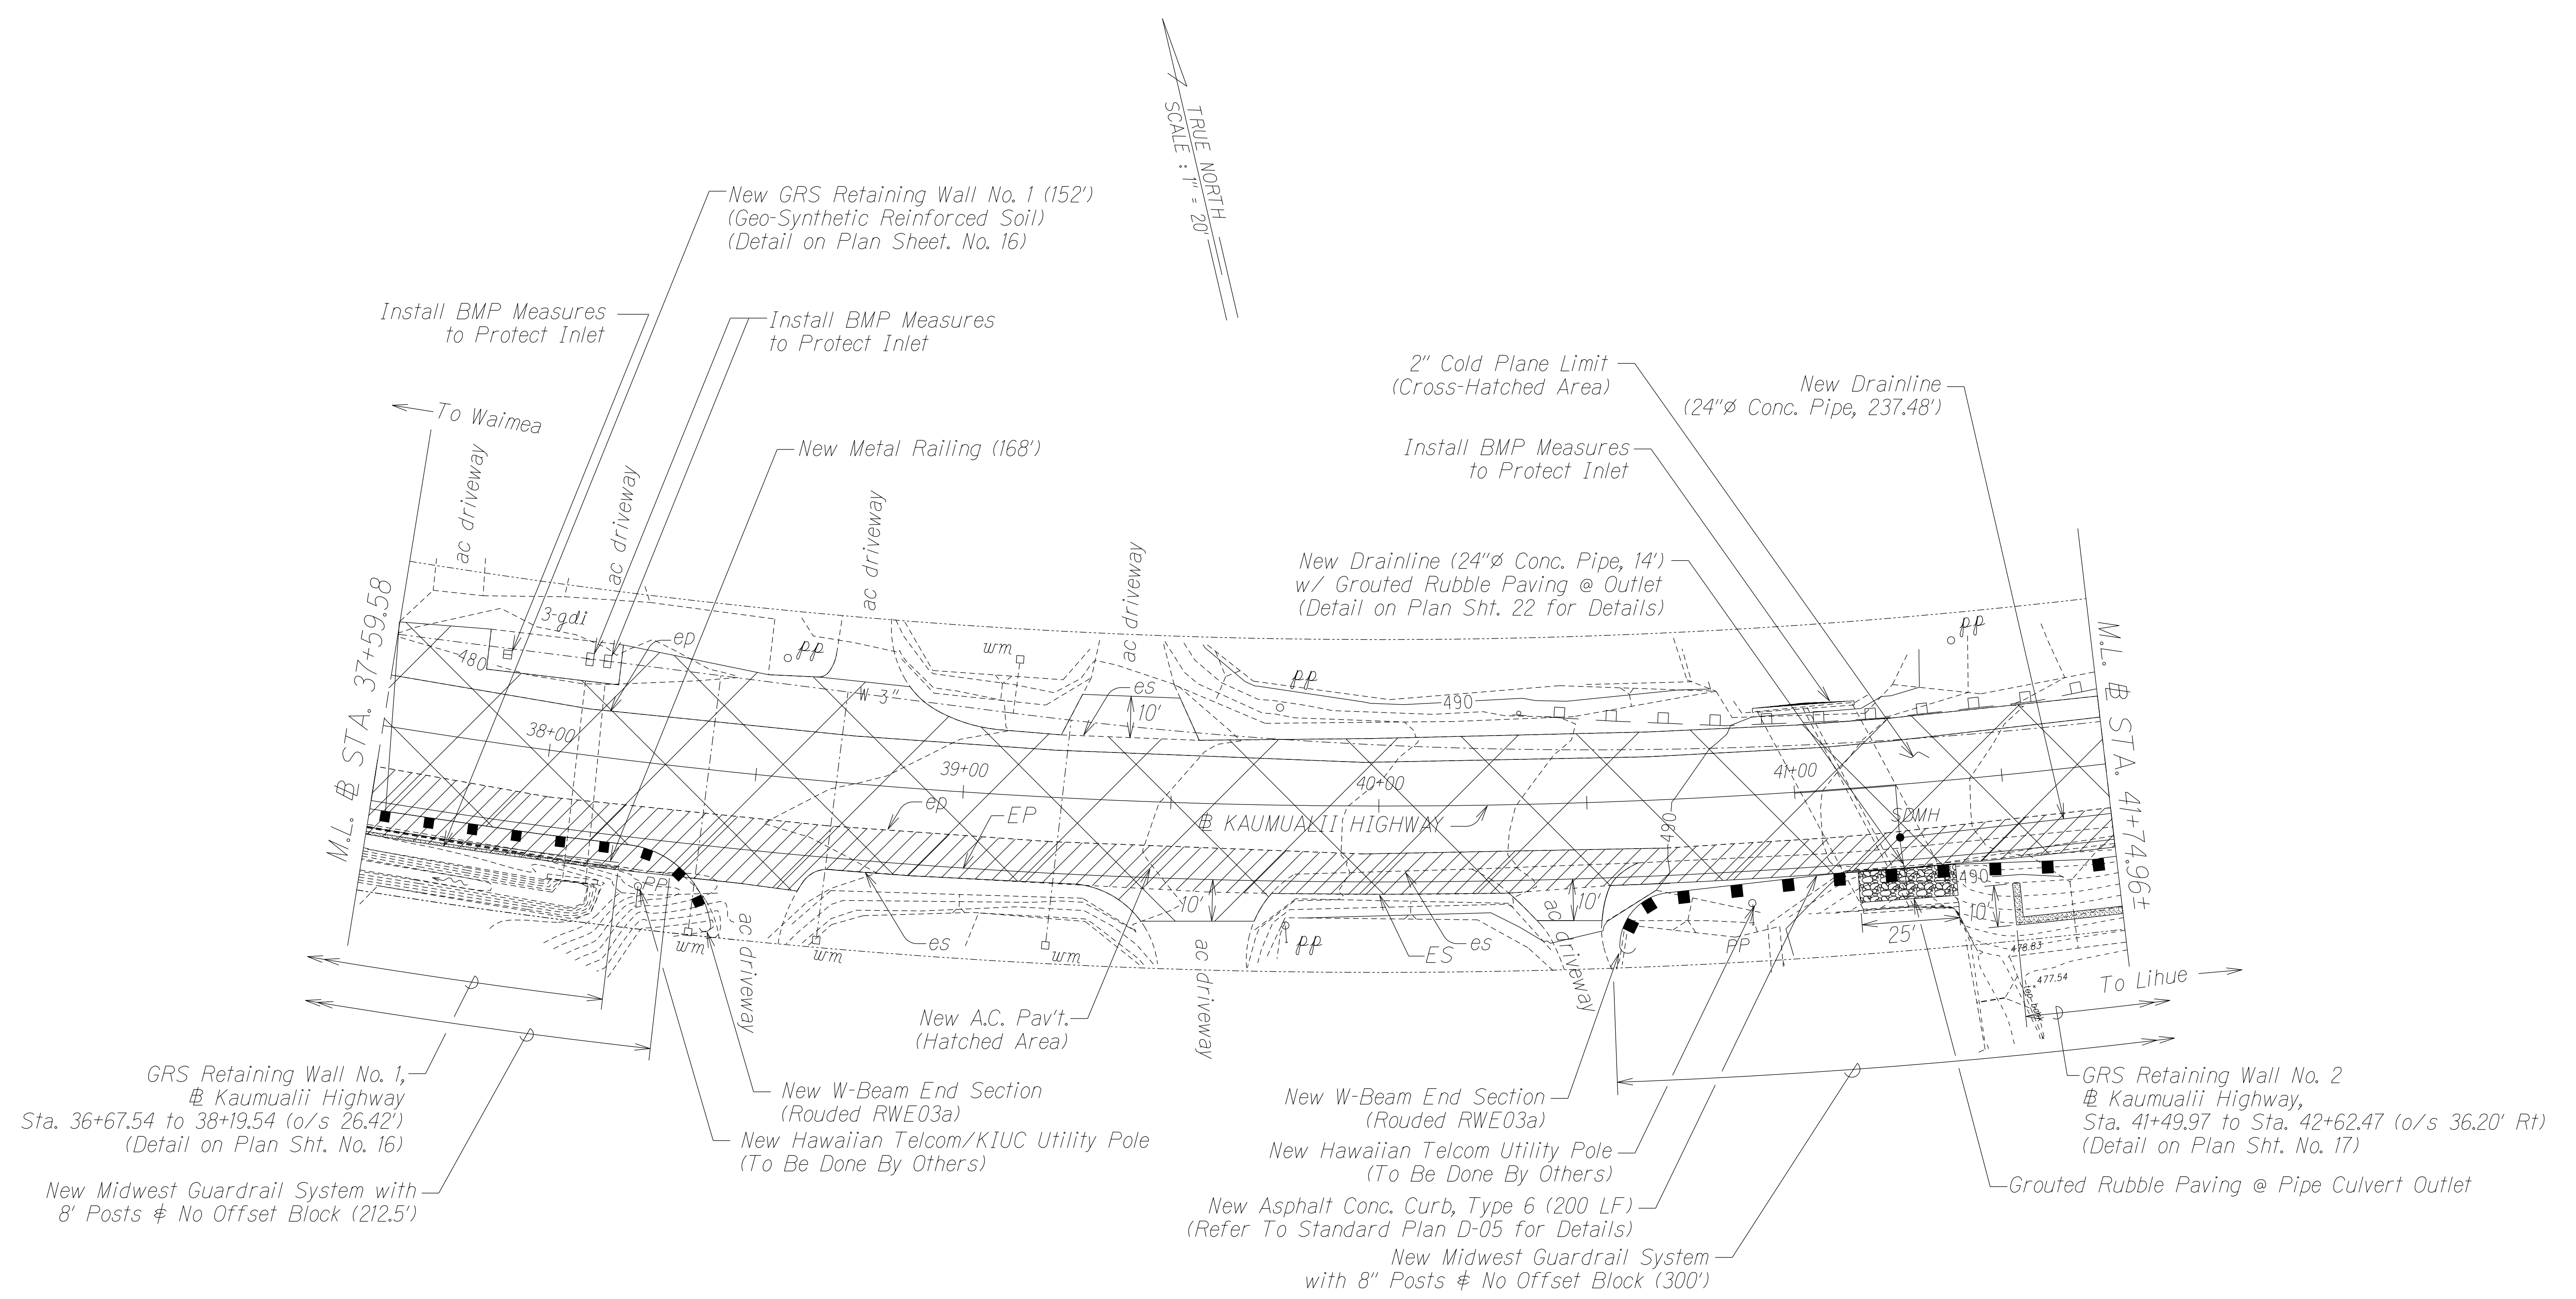

GRS Retaining Wall No. 1, @ Kaumualii Highway, Sta. 36+67.54 to 38+19.54 (o/s 26.42') (Detail on Plan Sht. No. 16)

New Midwest Guardrail System with 8' Posts & No Offset Block (212.5')

New W-Beam End Section (Rounded RWE03a)
New Hawaiian Telcom/KIUC Utility Pole (To Be Done By Others)

New W-Beam End Section (Rounded RWE03a)
New Hawaiian Telcom Utility Pole (To Be Done By Others)
New Asphalt Conc. Curb, Type 6 (200 LF) (Refer To Standard Plan D-05 for Details)
New Midwest Guardrail System with 8' Posts & No Offset Block (300')


GRS Retaining Wall No. 2 @ Kaumualii Highway, Sta. 41+49.97 to Sta. 42+62.47 (o/s 36.20' Rt) (Detail on Plan Sht. No. 17)

Grouted Rubble Paving @ Pipe Culvert Outlet

BMP Note:

- Sediment and Erosion Control BMP measures shown in the Contract Documents are minimum BMP's requirements and do not constitute an acceptable and/or complete Sediment Control Plan. The Contractor shall incorporate additional BMP's based upon their means and methods considering site conditions and construction sequence in accordance with the Contract Documents including applicable permit document requirements. Cost shall be included in Pay Item 209.0100 - Installation, Maintenance, Monitoring, and Removal of BMP.

DATE	_____
SURVEY PLOTTED BY	_____
DRAWN BY	_____
DESIGNED BY	_____
CHECKED BY	_____
NOTES	_____
QUANTITIES BY	_____
CHECKED BY	_____
NO.	_____

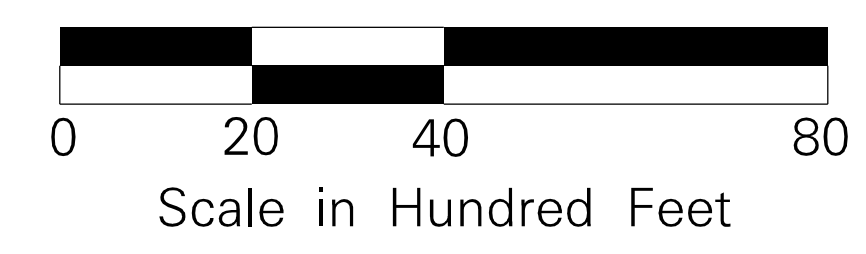

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ROADWAY PLAN

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: 1" = 20' Date: January 2022

SHEET No. 2 OF 3 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	21	30

BMP Note:

- Sediment and Erosion Control BMP measures shown in the Contract Documents are minimum BMP's requirements and do not constitute an acceptable and/or complete Sediment Control Plan. The Contractor shall incorporate additional BMP's based upon their means and methods considering site conditions and construction sequence in accordance with the Contract Documents including applicable permit document requirements. Cost shall be included in Pay Item 209.0100 - Installation, Maintenance, Monitoring, and Removal of BMP.

TRUE NORTH
SCALE: 1" = 20'

⊕ CURVE DATA
 $\Delta = 42^\circ 53' 00''$
 $R = 1,500.00'$
 $T = 589.10'$
 $C = 1,096.66'$
 $Lc = 1,122.68'$

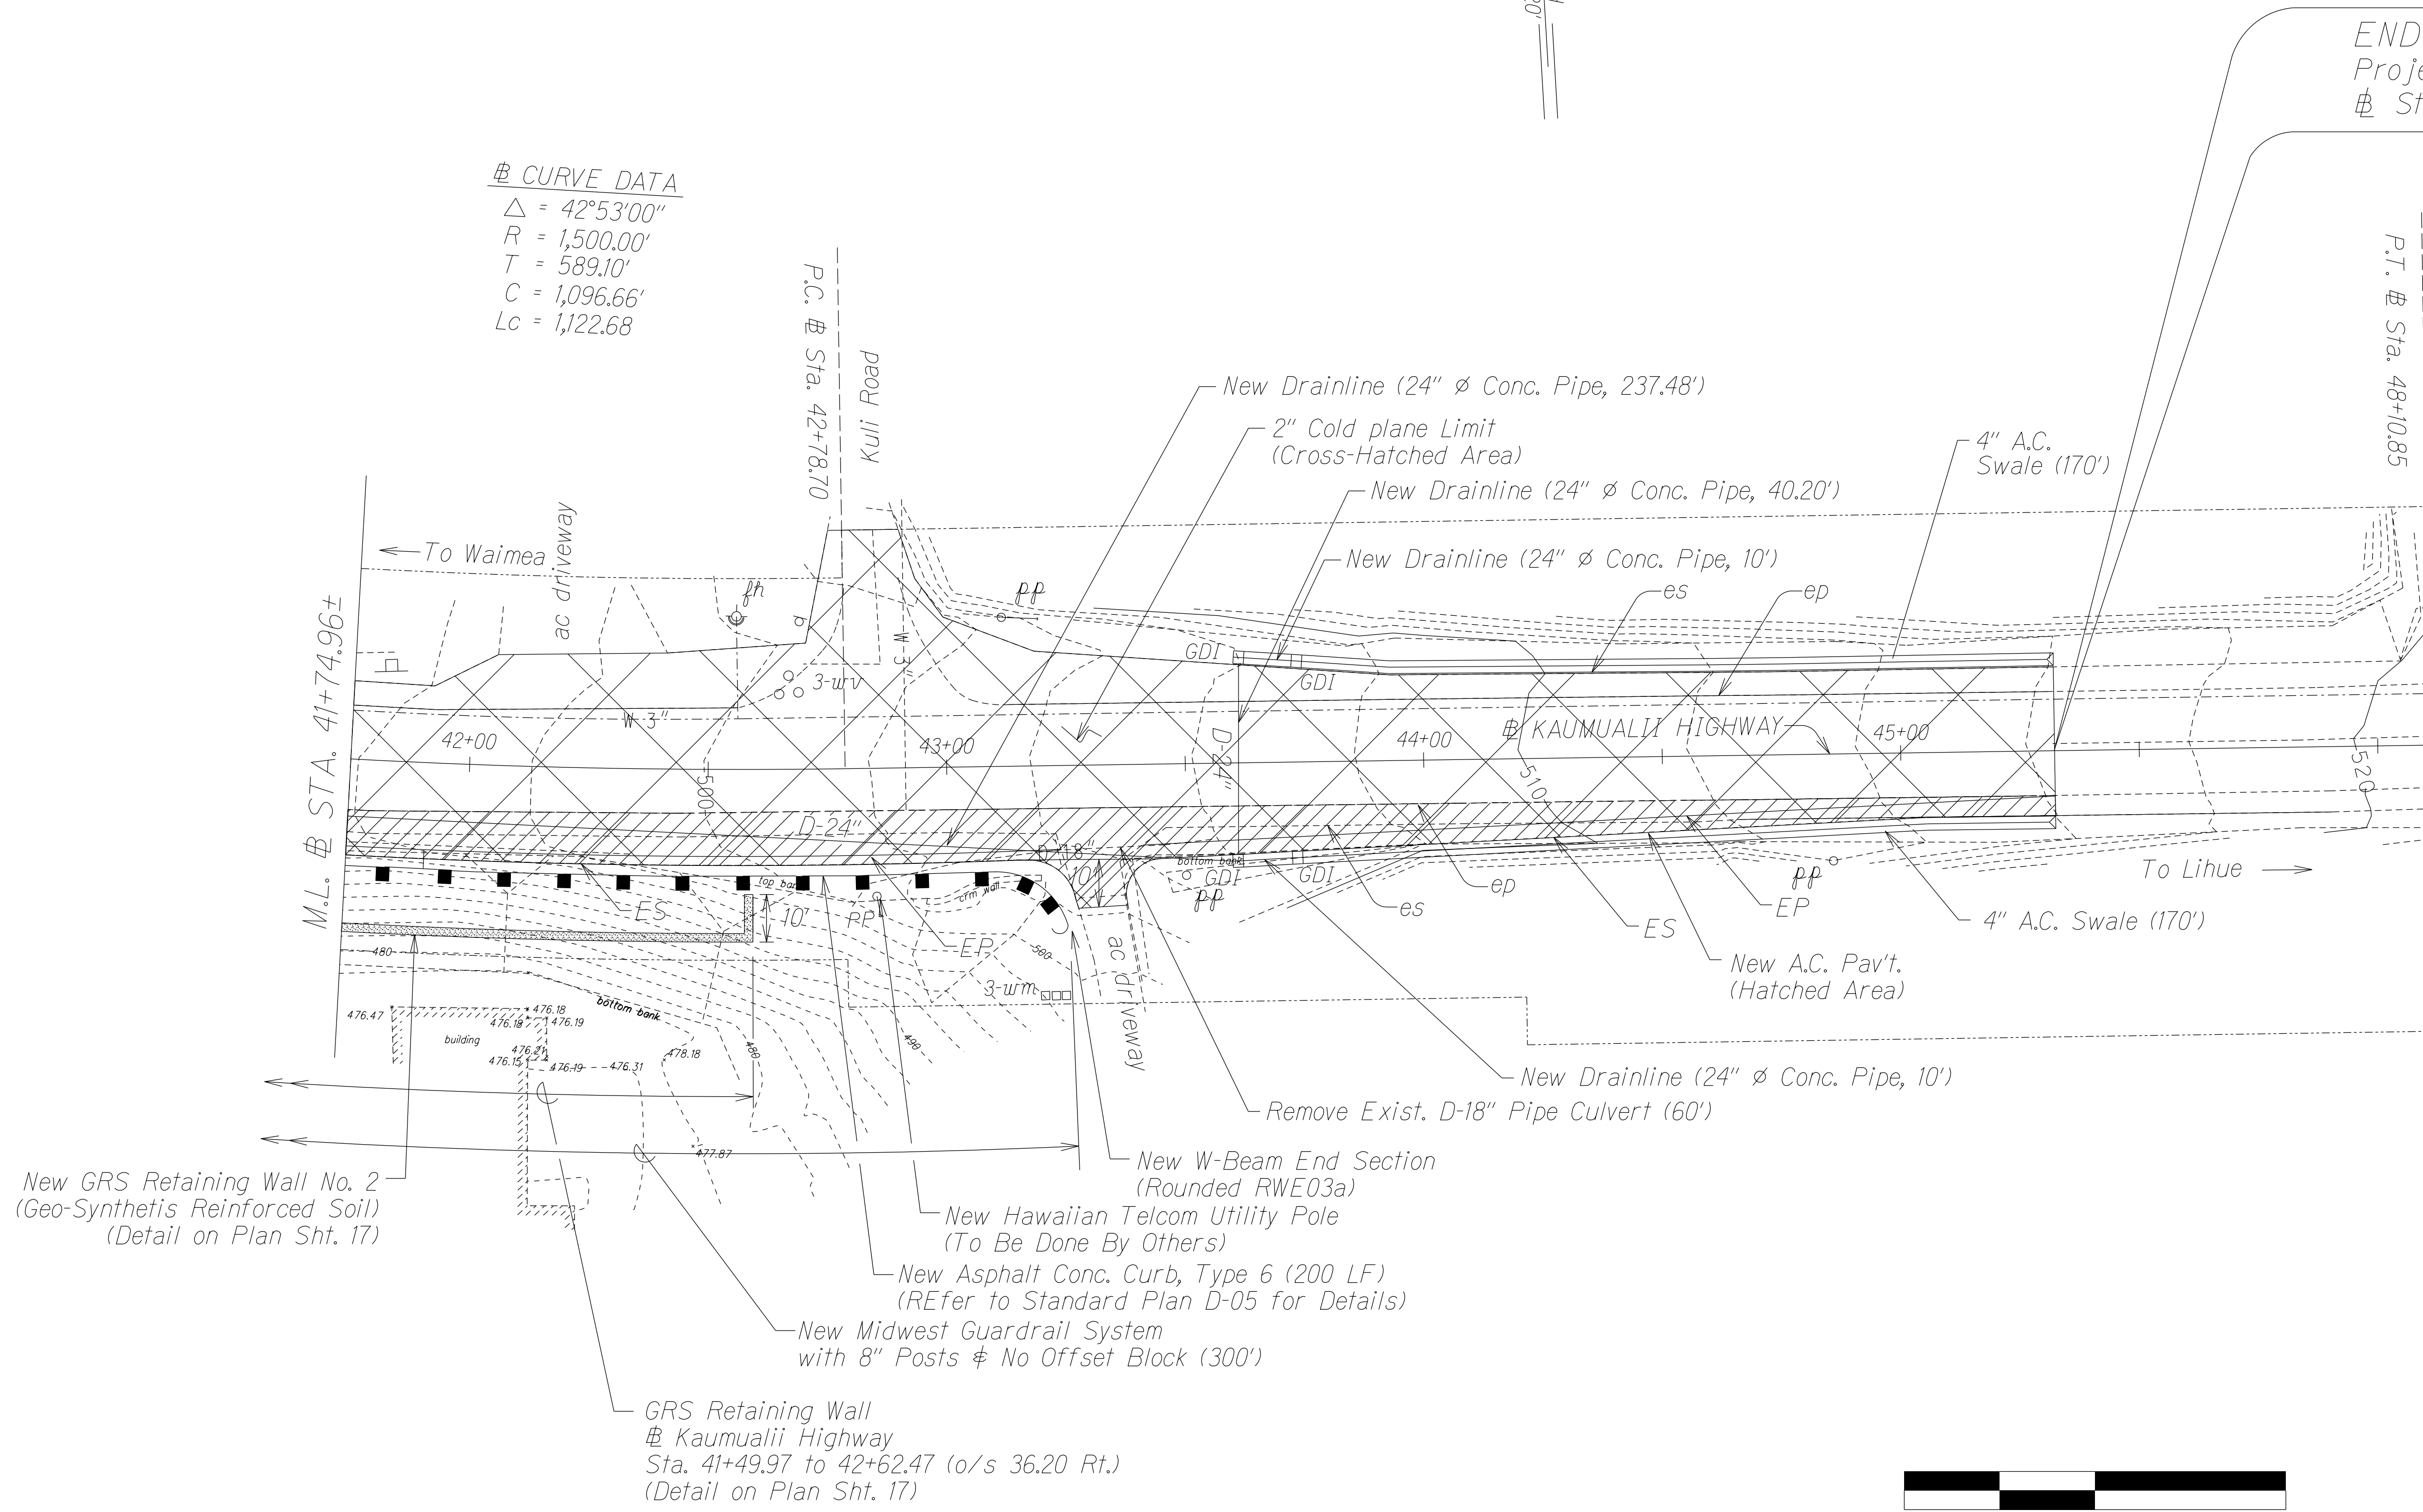

END PROJECT
 Project No. 50C-01-18
 ⊕ Sta. 45+31.63±

DATE	X
SURVEY PLOTTED BY	
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
CHANGES	
NO.	

New GRS Retaining Wall No. 2
 (Geo-Synthetic Reinforced Soil)
 (Detail on Plan Sht. 17)

GRS Retaining Wall
 ⊕ Kaumualii Highway
 Sta. 41+49.97 to 42+62.47 (o/s 36.20 Rt.)
 (Detail on Plan Sht. 17)



STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION

ROADWAY PLAN


KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
 Lauoho Road and Kuli Road
 Project No. 50C-01-18

Scale: 1" = 20' Date: January 2022


SHEET No. 3 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	22	30

TRUE NORTH
SCALE: 1" = 20'

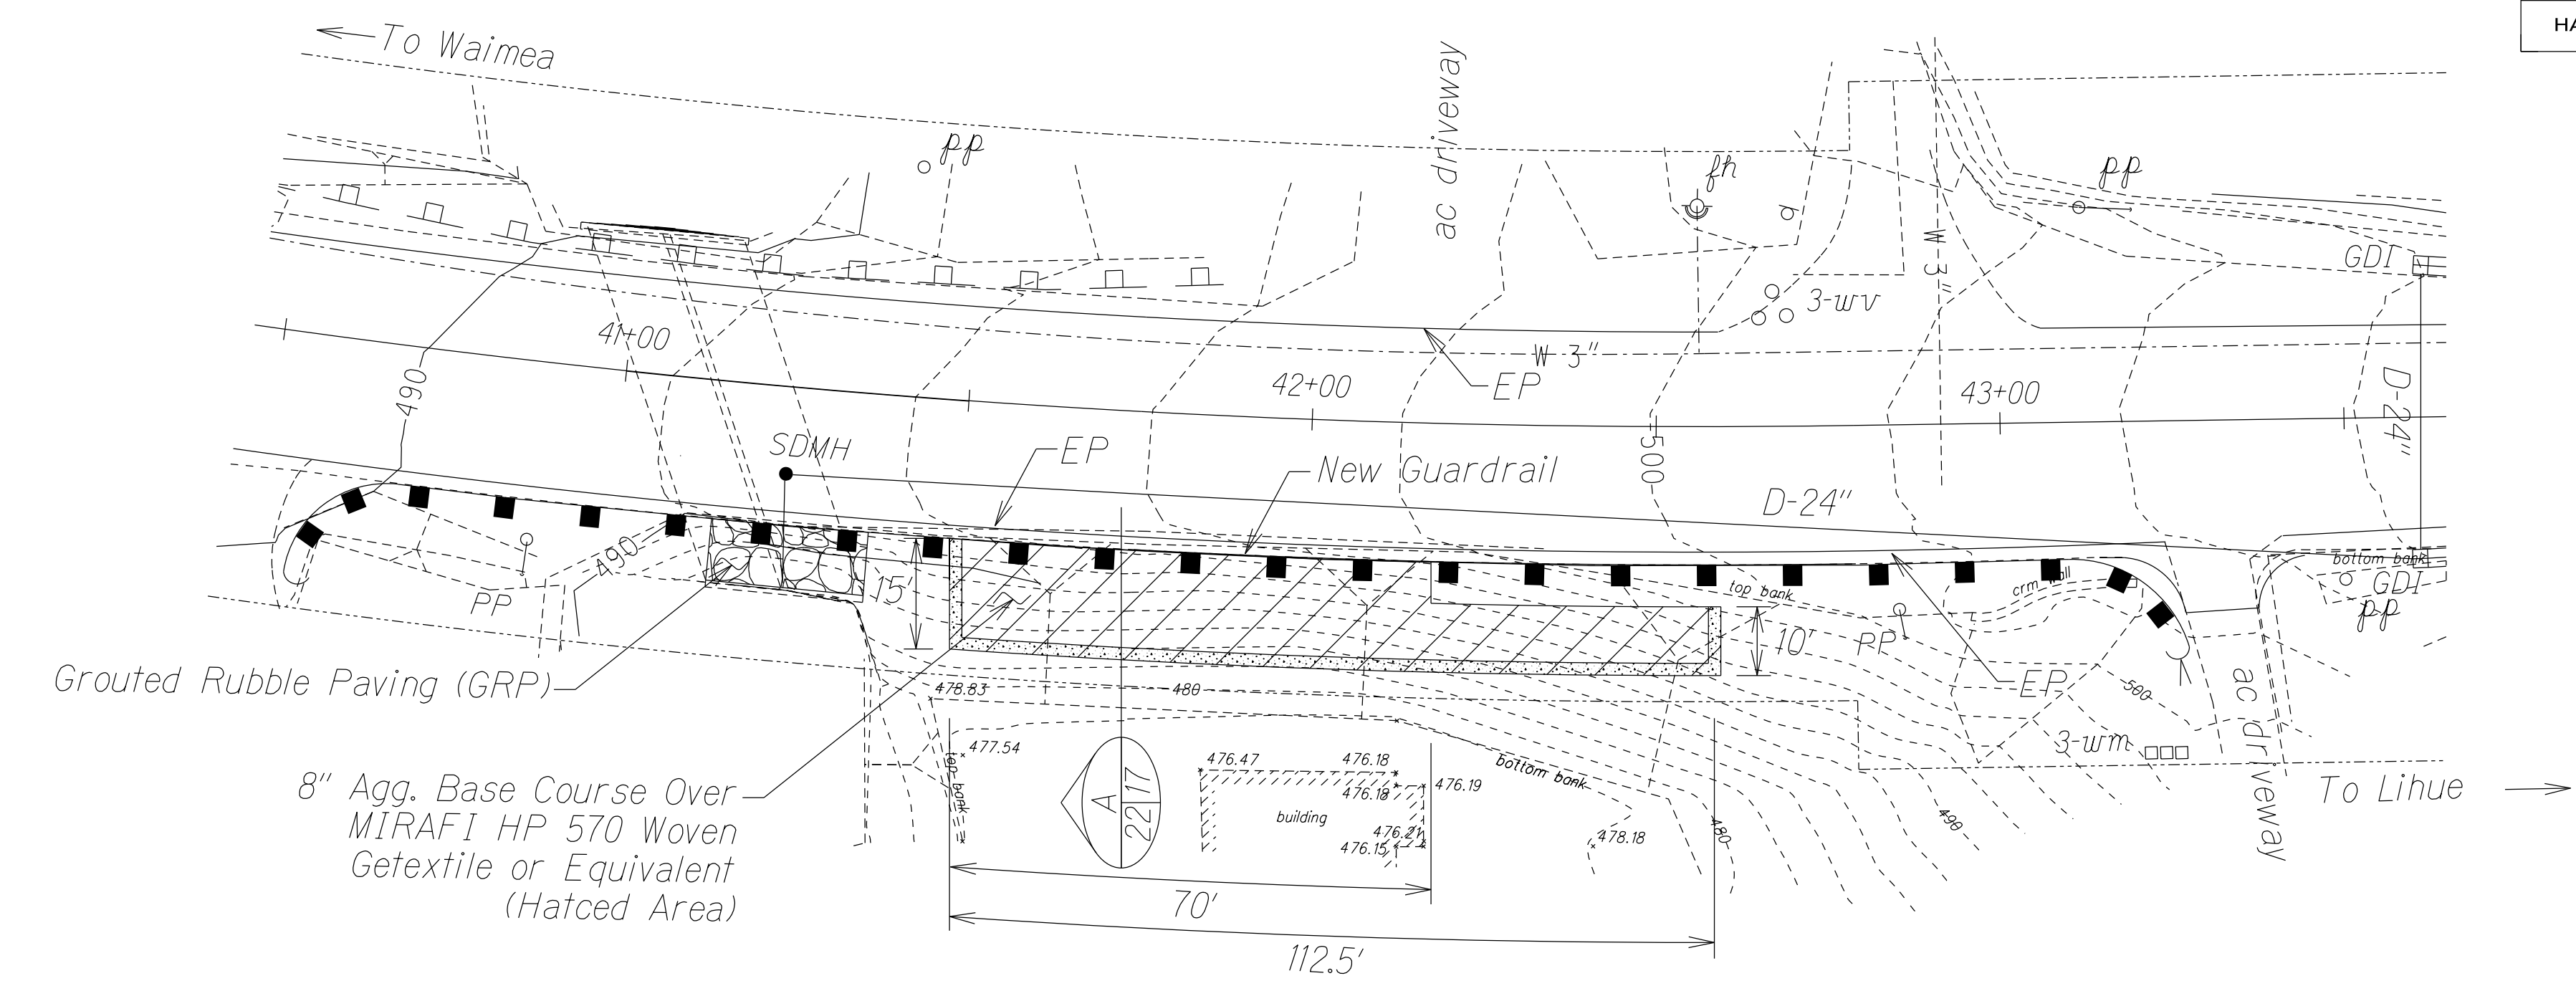

PLAN - RETAINING WALL NO. 2 AND PIPE CULVERT OUTLET
Scale 1" = 20'

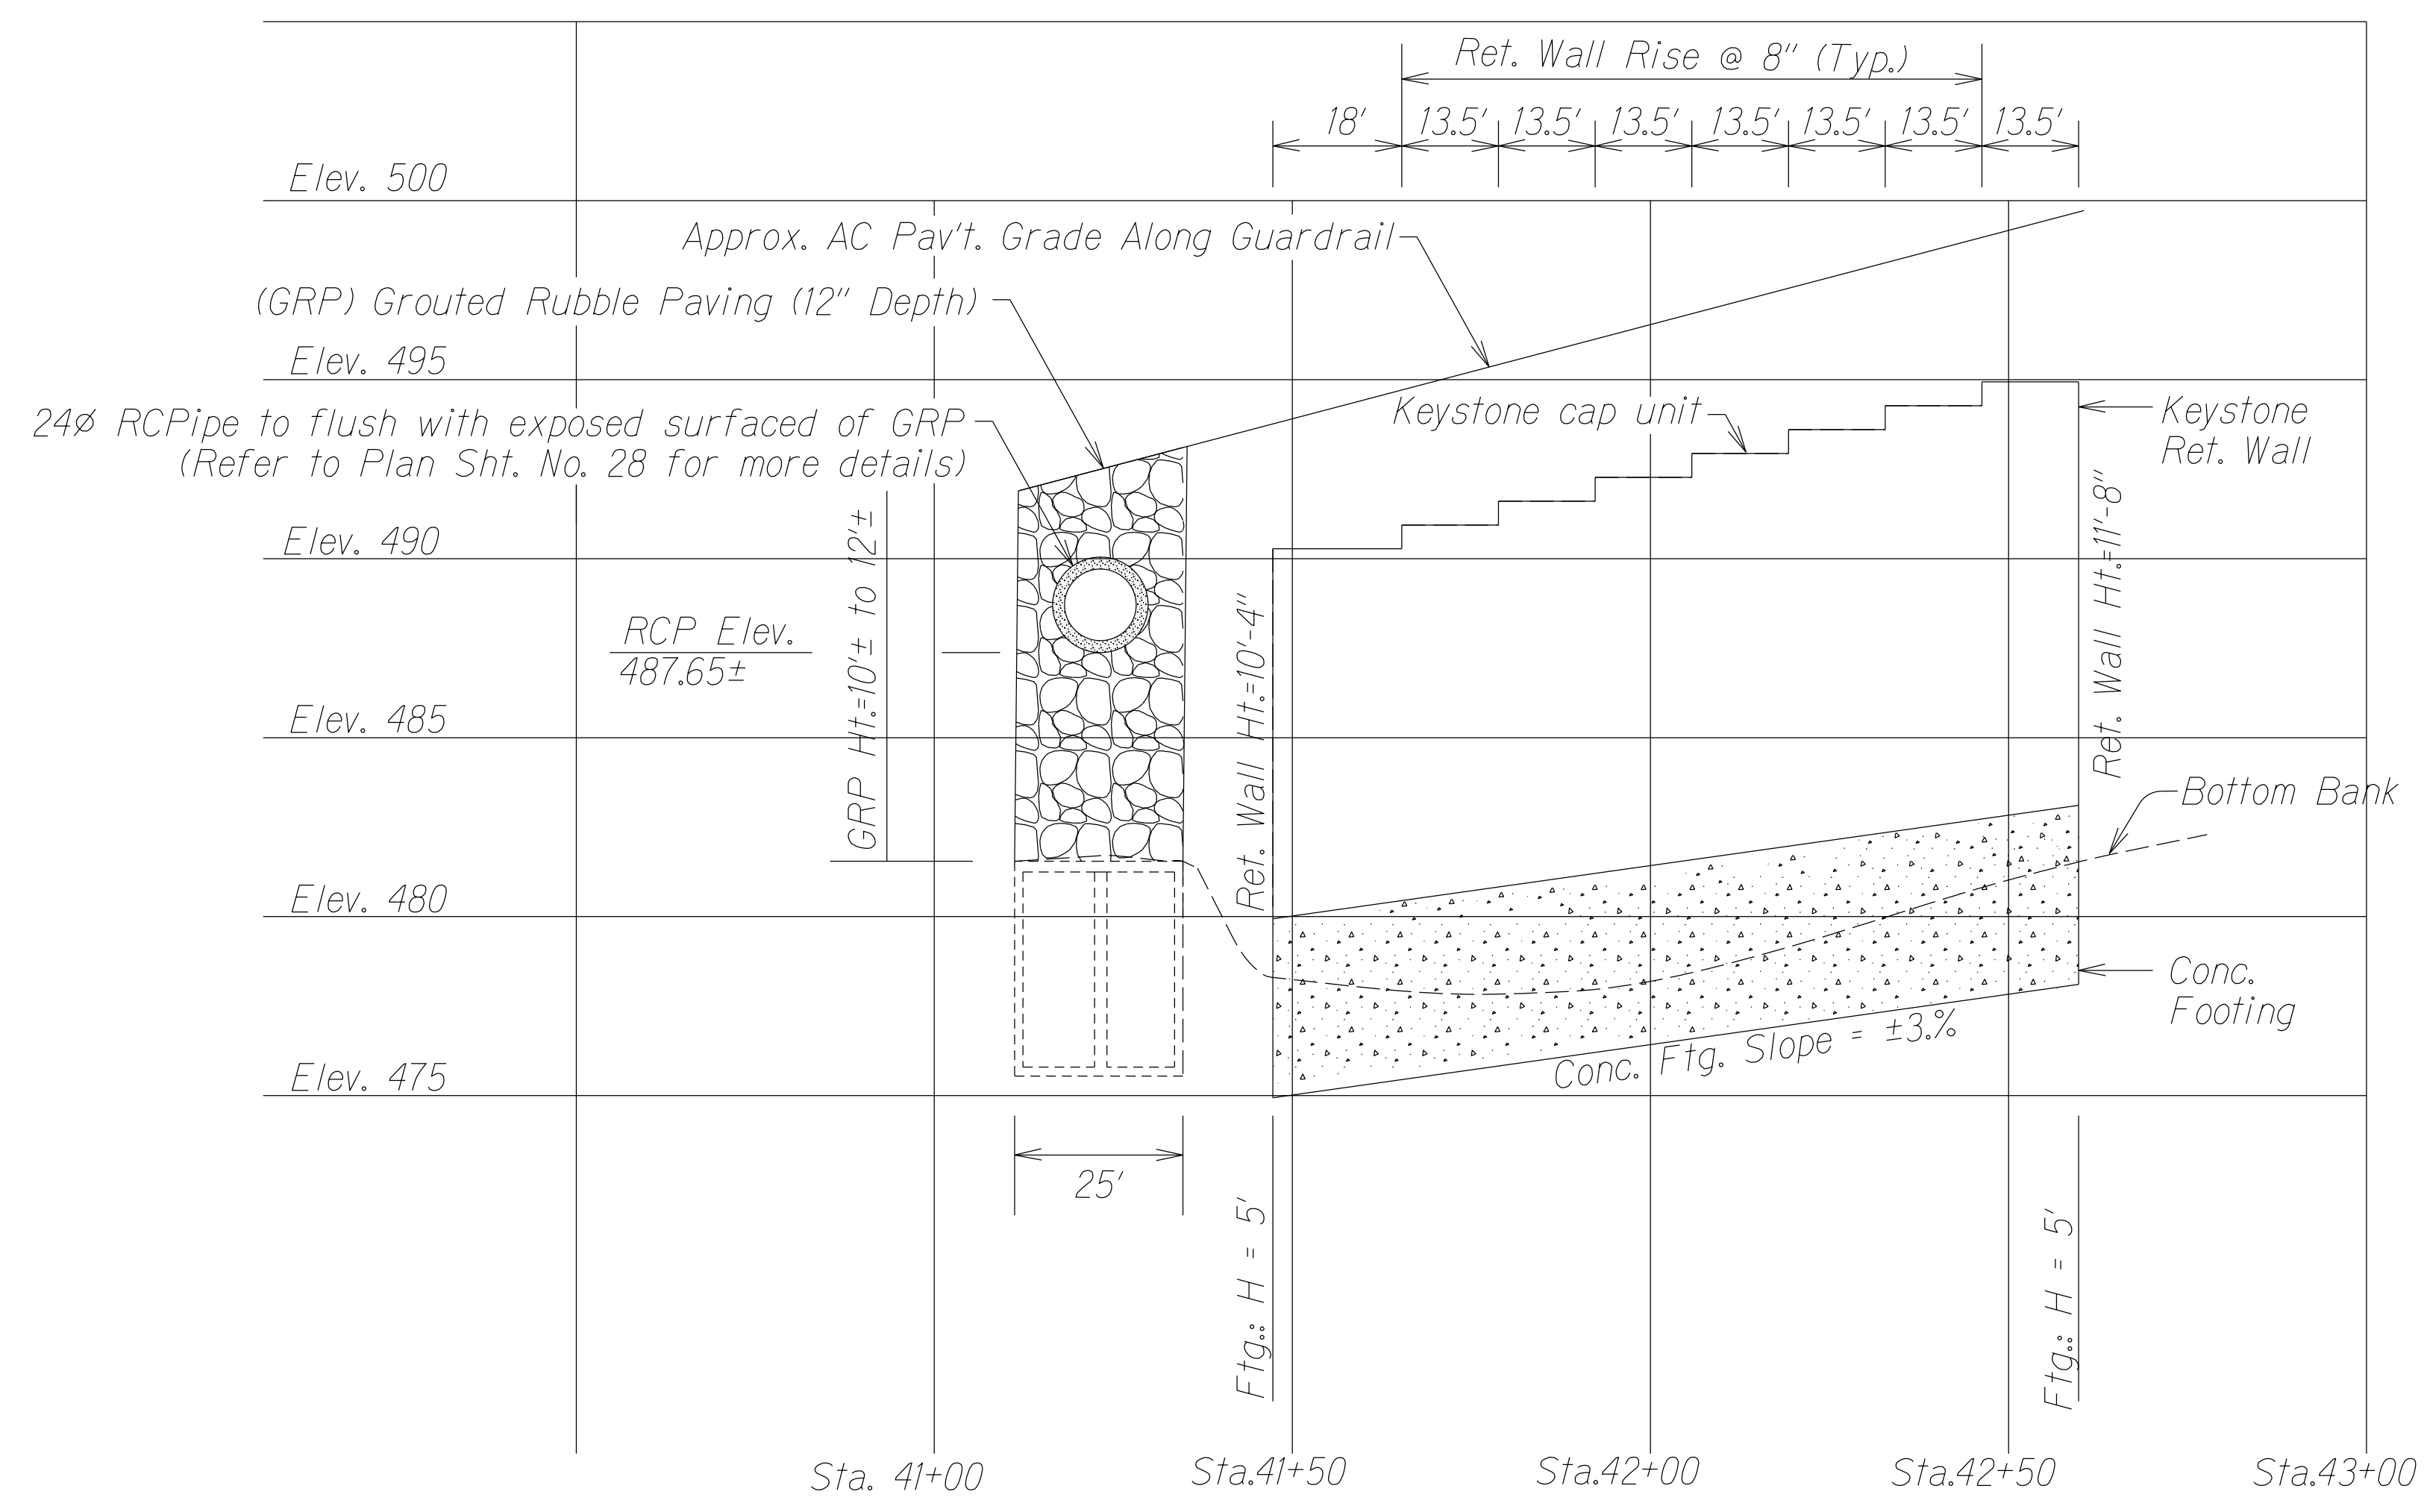

PROFILE - RETAINING WALL NO. 2 AND PIPE CULVERT OUTLET
Scales: Horiz. 1" = 20'; Vert. 1" = 4'


ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
DESIGNED BY	DESIGNED BY	
NOTED BY	NOTED BY	
CHECKED BY	CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


RETAINING WALL NO. 2 AND PIPE CULVERT PLAN AND PROFILE

KAUMUALI HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18
Scale: 1" = 20' Date: January 2022

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	23	30

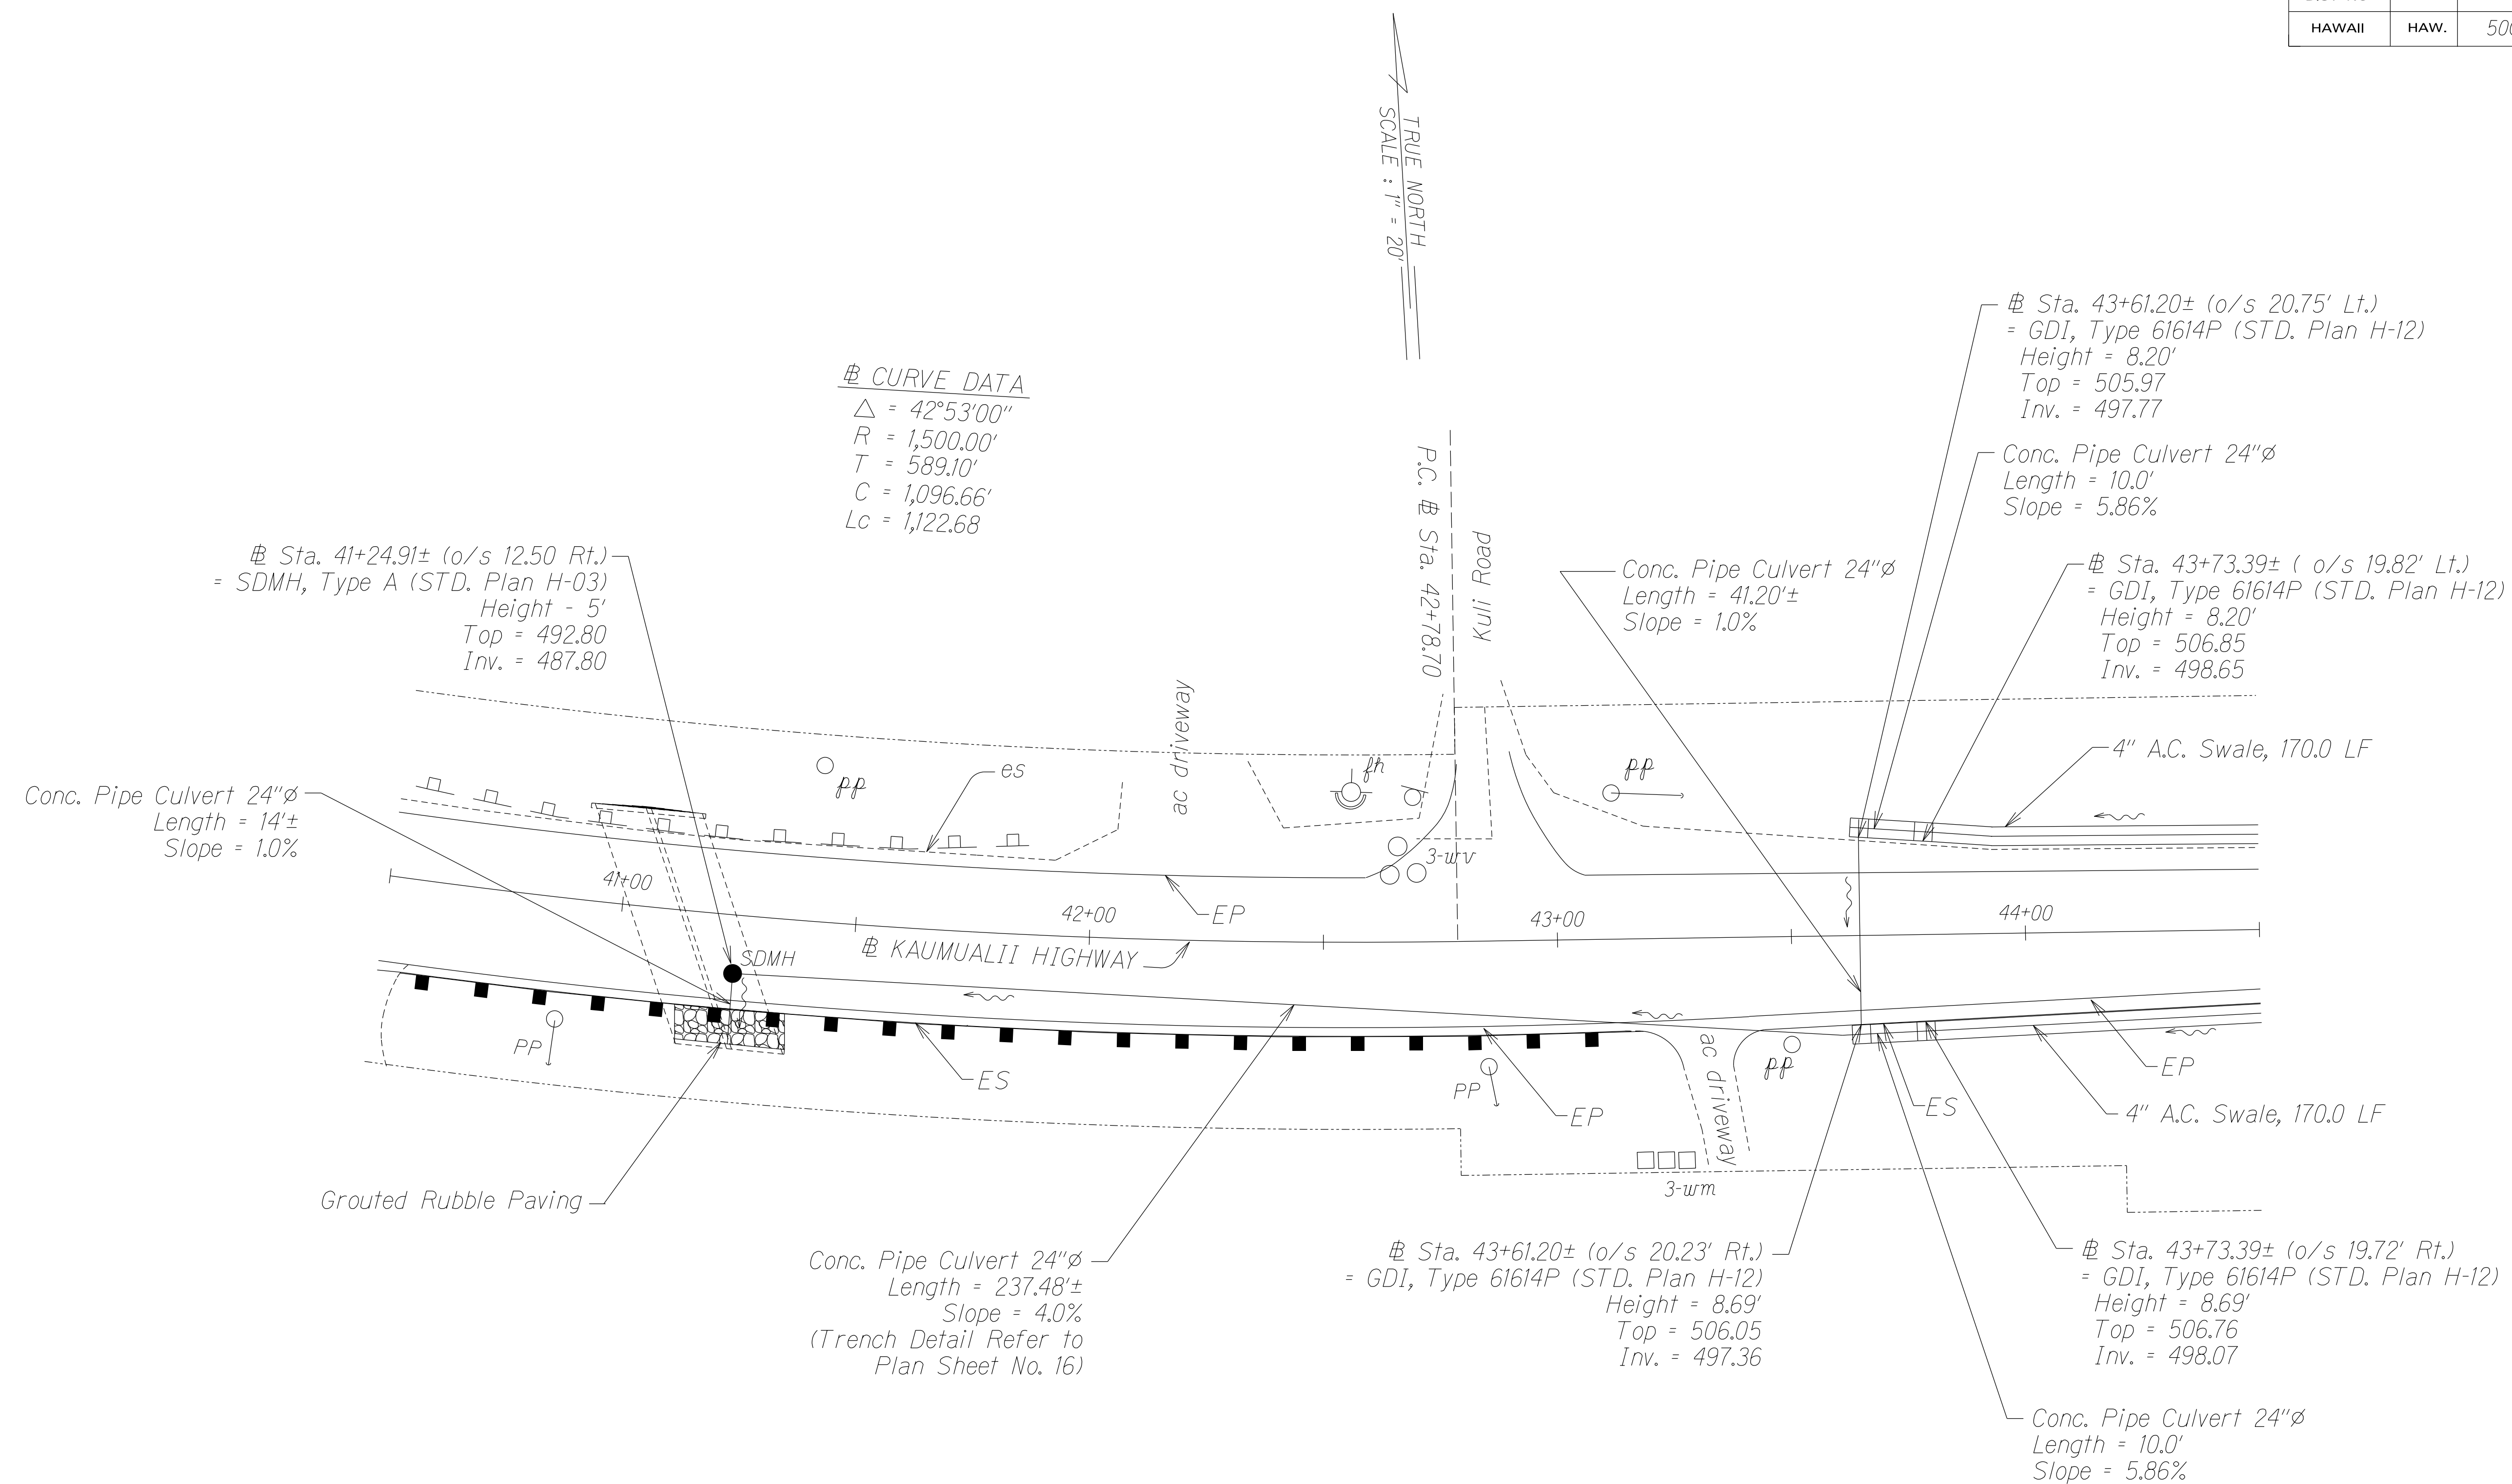

ORIGINAL PLAN	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

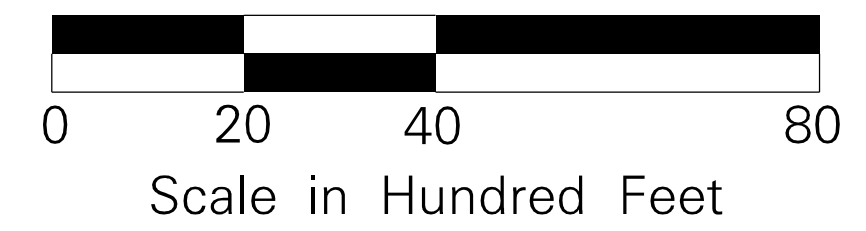

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

DRAINAGE PLAN

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: 1" = 20' Date: January 2022

SHEET No. 1 OF 1 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	24	30

LEGEND


- 10' White Profiled Thermoplastic Stripe
- Type C Raised Pavement Markers @ 40'-0" o.c.
- 10' Yellow Profiled Thermoplastic Stripe
- Type D Raised Pavement Markers @ 40'-0" o.c.
- 8" White Stripe with Type C Raised Pavement Markers @ 20'-0" o.c. (Tape, Type I or Thermoplastic Extrusion)
- 4" Double Solid Yellow Stripes with Type D Raised Pavement Markers On Both Outside Edges Of 4" Yellow Stripe @ 10'-0" o.c. (Tape, Type I Or Thermoplastic Extrusion)
- 4" Double Solid Yellow Stripes with Type H Raised Pavement Markers On Both Outside Edges Of 4" Yellow Stripe @ 10'-0" o.c. (Tape, Type II Or Thermoplastic Extrusion)
- 6" Yellow Edge Stripe with Type H Raised Pavement Markers @ 10'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
- 4" Double Solid White Stripes with Type C Raised Pavement Markers @ 20'-0" o.c. (Tape, Type I or Thermoplastic Extrusion)
- Lane Change Restriction Marking
- 10' White Profiled Thermoplastic Stripe
Type C Raised Pavement Markers @ 20'-0" o.c.
4" White Stripe (Tape, Type I or Thermoplastic Extrusion)
- 6" or 8" White Edge Stripe with Type C Raised Pavement Markers @ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
- 4" White Guide Line (Tape, Type III or Thermoplastic Extrusion except for bus bays)
- Transverse Median Marking (Tape, Type II or Thermoplastic Extrusion)
- Transverse Shoulder Marking (Tape, Type II or Thermoplastic Extrusion)
- Channelizing Island or Deceleration Lane Gore (Tape, Type II or Thermoplastic Extrusion)
- ② Crosswalk and Stop Line. All Stop Lines shall be 10'-0" from Crosswalk unless otherwise noted. The circled number indicates the number of lanes for pavement (Tape, Type III or Thermoplastic Extrusion)
- Pavement Arrow (Tape, Type III or Thermoplastic Extrusion)
- STOP Pavement Word (Tape, Type III or Thermoplastic Extrusion)
- 10' Yellow Profiled Thermoplastic Stripe @ 40'-0" o.c.
Type D Raised Pavement Markers on Outside Edge and Midway Between Yellow Profiled Thermoplastic Stripe @ 40'-0" o.c. (Passing Direction)
Type D Raised Pavement Markers on Outside Edge of 4" Single Solid Yellow Stripe @ 10'-0" o.c. (No-Passing Direction)
4" Single Solid Yellow Stripe (Tape, Type I or Thermoplastic Extrusion)
- Extension of Edge Line, 4" Wide x 2'-0" Long White Stripe @ 10'-0" o.c. w/Type C Markers @ 40'-0" o.c. (Tape, Type III or Thermoplastic Extrusion)

NOTES


1. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
3. Raised pavement markers shall not be installed within crosswalks.
4. Final locations of all signs shall be approved by the Engineer prior to any installation work.
5. Existing signs not shown on these plans shall remain as posted unless otherwise directed by the Engineer. Removal and disposal of existing signs and/or posts as designated on these plans shall be incidental to the various signing items.
6. Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
7. All pavement striping shall be as noted on the legend or plans.
8. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
9. All pedestrian warning signs with supplemental sign shall be on a fluorescent yellow-green retroreflective background with a black legend or border.
10. Object marker (OM-5) shall be Vis-Z-Shield manufactured by Zumar or approved equal.
11. Background of object marker shall be retroreflectorized with Type XI Retroreflective sheeting.
12. The color of the object marker (retroreflective sheeting) shall be red for "STOP" and "YIELD" signs, others shall be yellow retroreflective sheeting.

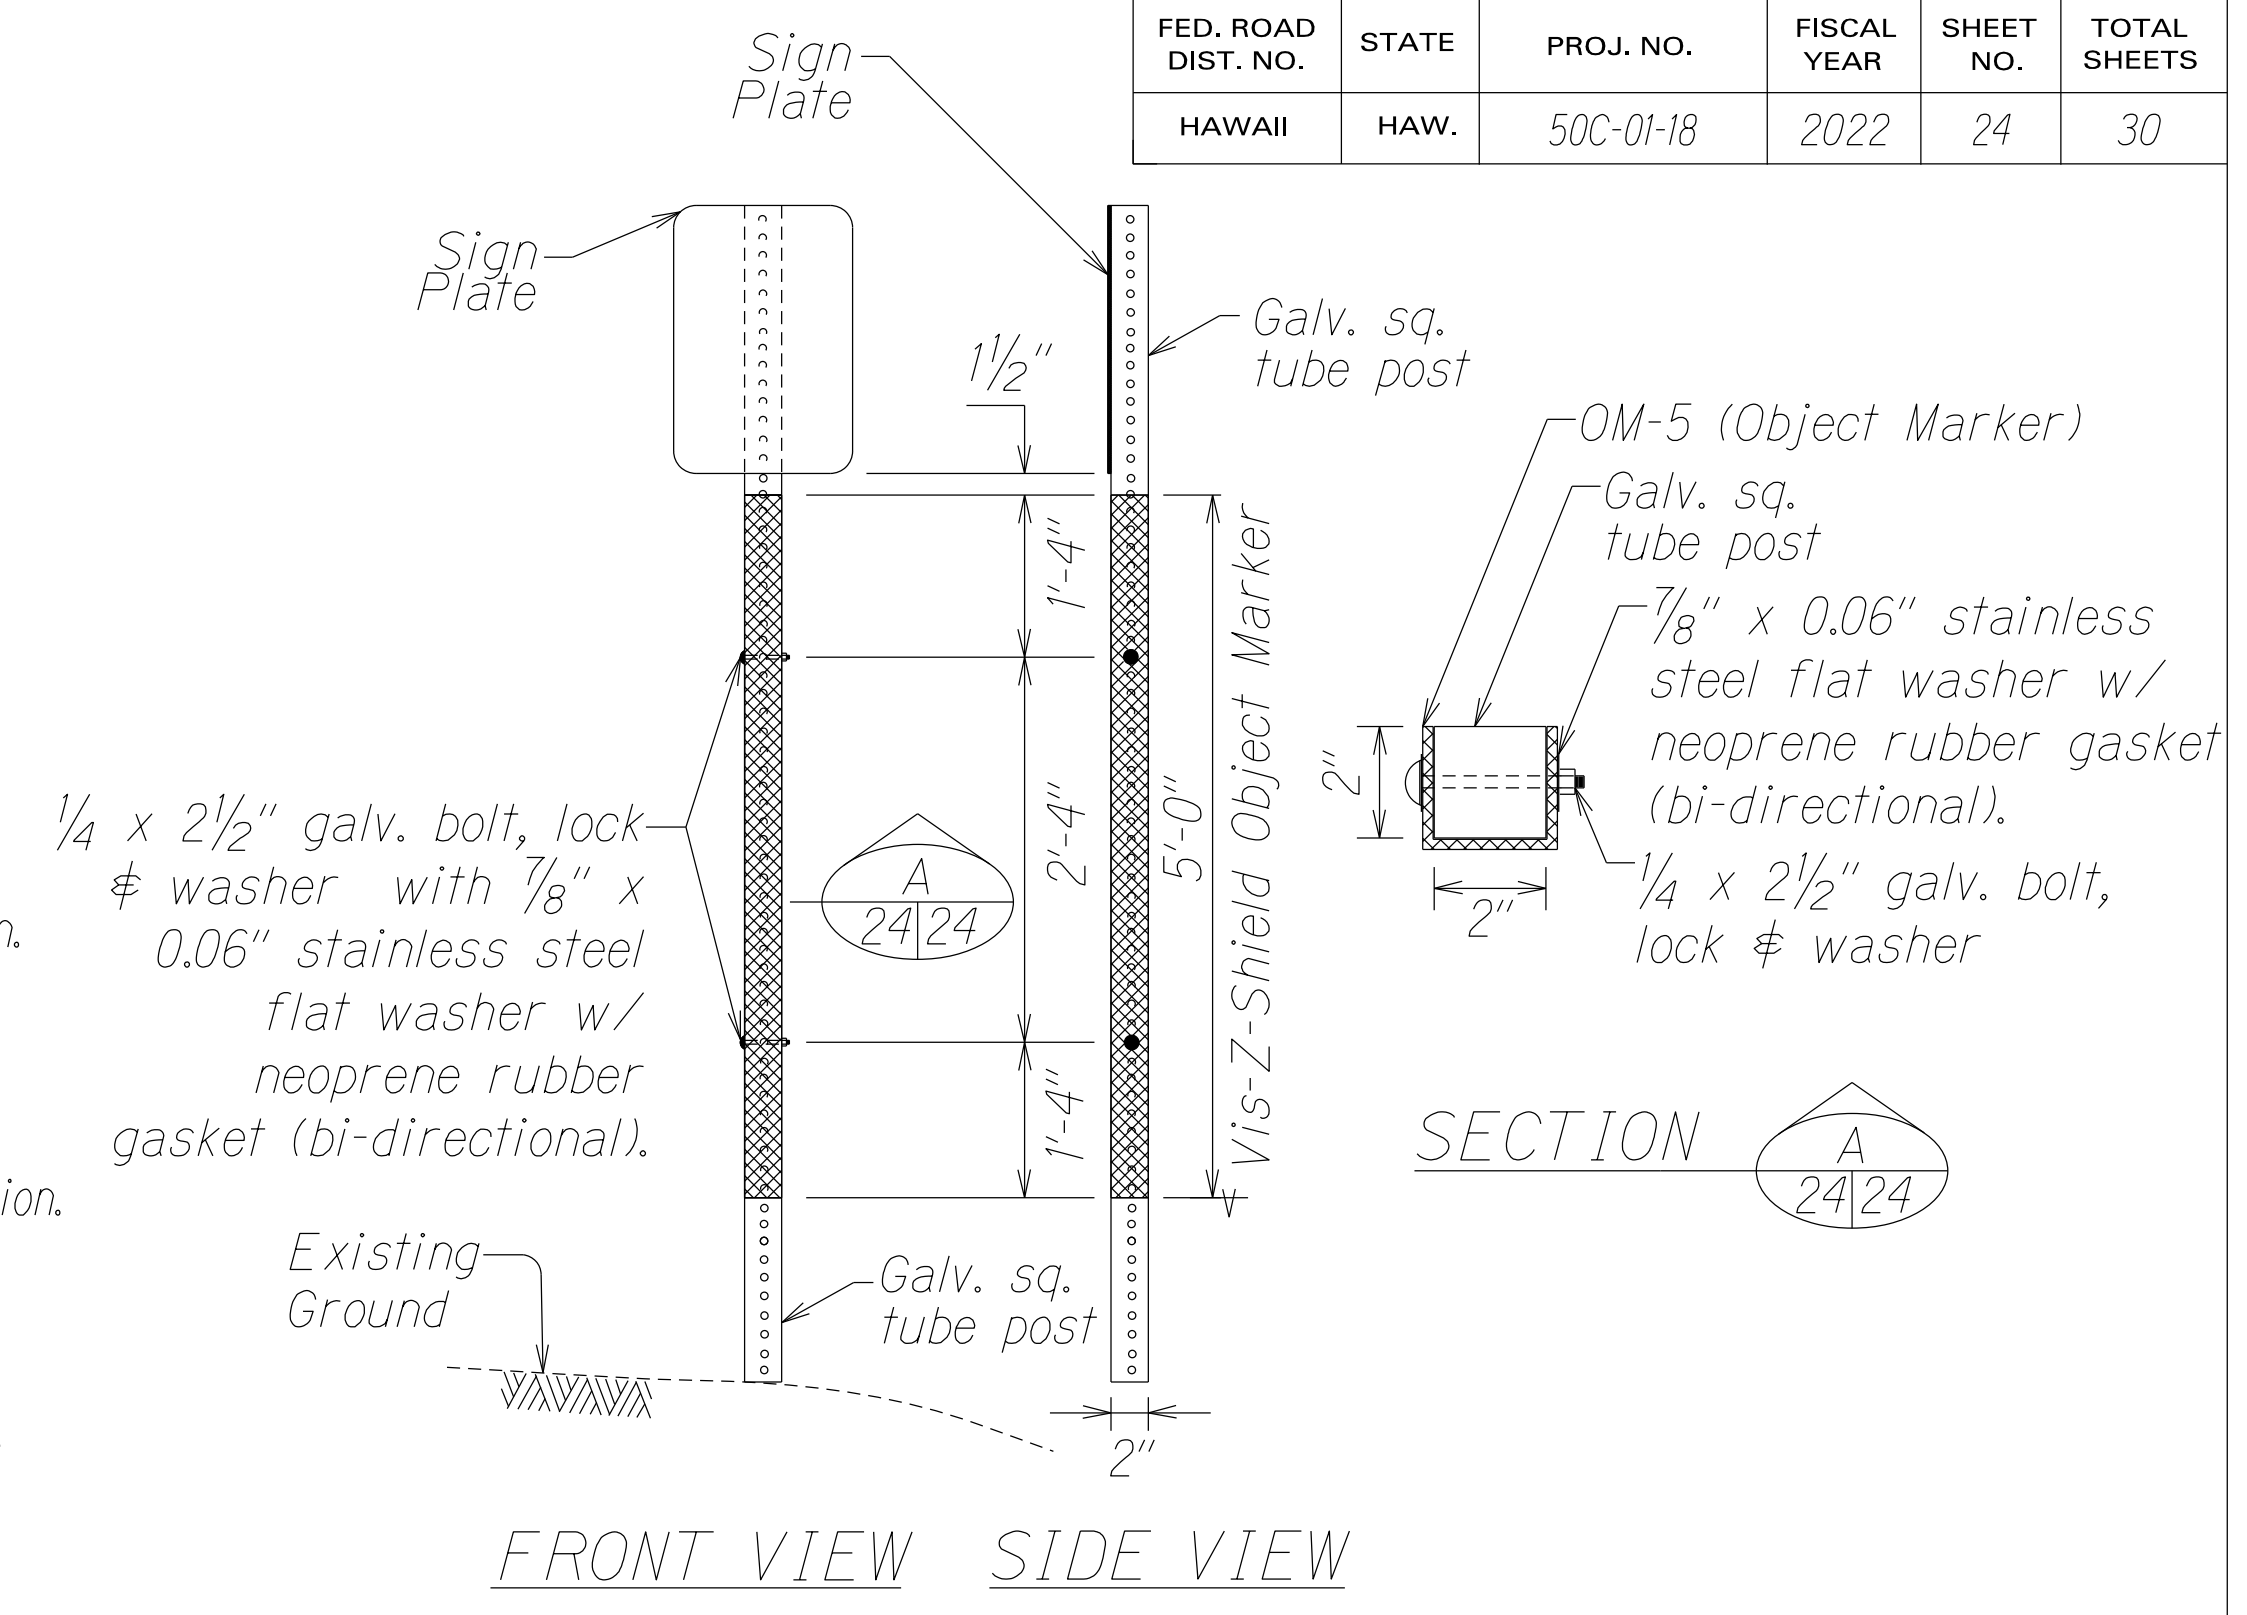


OBJECT MARKER (OM-5) DETAIL @ TRAFFIC SIGN POST
Not to Scale

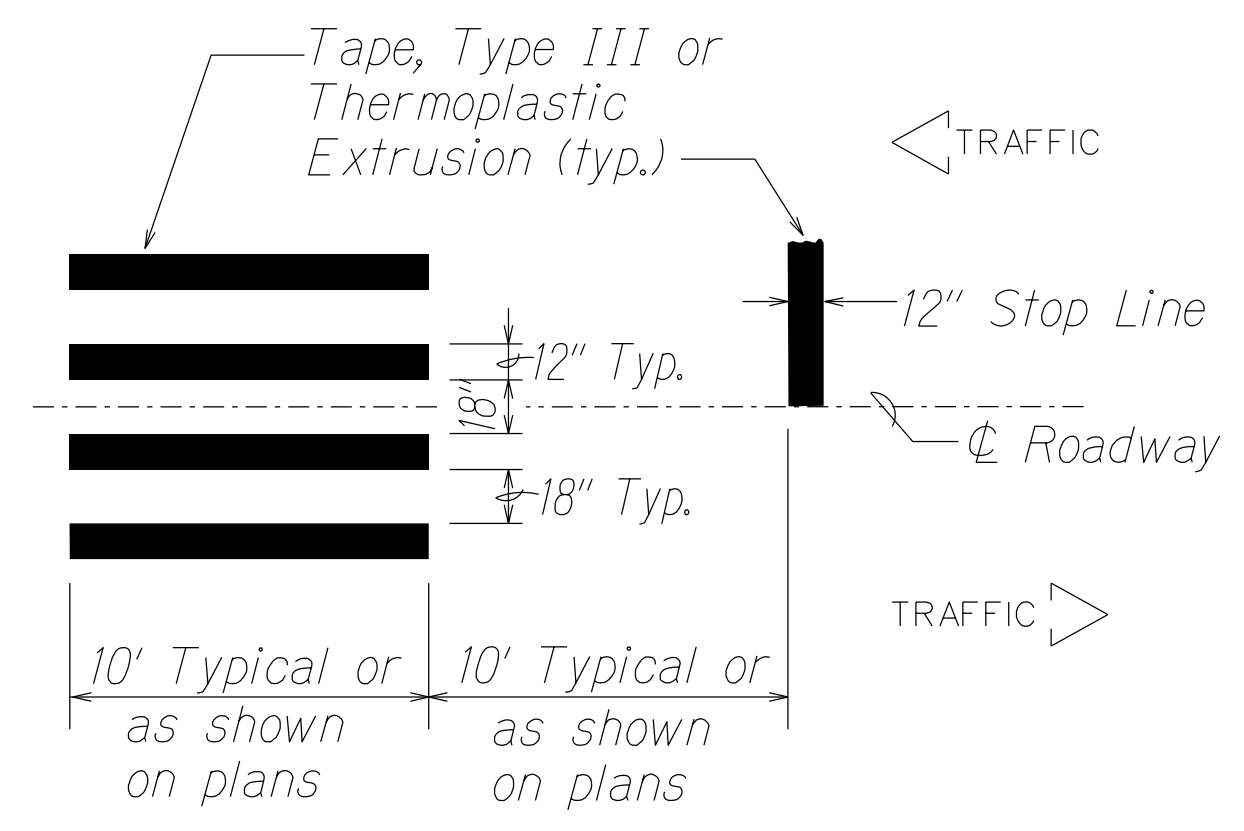


CROSSWALK STRIPING DETAIL
Not to Scale

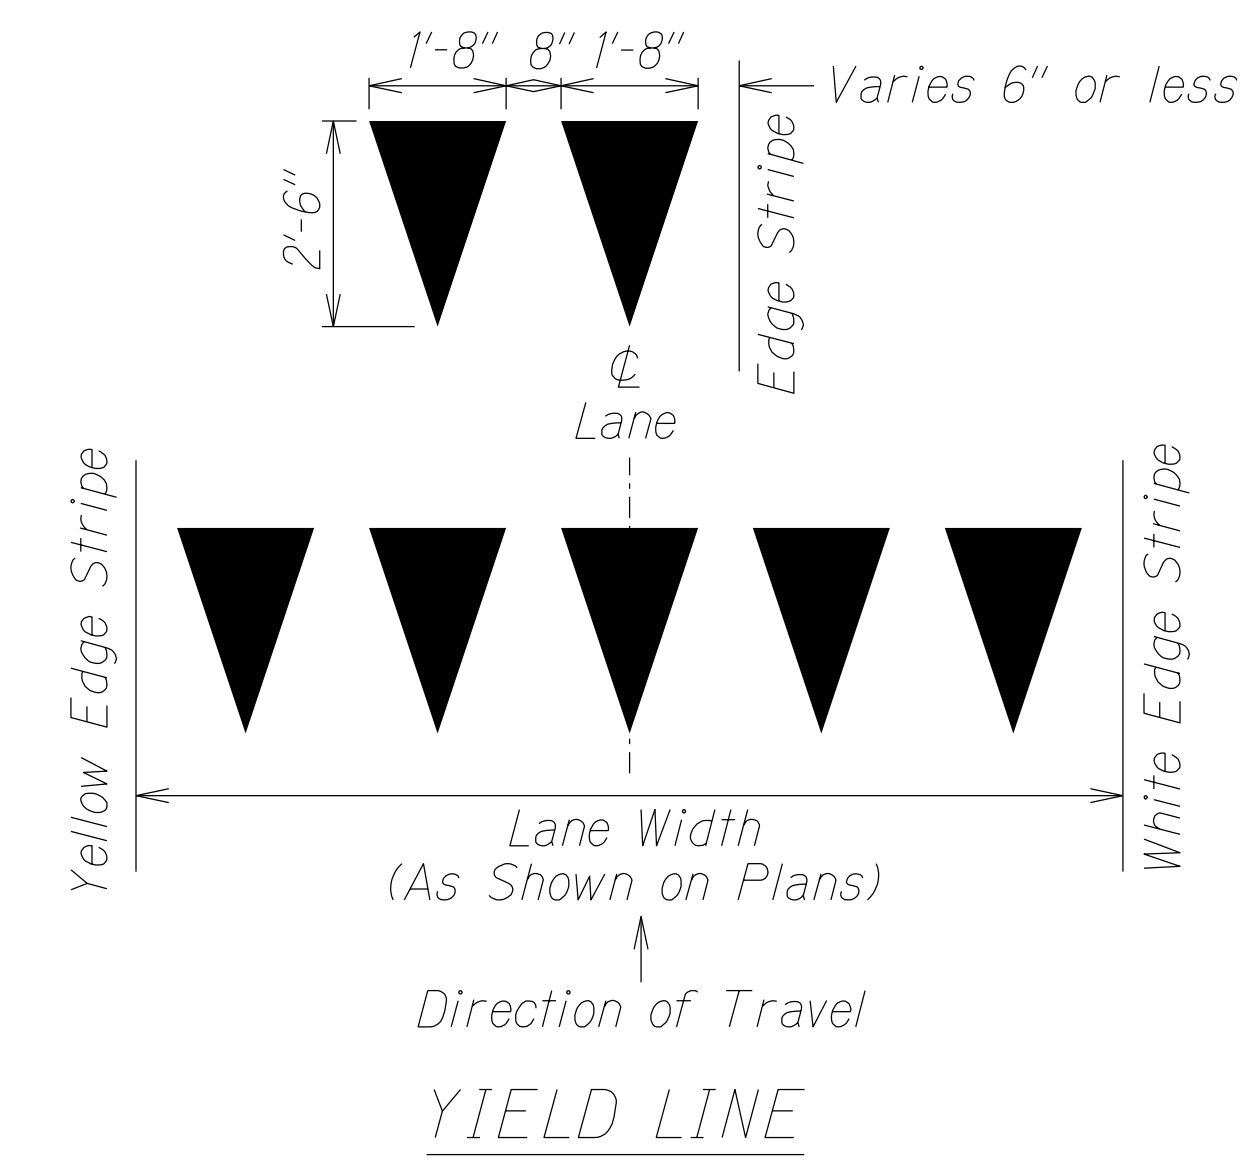

YIELD LINE

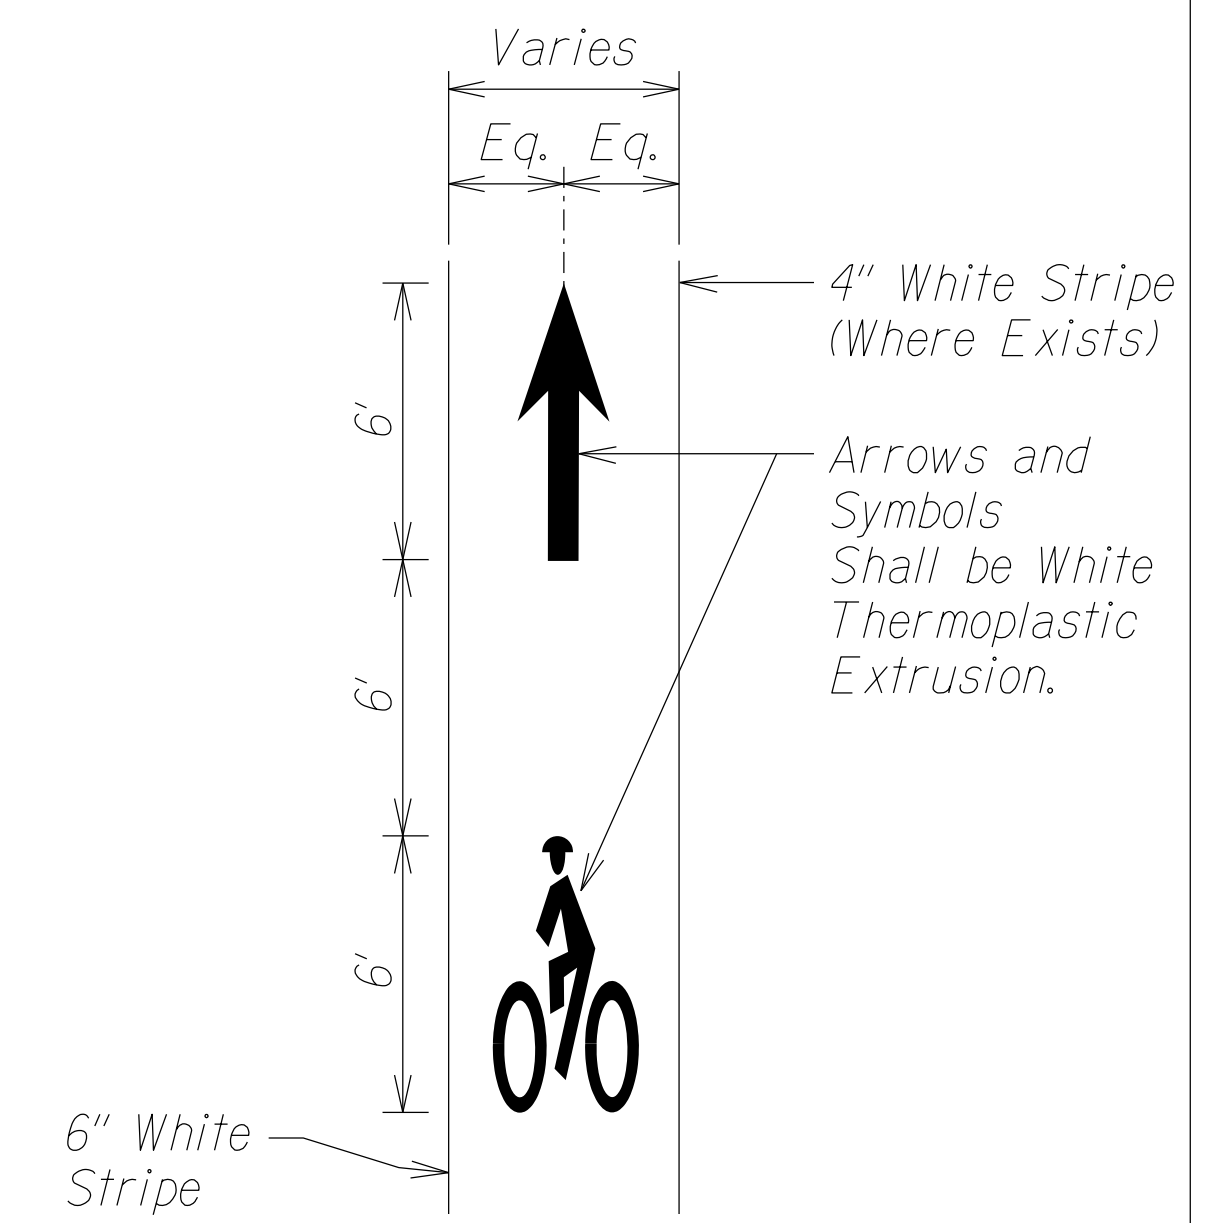

BIKE LANE PAVEMENT MARKING DETAIL
Not to Scale

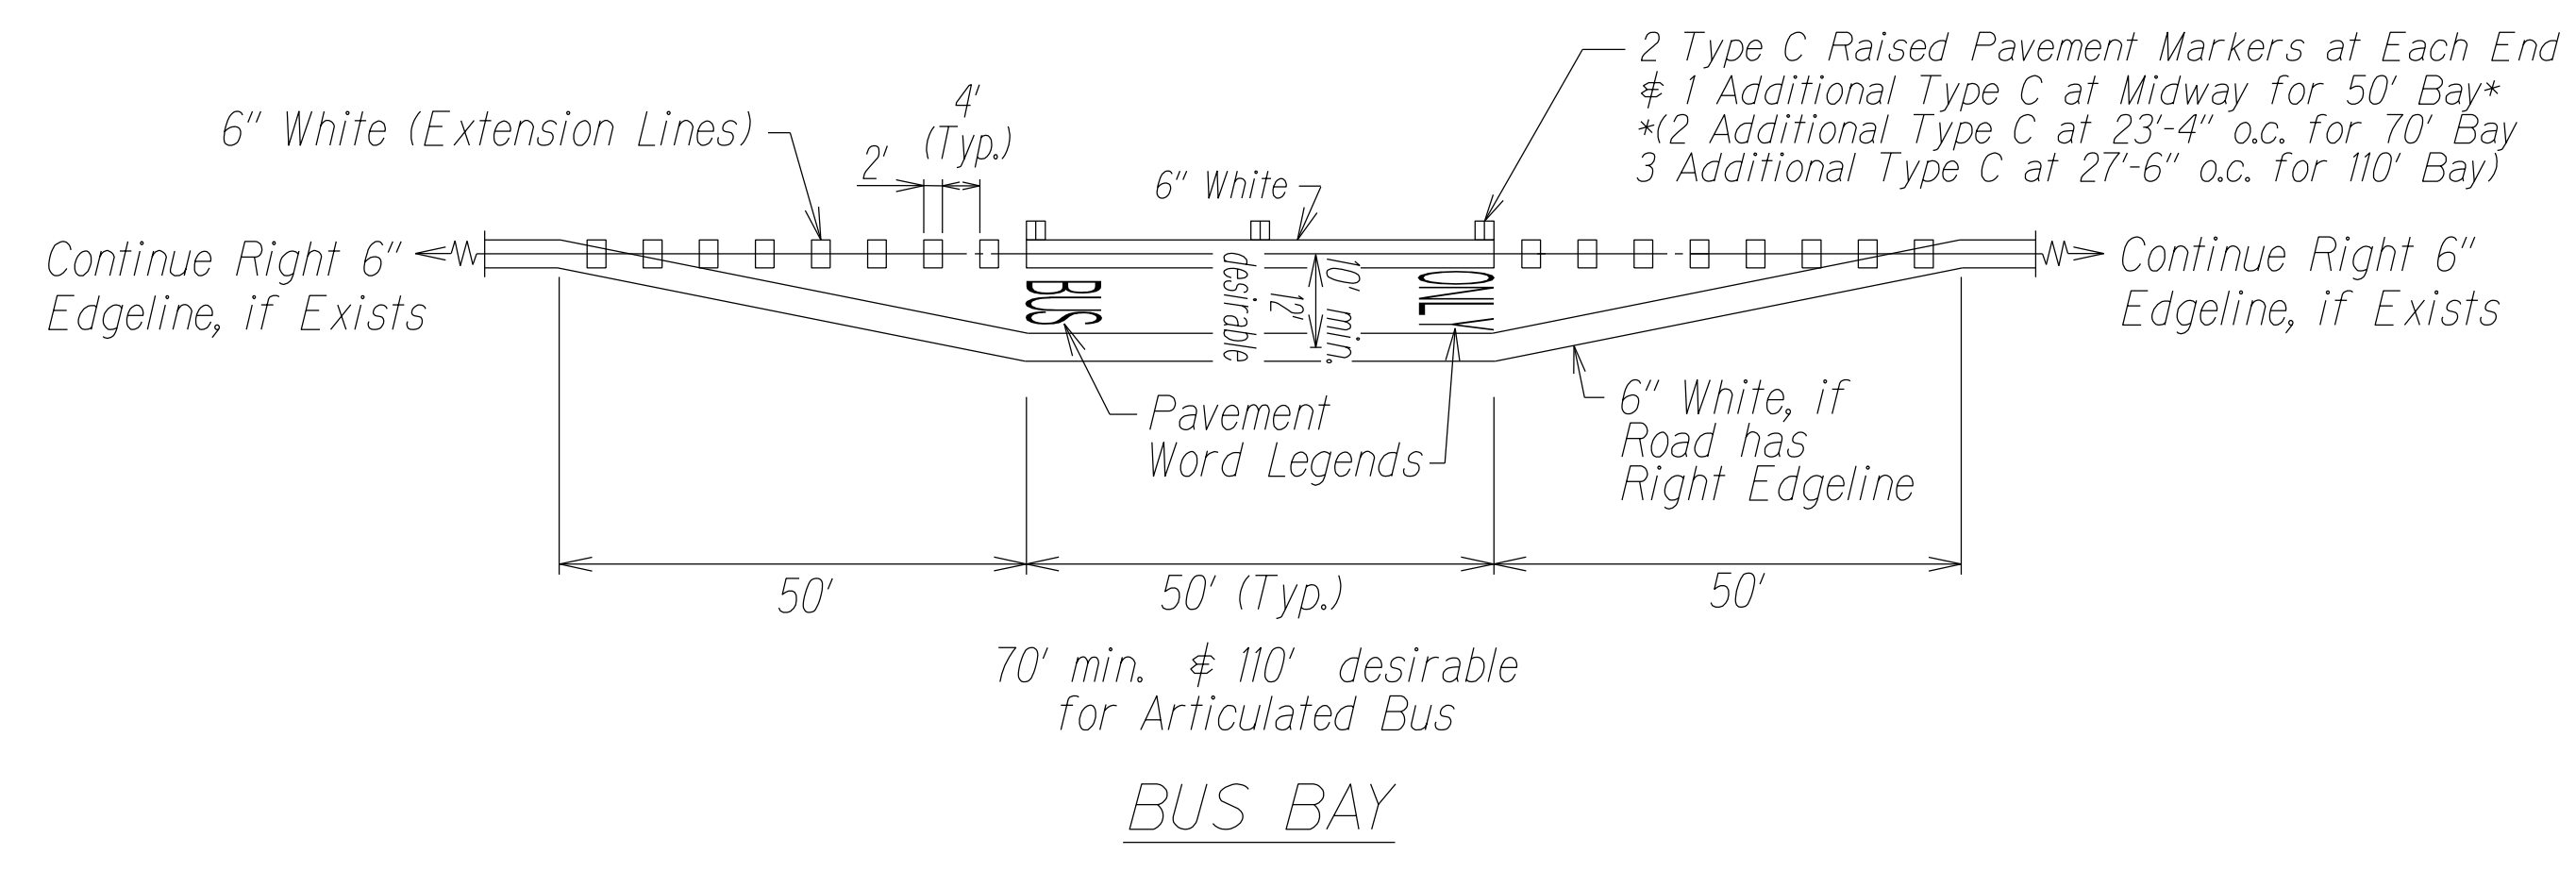

BUS BAY

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
DATE	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


**PAVEMENT MARKING LEGEND,
DETAILS & NOTES**

KAUAIILII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: As Noted Date: January 2022

SHEET No. T1 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	25	30

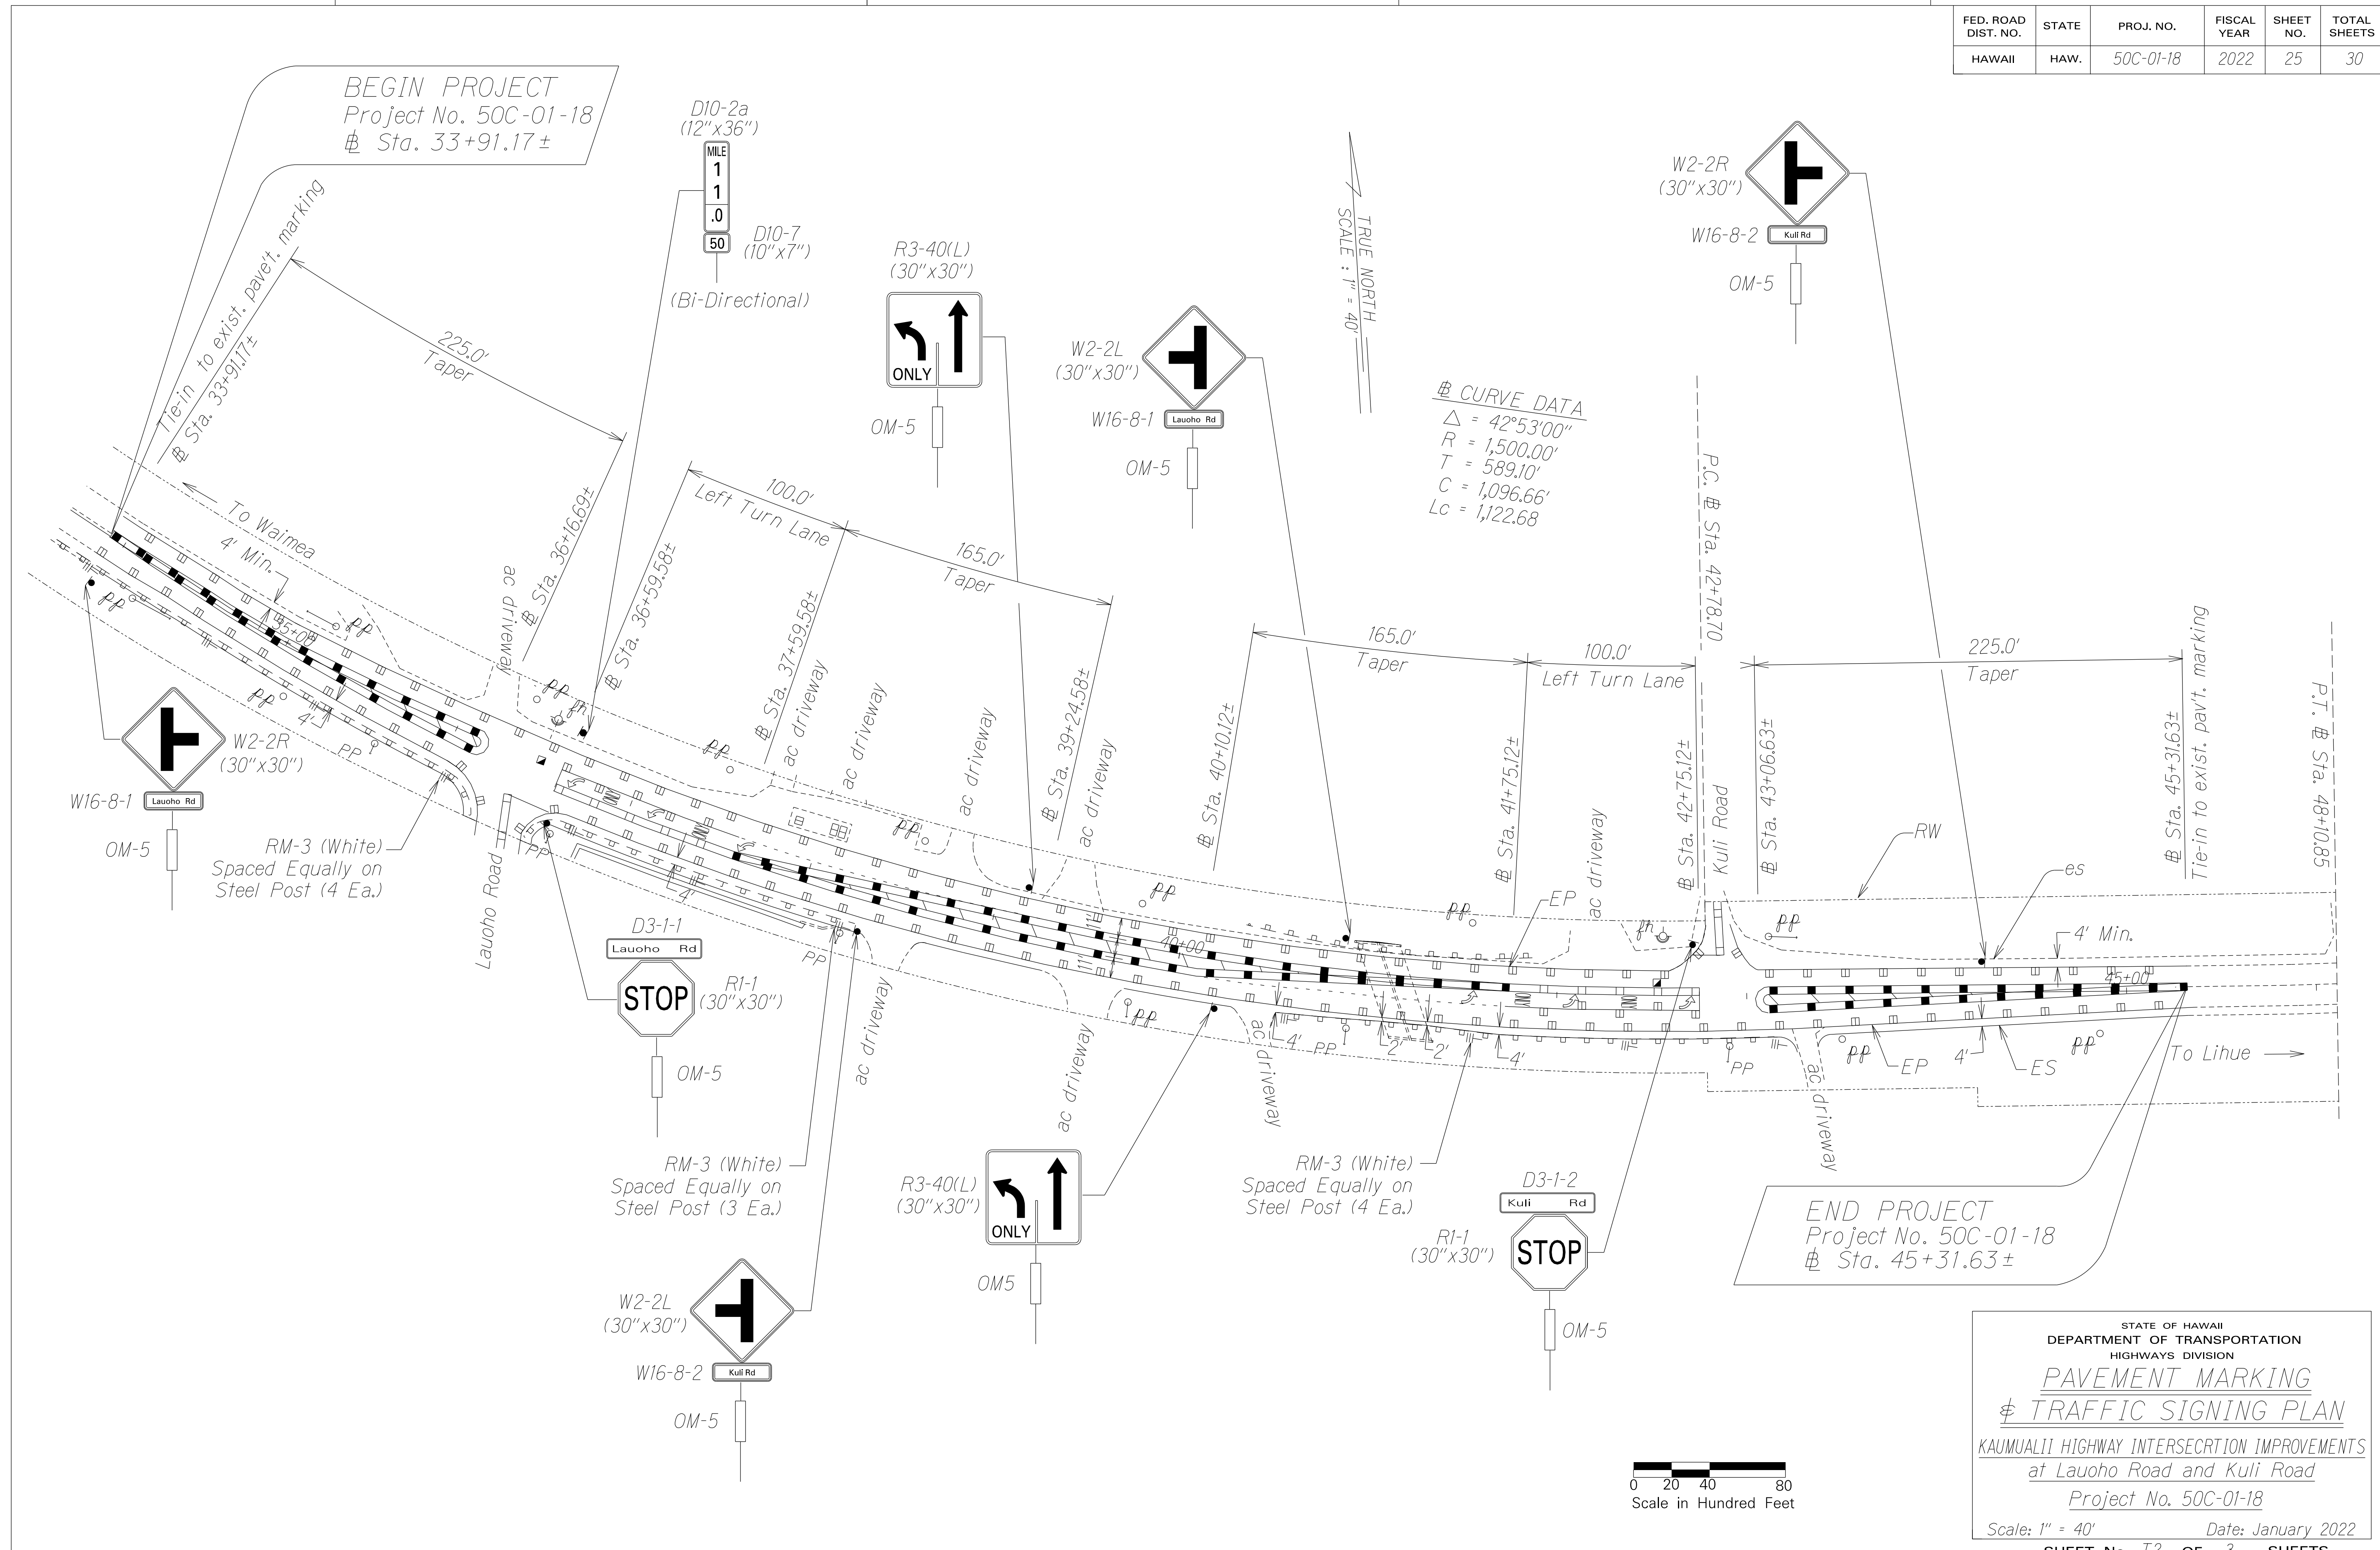

DATE	_____
SURVEY PLOTTED BY	_____
DRAWN BY	_____
DESIGNED BY	_____
QUANTITIES BY	_____
CHECKED BY	_____
ORIGINAL PLAN	_____
NOTE BOOK	_____
NO.	_____

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


**PAVEMENT MARKING
& TRAFFIC SIGNING PLAN**

KAUMUALII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18


Scale: 1" = 40' Date: January 2022

SHEET No. T2 OF 3 SHEETS


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	26	30

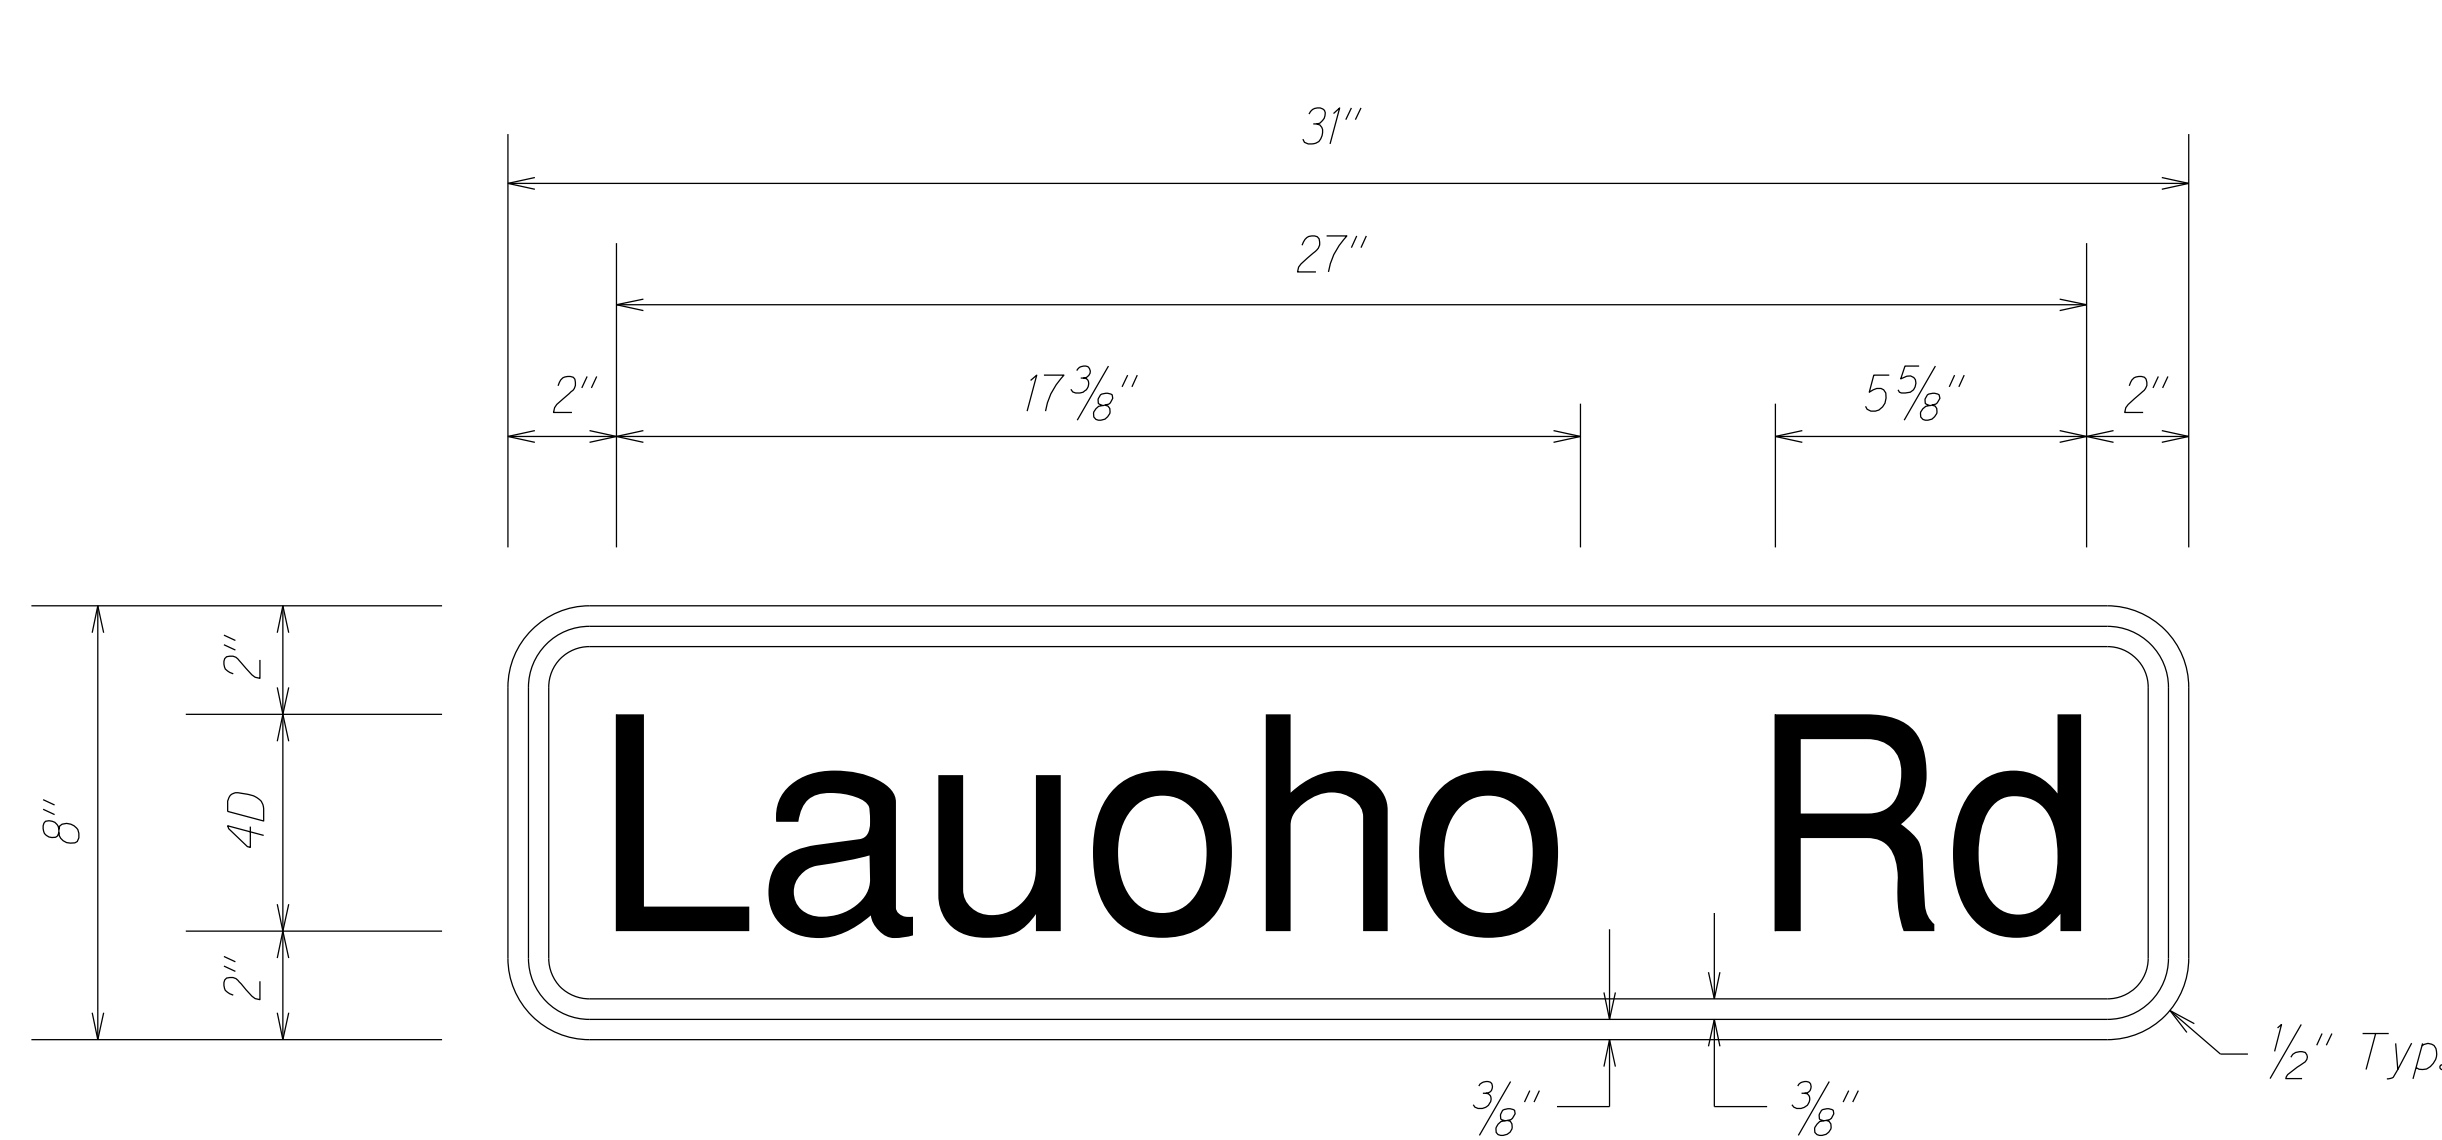

W16-8-1
Not to Scale

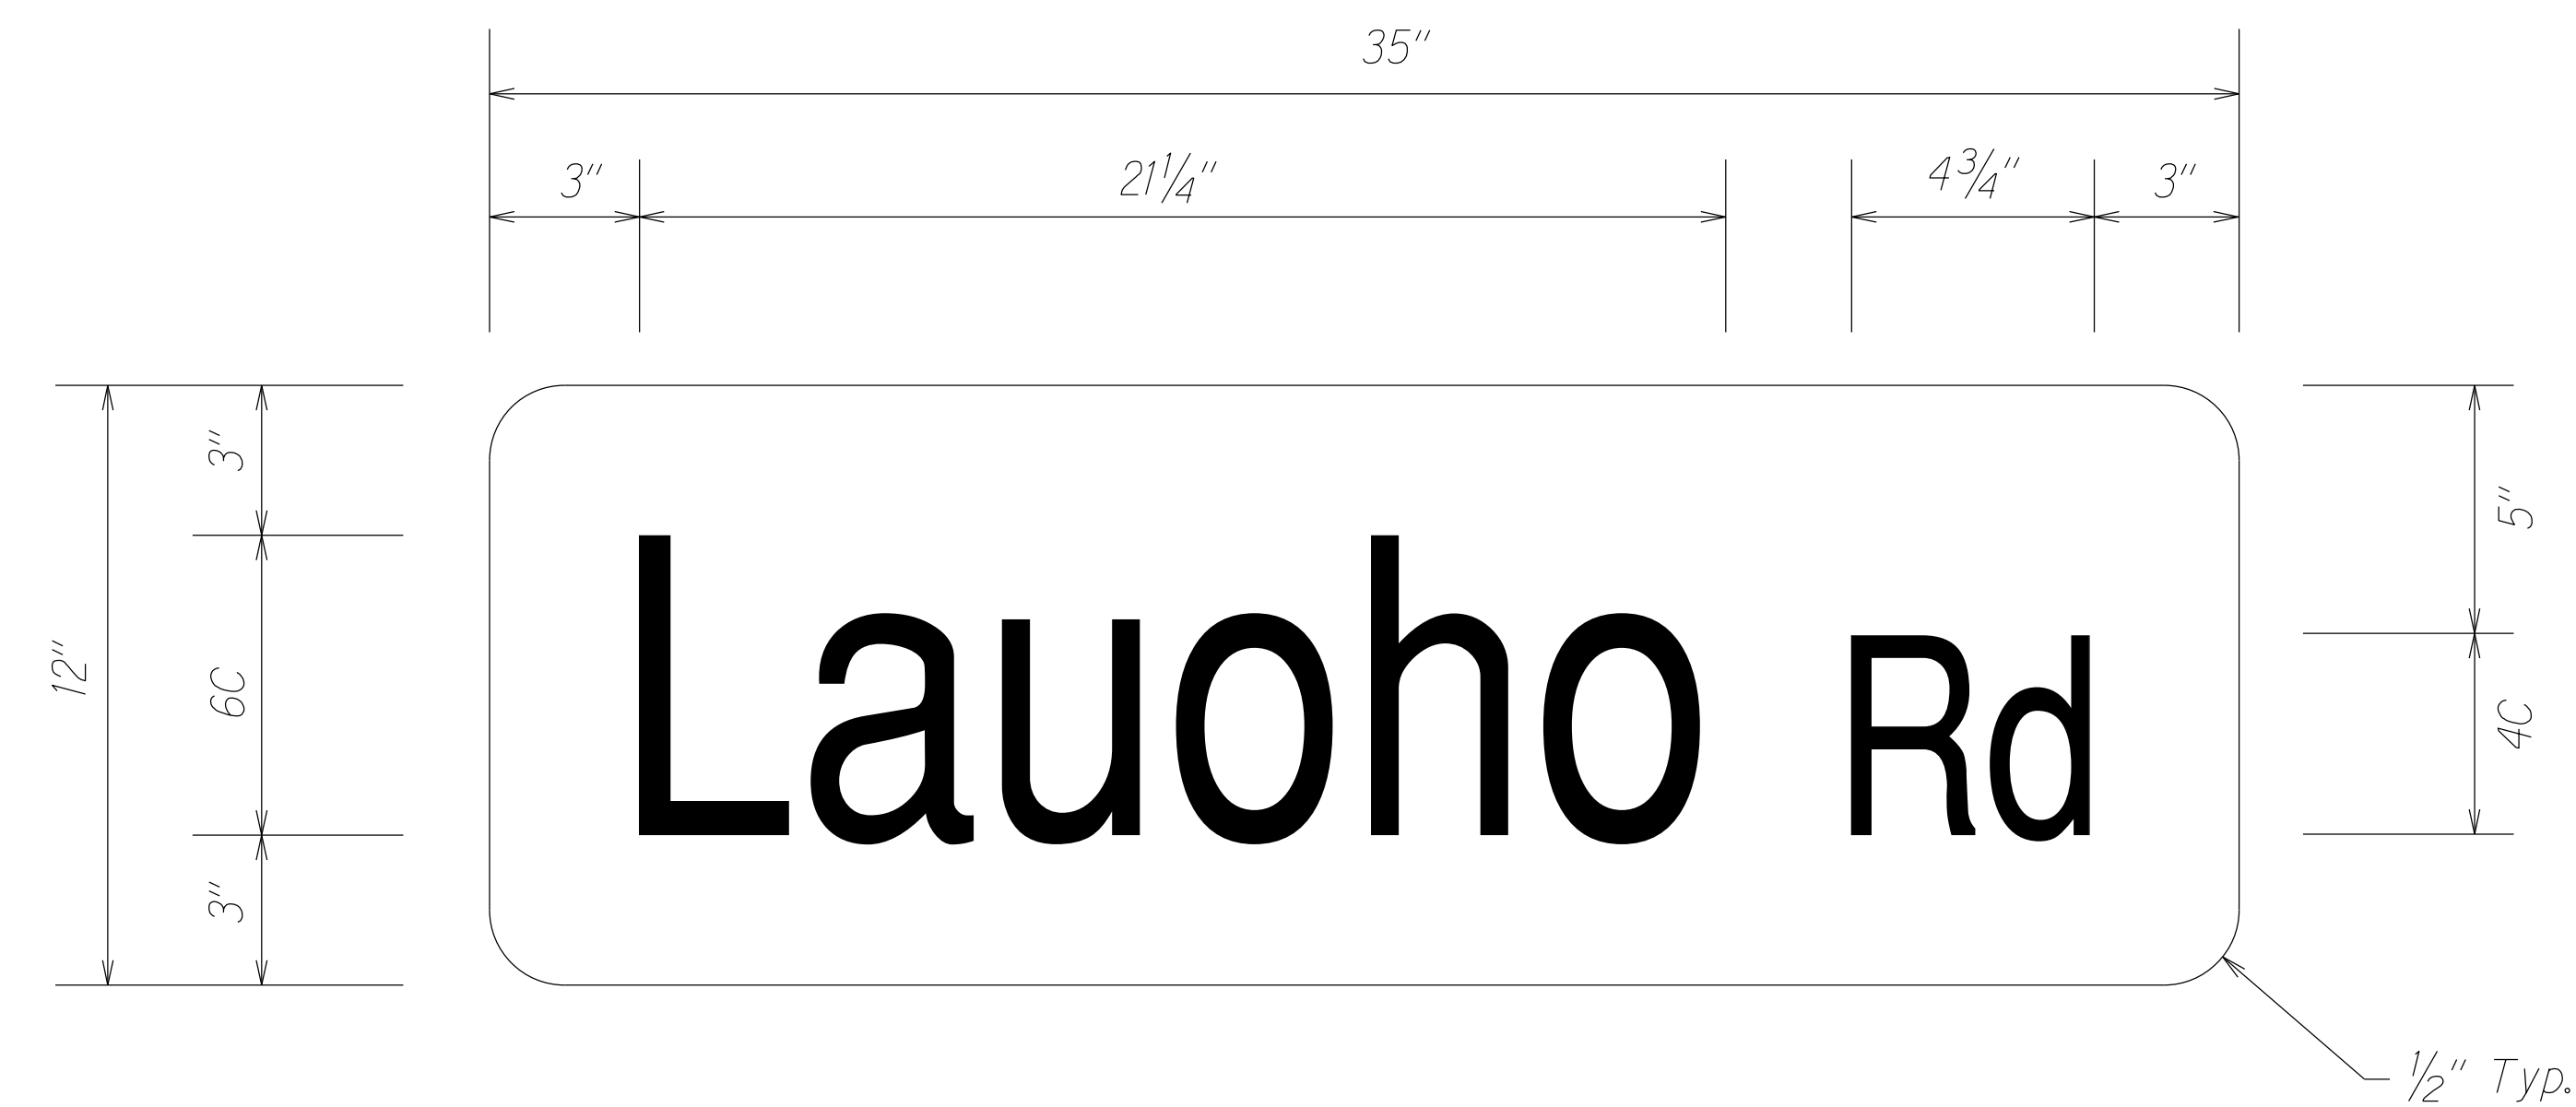

D3-1-1
Not to Scale

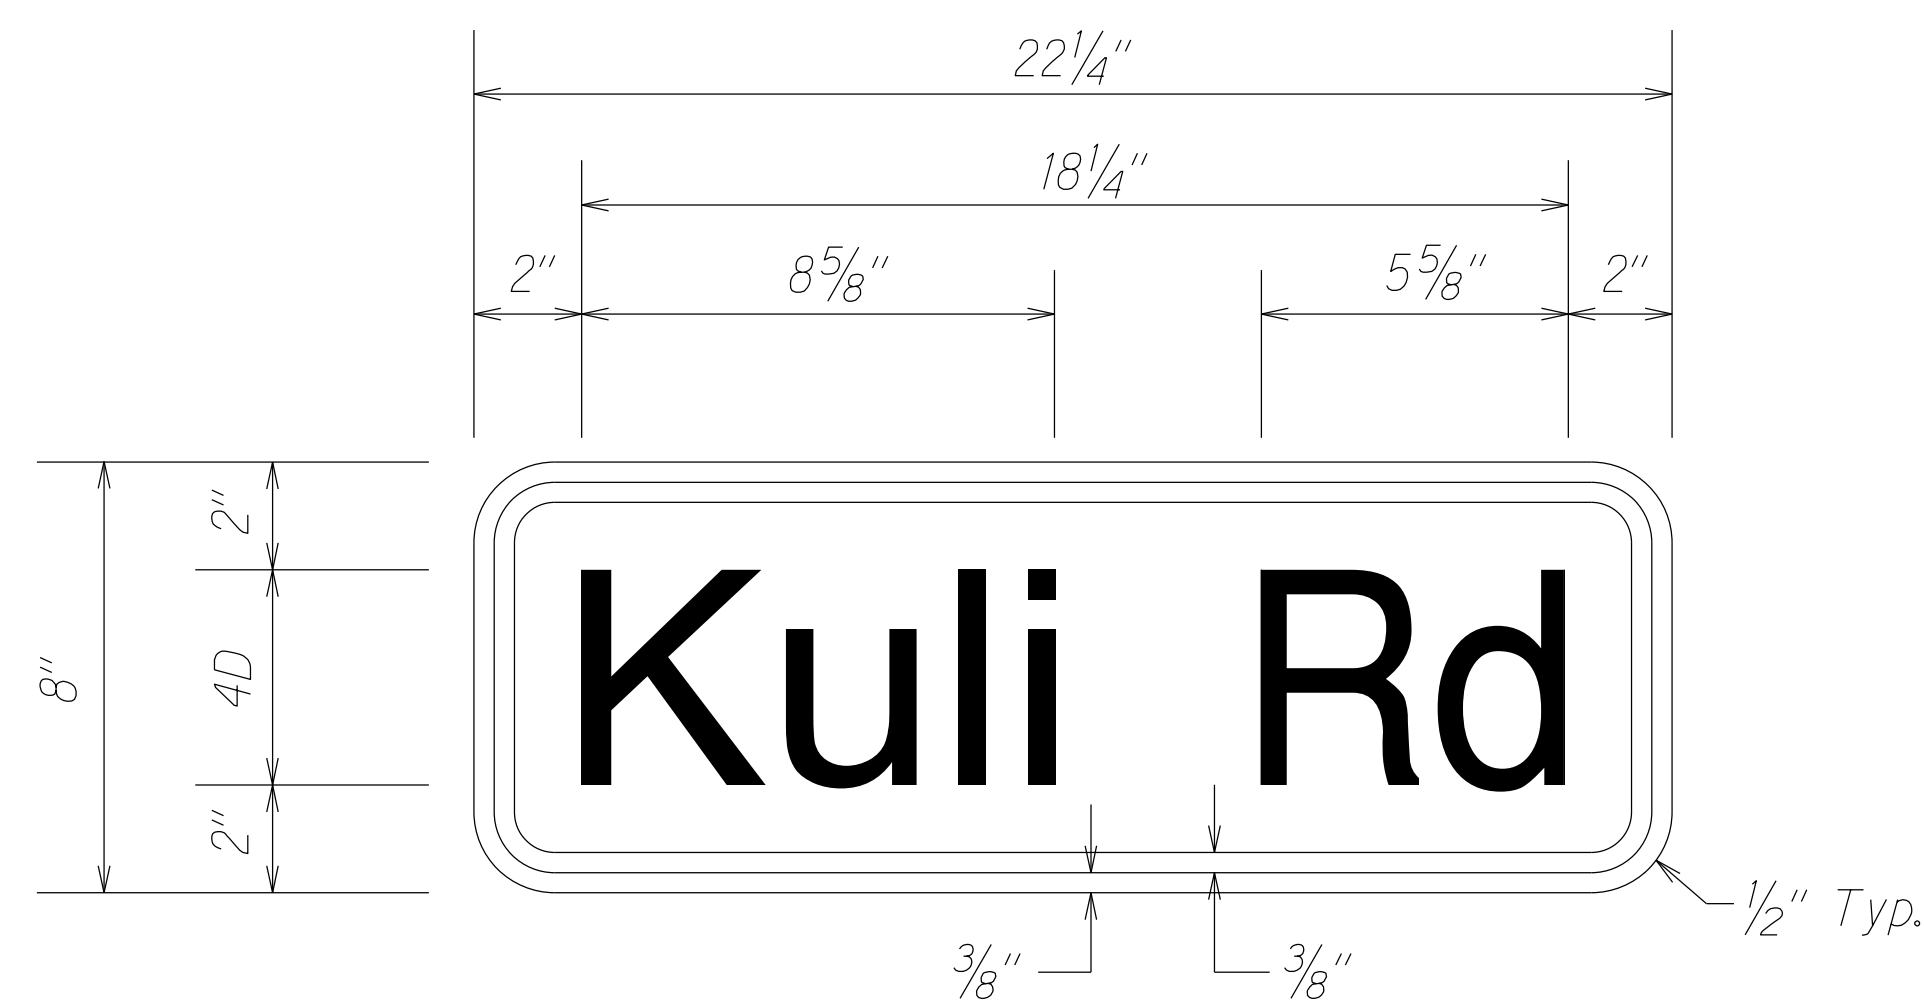

W16-8-2
Not to Scale



D3-1-2
Not to Scale

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DESIGNED BY	
QUANTITIES BY	CHECKED BY	
NO.		

Note: Street Name Sign shall be installed on top of stop sign (R1-1) and shall be made on both faces of the plate.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


SUPPLEMENTAL PLAQUE #
STREET NAME SIGN DETAIL

KAUAIJII HIGHWAY INTERSECTION IMPROVEMENTS
at Lauoho Road and Kuli Road
Project No. 50C-01-18

Scale: As Noted Date: January 2022


SHEET No. 3 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	27	30

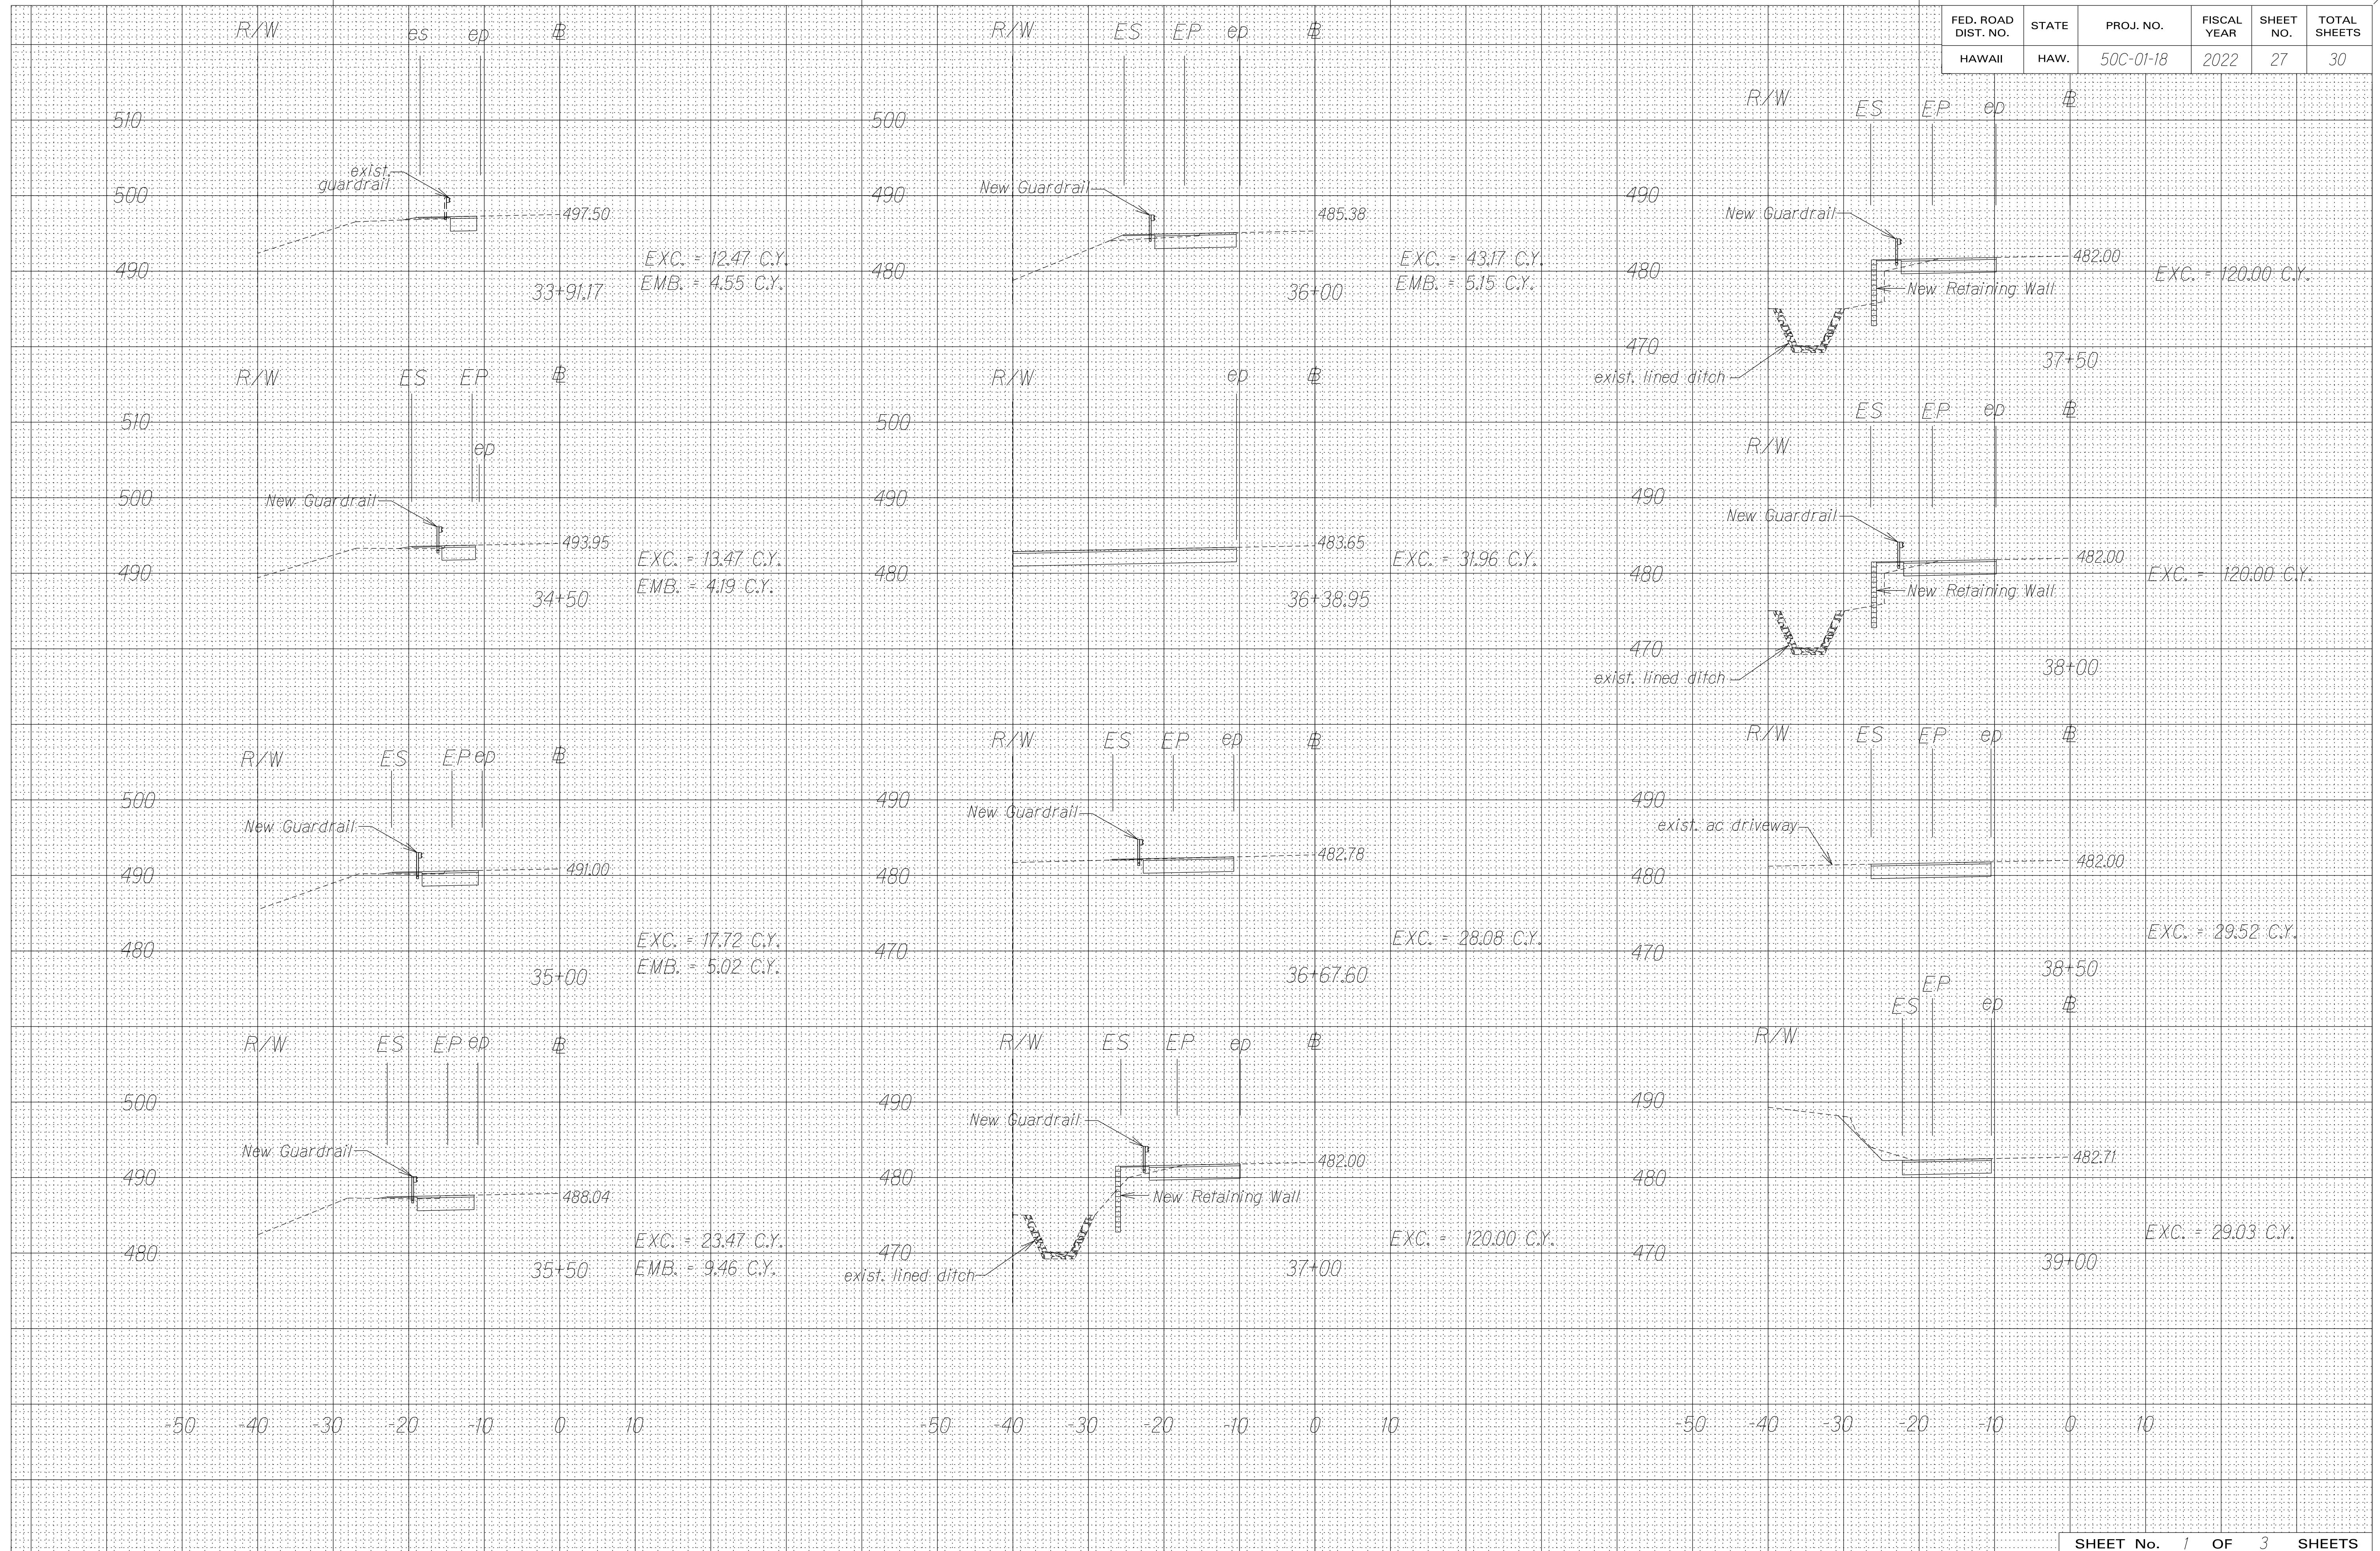






SURVEY PLOTTED BY _____ DATE _____
 DRAWN BY _____
 NOTE BOOK _____
 DESIGNED BY _____
 QUANTITIES BY _____
 CHECKED BY _____
 N₁

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	28	30

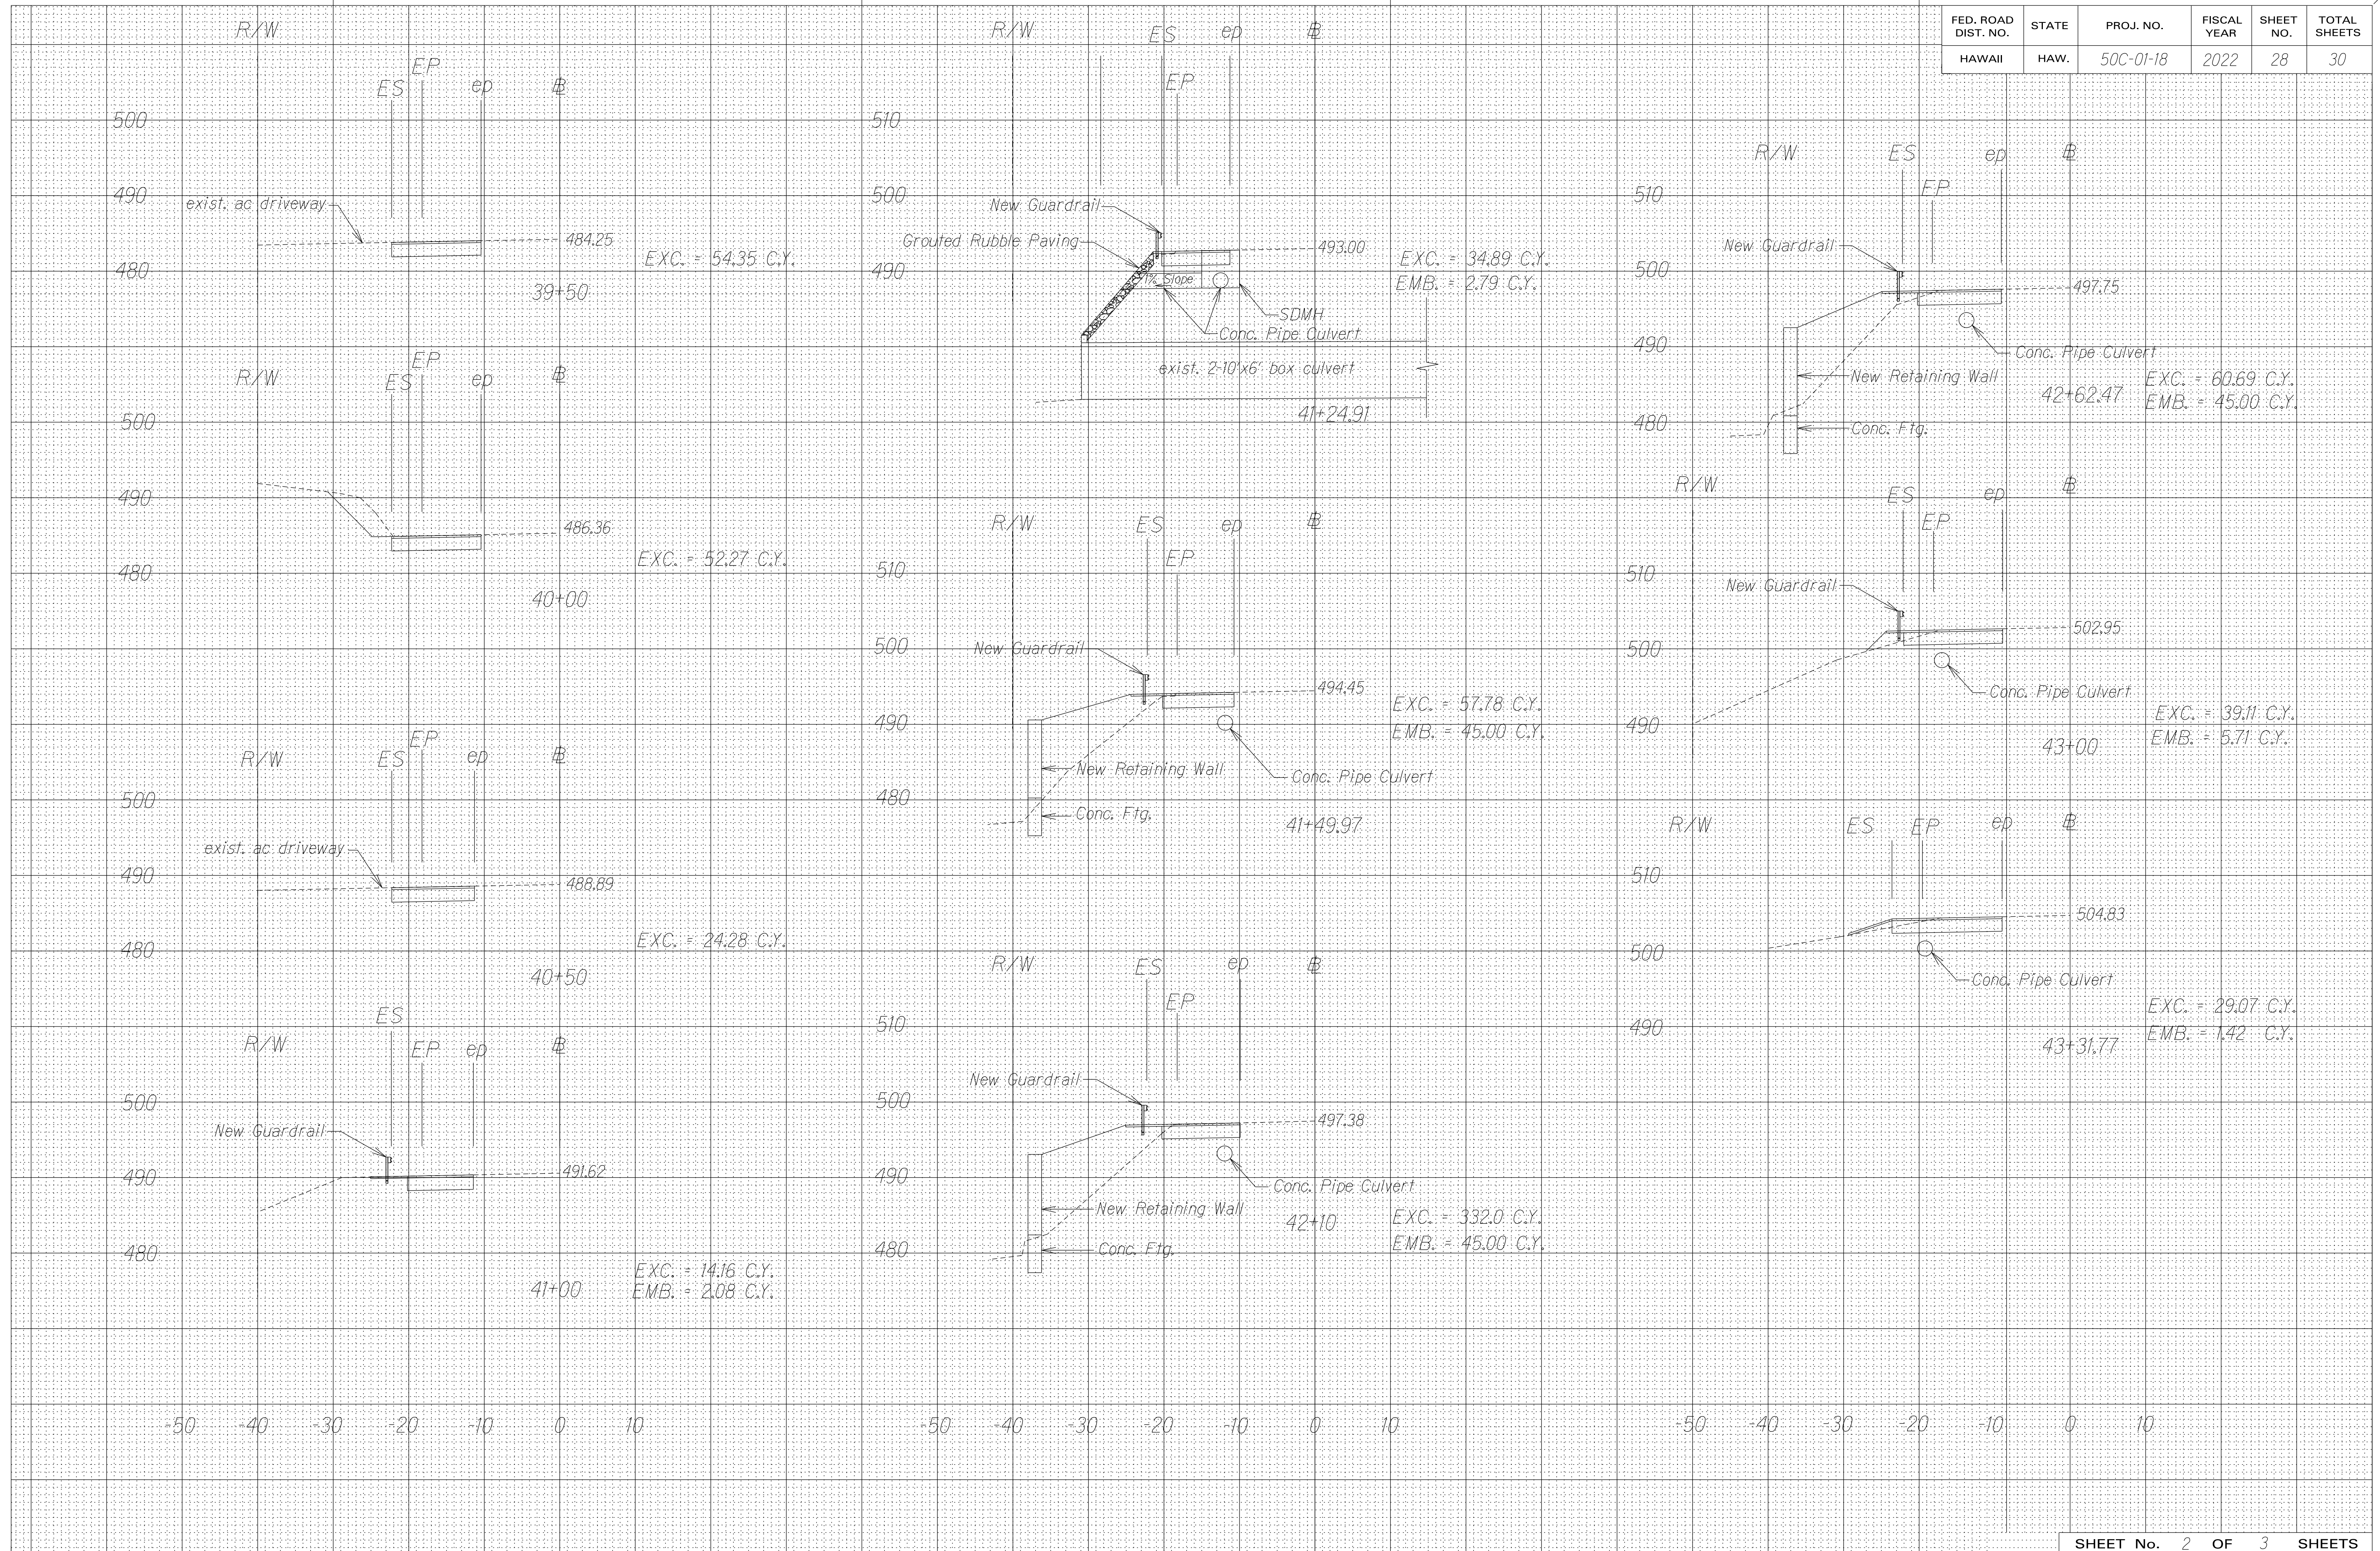

SURVEY PLOTTED BY _____ DATE _____
 DRAWN BY _____
 DESIGNED BY _____
 QUANTITIES BY _____
 CHECKED BY _____

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	50C-01-18	2022	29	30

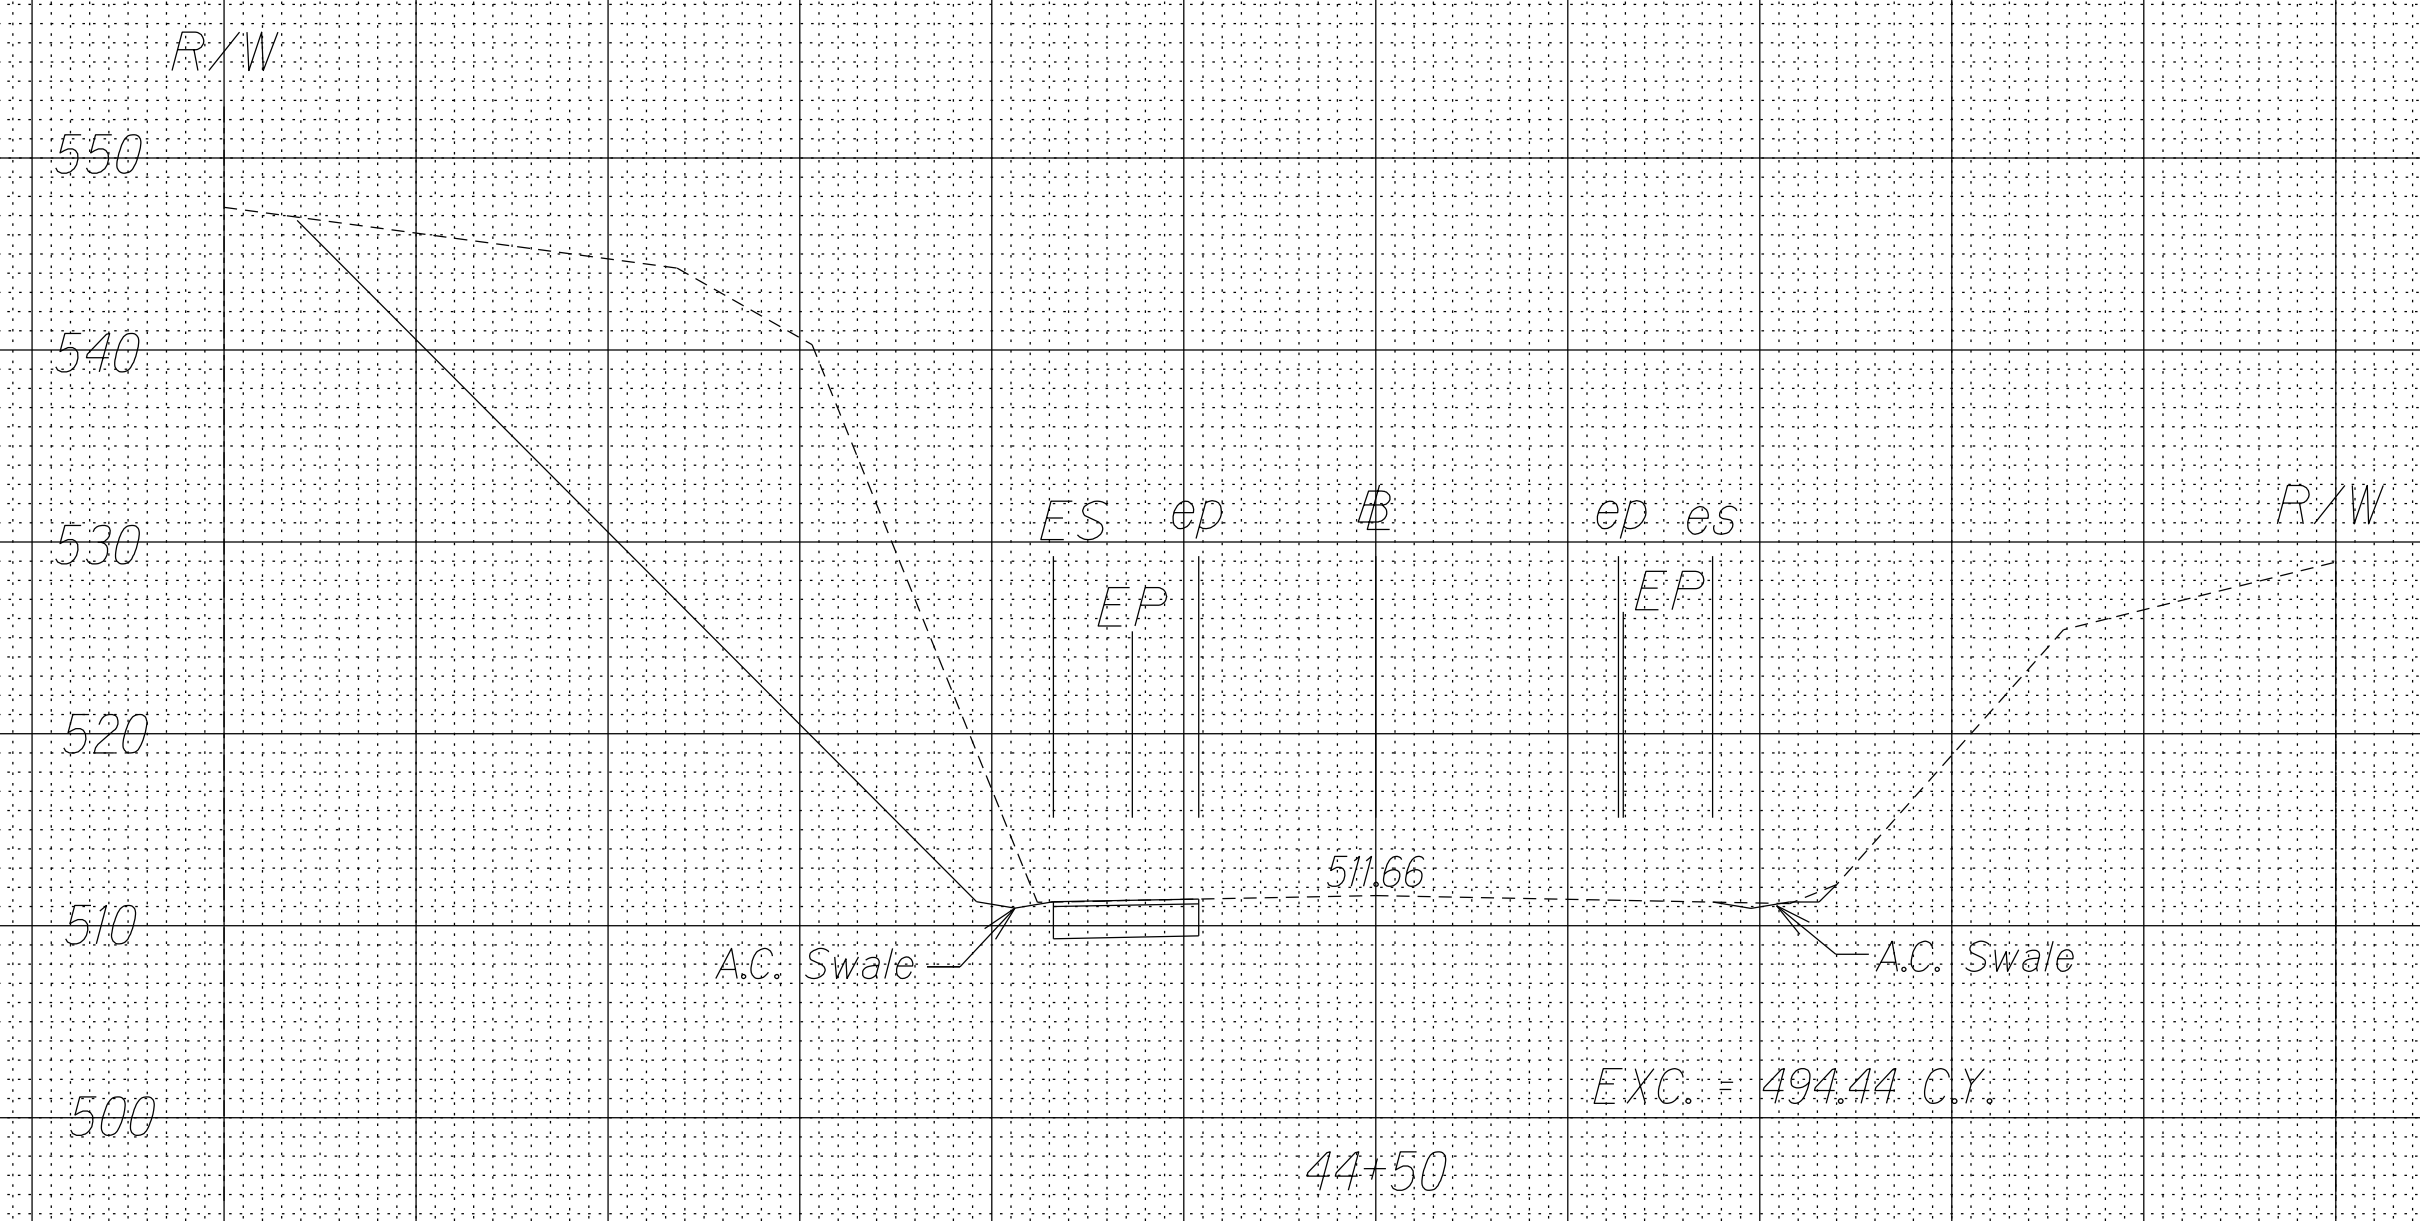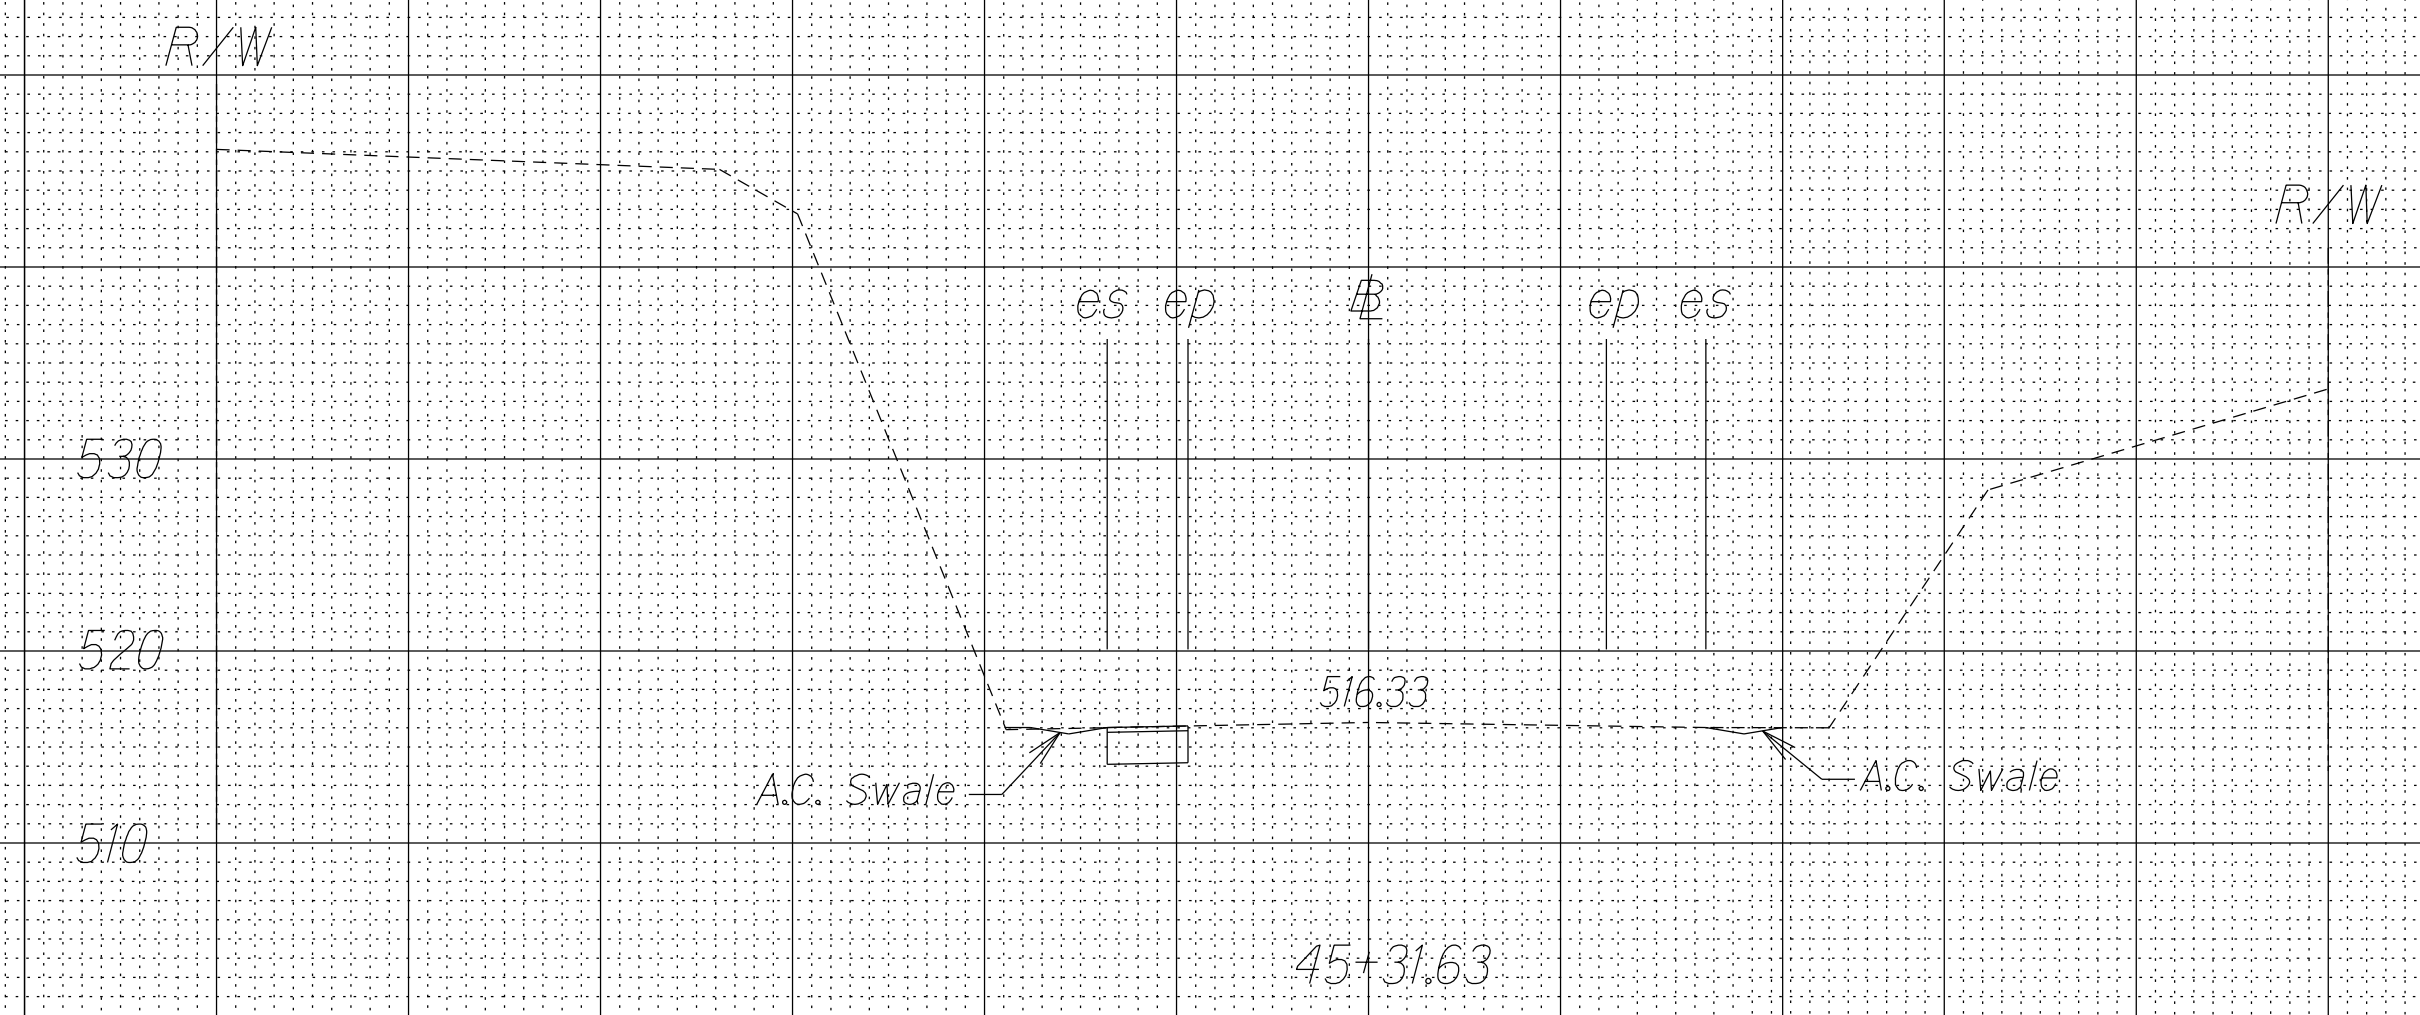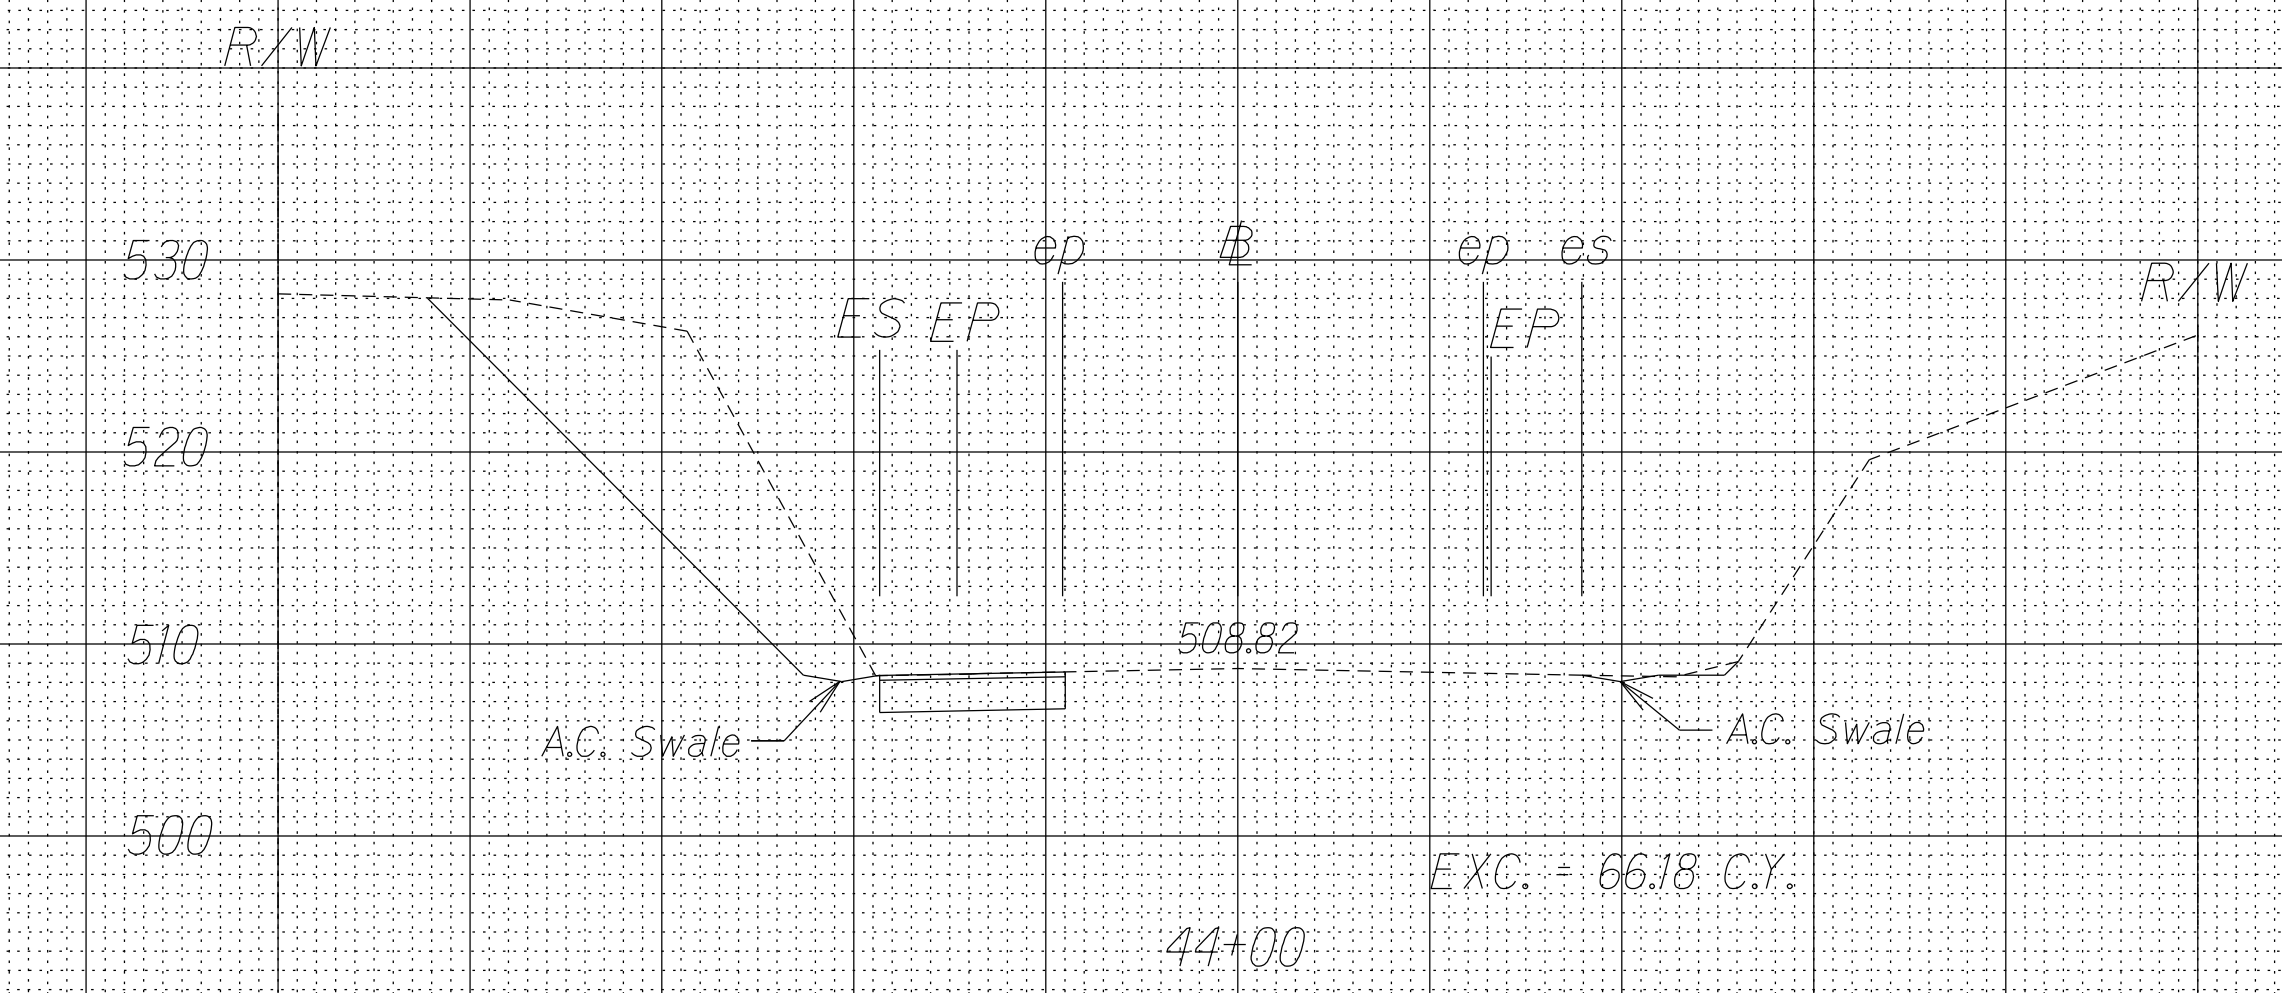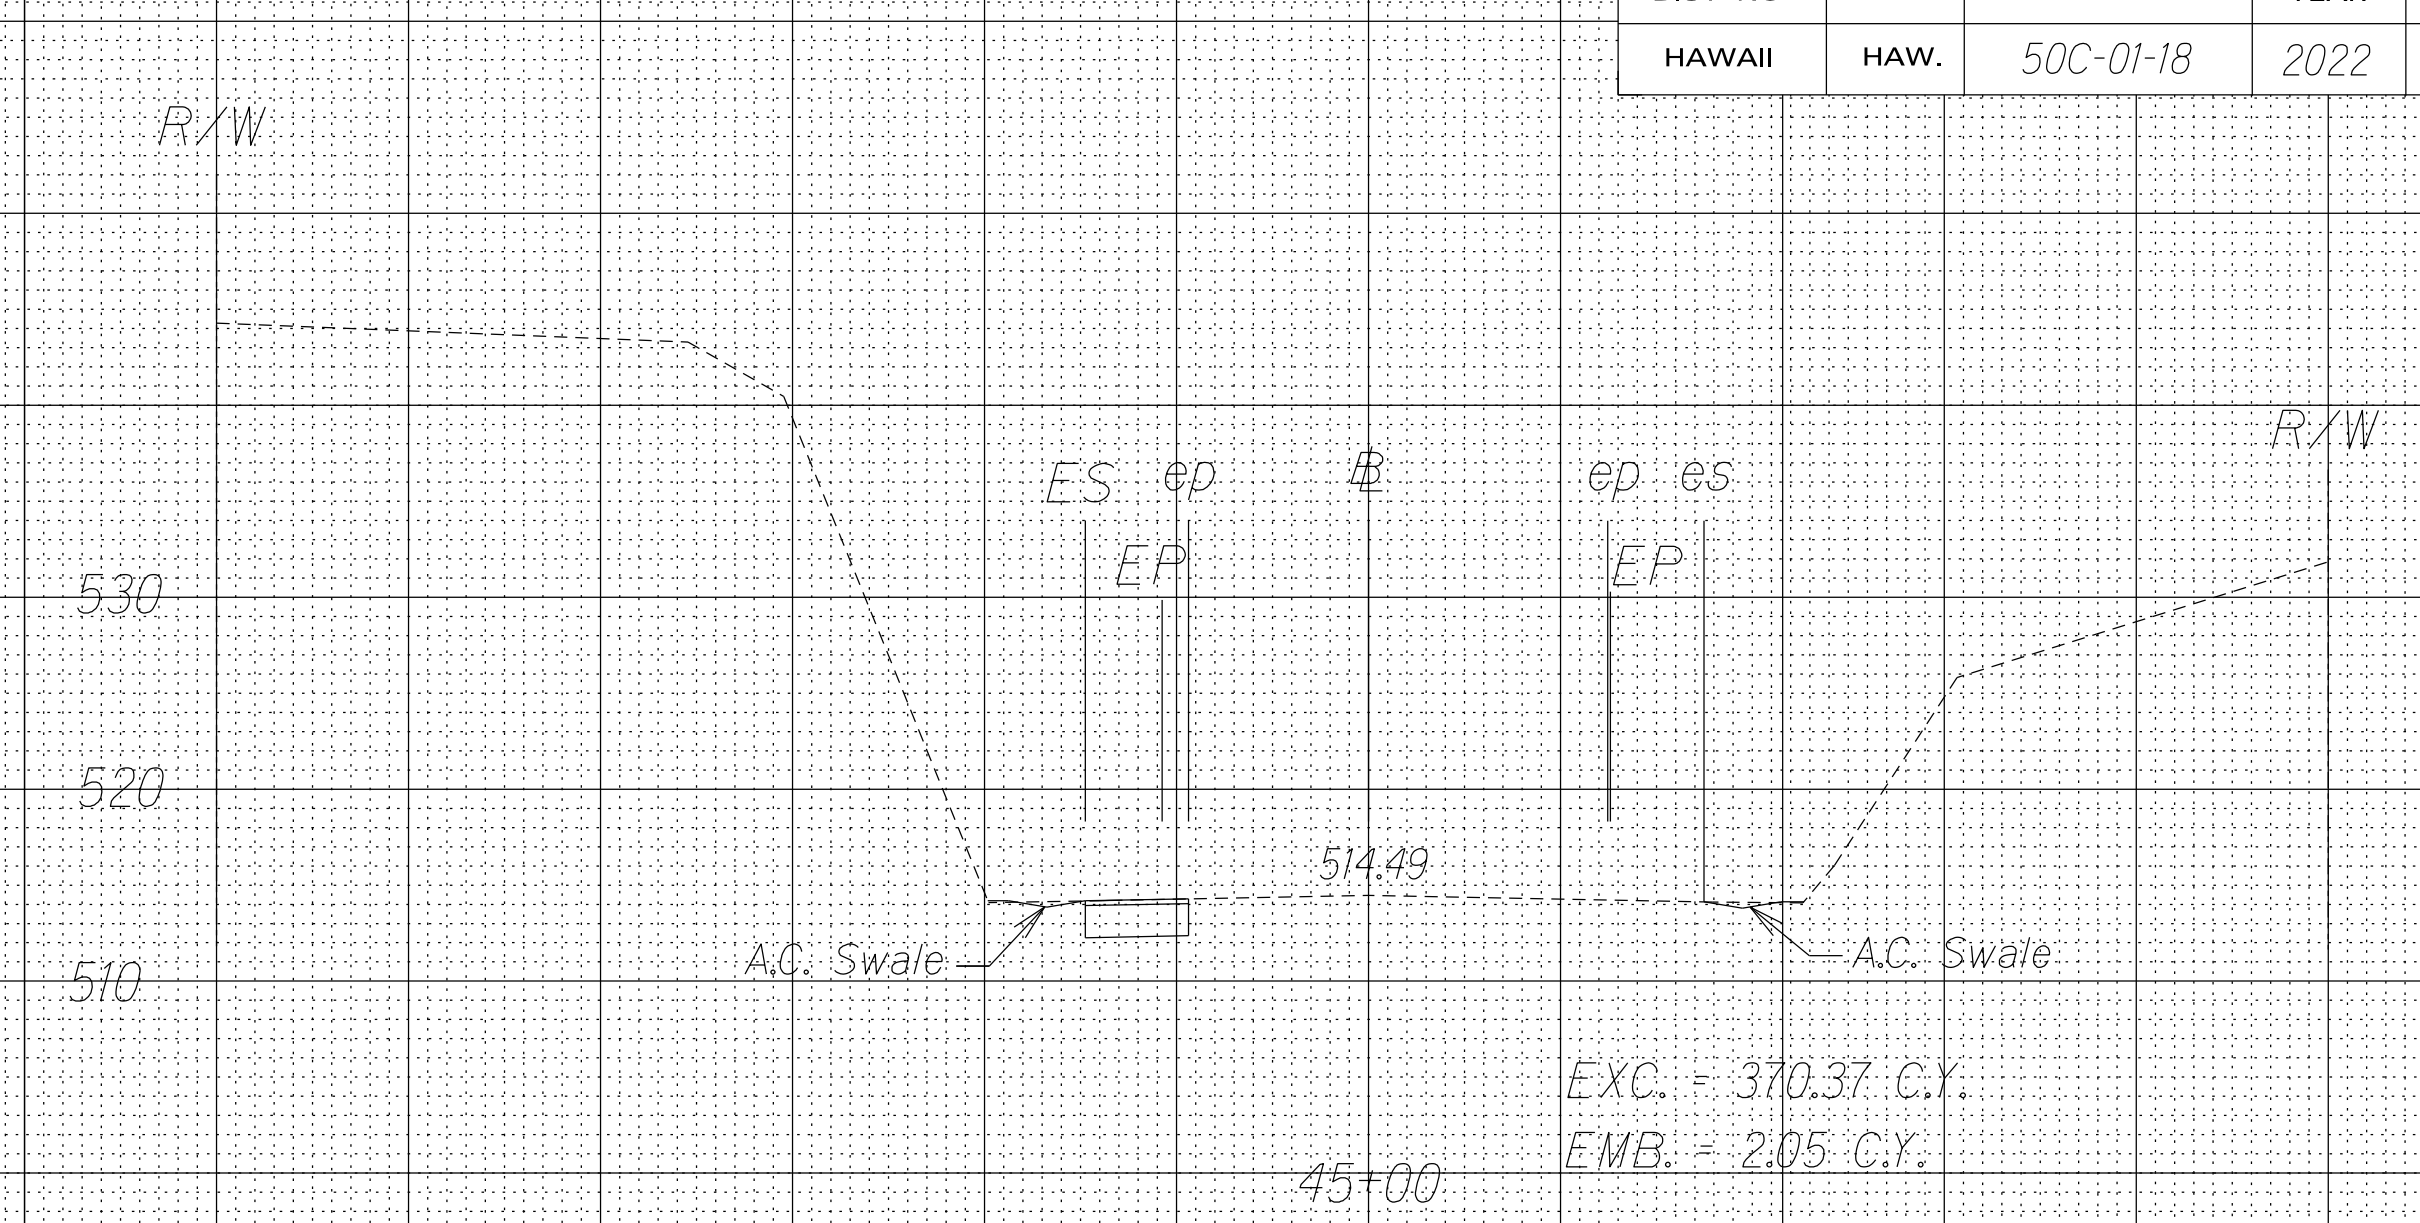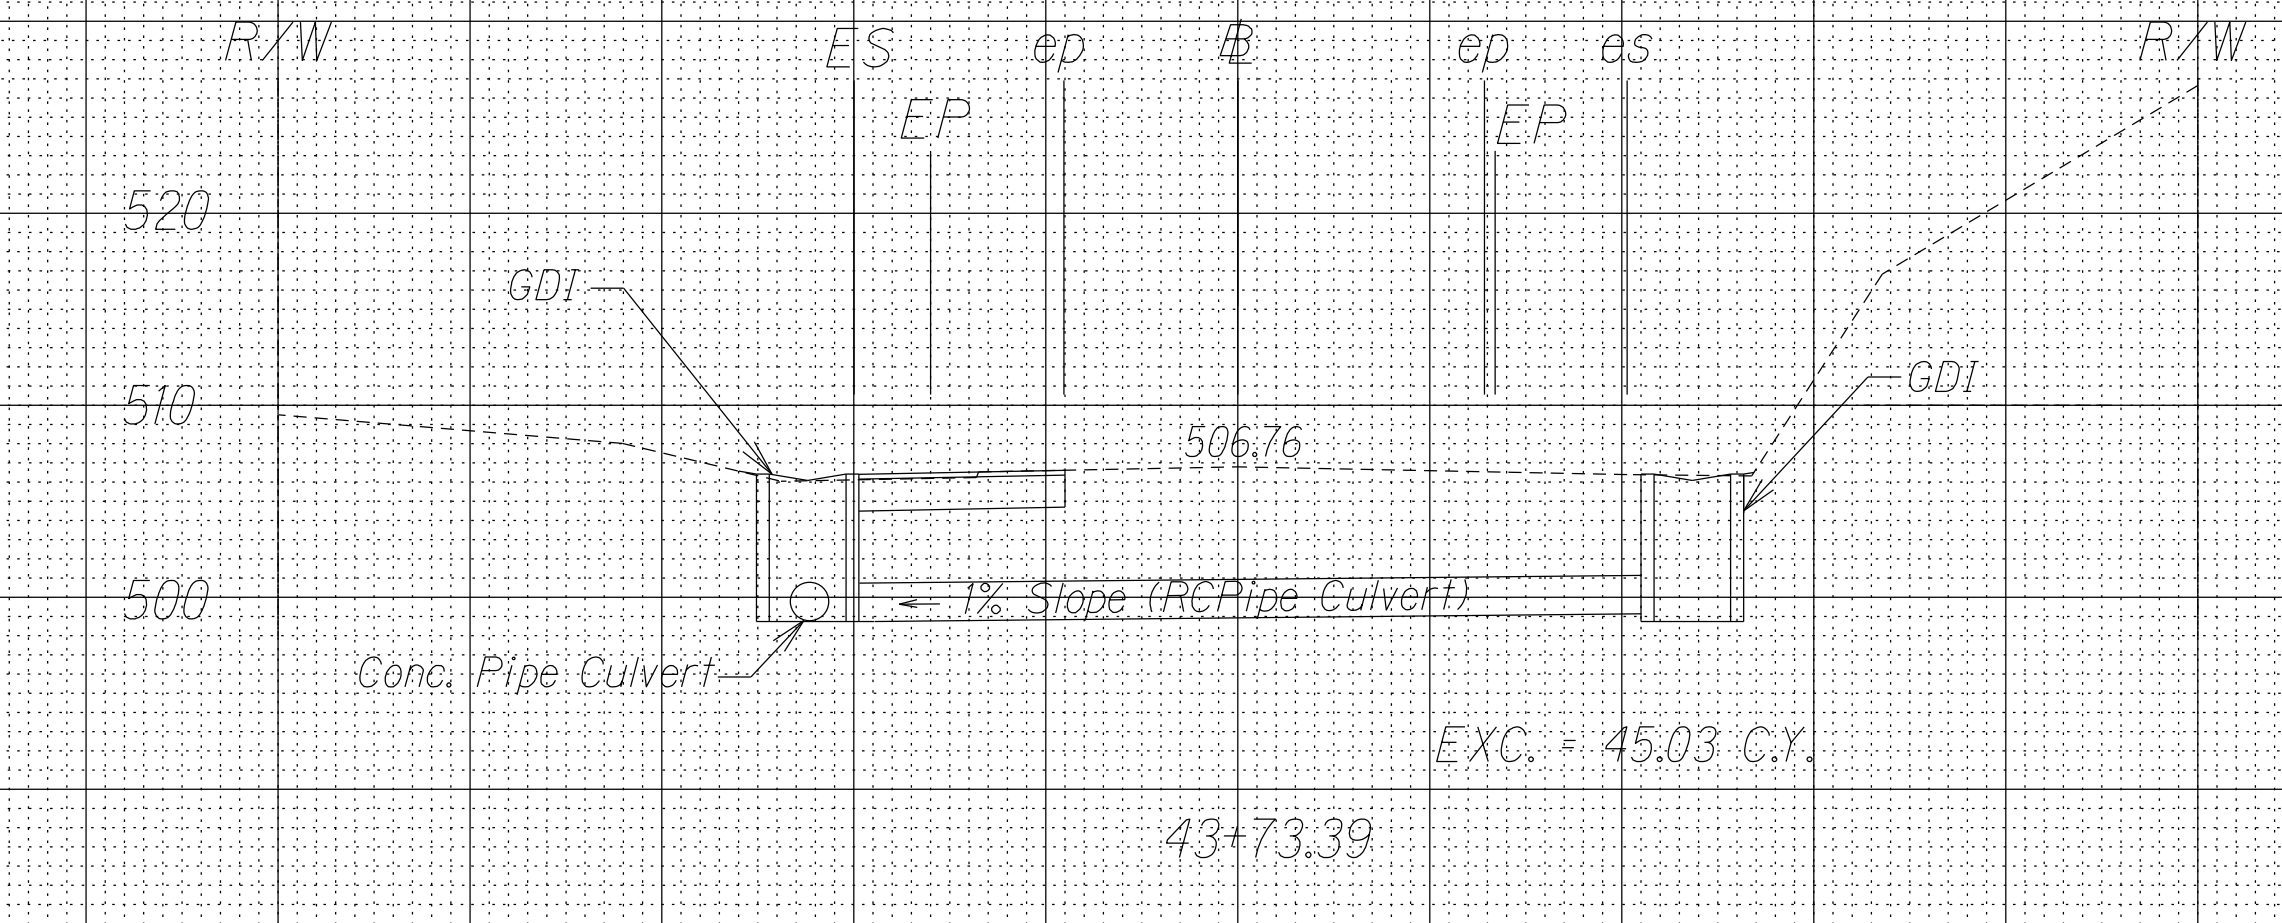

SURVEY PLOTTED BY _____ DATE _____
 DRAWN BY _____
 NOTE BOOK _____
 DESIGNED BY _____
 QUANTITIES BY _____
 CHECKED BY _____

