

SPECIFICATIONS AND PROPOSAL

FOR

FENDER REPAIRS AT

PIER 3, HILO HARBOR, HAWAII

JOB S50208

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HARBORS

NOTICE TO BIDDERS
(Chapter 103D, Hawaii Revised Statutes)

The receiving of SEALED BIDS for FENDER REPAIRS AT PIER 3, HILO HARBOR, HAWAII - JOB S50208, will begin as advertised in HiePRO. Bidders are to register and submit bids through HiePRO only. See the following HiePRO link for important information on registering: <https://hiepro.ehawaii.gov/welcome.html>.

Plans, specifications, proposal, contract forms, and any other applicable documents may be obtained from HiePRO.

Deadline to submit bids is June 9, 2023, at 2:00 p.m. Hawaii Standard Time (HST). Bids received after said due date and time shall not be considered.

The scope of work consists of repairing existing concrete haunches and tire fender system including tire fenders, lagging, wales, blocking, bolts, grommets, chains, hardware, and other appurtenances for the entire Pier 3 at Hilo Harbor. The estimated cost of construction is between \$750,000 and \$850,000.

To be eligible for award, bidders must possess a valid State of Hawaii General Engineering Contractor's "A" license at the time of bidding.

The GENERAL PROVISIONS dated 2016 applicable to this project are available on the internet at <http://hidot.hawaii.gov/administration/con/>.

A pre-bid meeting is scheduled for May 19, 2023, at 9:00 a.m. HST. All prospective bidders or their representatives (employees) are encouraged to attend, but attendance is not mandatory. The pre-bid meeting will be conducted on Microsoft Teams. Contact Mr. James Miller, Harbors Project Manager, by phone at (808) 587-1871 or email at James.B.Miller@hawaii.gov, a minimum of 24 hours prior to the scheduled pre-bid meeting to receive the Teams meeting invitation. Anything said at the meeting is for clarification purposes and any changes to the bid documents will be made by addendum and posted in HiePRO.

All questions and requests for information (RFI) applicable to the bid documents shall be submitted via HiePRO no later than 14 calendar days before bid opening. Questions received after the deadline will not be addressed. Verbal RFI will not receive a response.

Apprenticeship Preference. A 5% bid adjustment for bidders that are parties to apprenticeship agreements pursuant to §103-55.6, Hawaii Revised Statutes (HRS), is applicable to this project.

Employment of State Residents on Construction Procurement Contracts. Compliance with §103B-3, HRS, is a requirement for this project whereby a minimum of 80% of the bidder's work force on this project **must** consist of Hawaii residents.

Campaign Contributions by State and County Contractors. Contractors are hereby notified of the applicability of §11-355, HRS, which states that campaign contributions are prohibited from specified State or County government contractors during the term of the contract if the contractors are paid with funds appropriated by a legislative body. For more information, contact the Campaign Spending Commission at (808) 586-0285.

Protests. Any protest of this solicitation shall be submitted in writing to the Director of Transportation, in accordance with §103D-701, HRS, and §3-126, Hawaii Administrative Rules.

The Equal Employment Opportunity Regulations of the Secretary of Labor implementing Executive Order 11246, as amended, shall be complied with on this project.

The U.S. Department of Transportation Regulation entitled "Nondiscrimination in Federally-Assisted Programs of the U.S. Department of Transportation," Title 49, Code of Federal Regulations (CFR), Part 21, is applicable to this project. Bidders are hereby notified that the State Department of Transportation will affirmatively ensure that the contract entered into pursuant to this advertisement will be awarded to the lowest responsible bidder without discrimination on the grounds of race, color, national origin or sex (as directed by 23 CFR, Part 200).

For additional information, contact Mr. Miller as noted above.

The State reserves the right to reject any or all proposals and to waive any defects in said proposals for the best interest of the public.



DREANALEE K. KALILI
Deputy Director
Department of Transportation, Harbors

Posted in HlePRO: May 9, 2023

INSTRUCTIONS FOR CONTRACTOR'S LICENSING

"A" general engineering contractors and "B" general building contractors are reminded that due to the Hawaii Supreme Court's January 28, 2002 decision in Okada Trucking Co., Ltd. v. Board of Water Supply, et al., 97 Haw. 450 (2002), they are prohibited from undertaking any work, solely or as part of a larger project, which would require the general contractor to act as a specialty contractor in any area where the general contractor has no license. Although the "A" and "B" contractor may still bid on and act as the "prime" contractor on an "A" or "B" project (*See, HRS § 444-7 for the definitions of an "A" and "B" project.*), respectively, the "A" and "B" contractor may only perform work in the areas in which they have the appropriate contractor's license (*An "A" or "B" contractor obtains "C" specialty contractor's licenses either on its own, or automatically under HAR § 16-77-32.*). The remaining work must be performed by appropriately licensed entities. It is the sole responsibility of the contractor to review the requirements of this project and determine the appropriate licenses that are required to complete the project.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HONOLULU, HAWAII

SPECIAL PROVISIONS

SPECIAL PROVISIONS

The General Provision is amended as follows:

A. ARTICLE I - TERMS, ABBREVIATIONS, AND DEFINITIONS

1. Section 1.3 Definitions: The definition for “Subcontractor” is amended by deleting it and replacing it with the following:

“Subcontractor – An individual, partnership, firm, corporation, or joint venture, or other legal entity, as licensed or required to be licensed under Chapter 444, Hawaii Revised Statutes, as amended, which enters into an agreement with the Contractor to perform a portion of the work.”

2. Add the following to section 1.3 Definitions:

“HAWAII ePROCUREMENT SYSTEM (HIePRO) - The State of Hawaii eProcurement System for issuing solicitations, receiving proposals and responses, and issuing notices of award.”

B. ARTICLE II – STANDARD PROVISIONS FOR COMPETITIVE SEALED BIDS AND AWARDS

1. 2.7 Request for Substitution of Specified Materials and Equipment Before Bid Opening is amended as follows:

- a. The last sentence in the first paragraph (line 147 to 152) be replaced with the following:

“Where a bidder intends to use a material or equipment of an unspecified brand, make, or model, the bidder must submit a request to the Department for review and approval at the earliest date possible. Requests shall be submitted via email to the Contact person listed in HIePRO for the solicitation and also posted as a question in HIePRO under the question/answer tab referencing the email with the request. The request must be posted in HIePRO no later than seventeen (17) calendar days before the bid opening date, not including the bid opening date.”

- b. The first sentence in the second paragraph (line 154 to 156) shall be replaced with the following:

“It shall be the responsibility of the bidder to submit sufficient evidence based upon which a determination can be made by the Department that the alternate brand is a qualified equivalent.”

2. 2.8 Preparation and Delivery of Bid is amended as follows: Last paragraph (line 189 to 192) shall be replaced with the following:

“The bidder shall submit the proposal in HiePRO. The proposal shall be UPLOADED to HiePRO prior to the bid opening date and time. Proposals received after said due date and time shall not be considered. Original (wet ink) proposal documents are not required to be submitted. The award will be made based on proposals uploaded in HiePRO. Any and all other additional documents explicitly designated and labeled as CONFIDENTIAL OR PROPRIETARY shall be UPLOADED SEPARATELY to HiePRO.”

3. 2.11 Bid Security is amended by deleting (a) and replacing it with:

“(a) Unless directed otherwise in the invitation for bids, each bid shall be accompanied by bid security which is intended to protect the Department against the failure or refusal of a bidder to execute the contract for the work bid or to supply the required performance and payment bonds. Bid security shall be in an amount equal to at least five percent of the base bid and additive alternates. Bid security shall be in one of the following forms:

- i. A deposit of legal tender;
- ii. A valid surety bid bond, underwritten by a company licensed to issue bonds in the State of Hawaii; or
- iii. A certificate of deposit; credit union share certificate; or cashier’s, treasurer’s, teller’s, or official check drawn by or a certified check accepted by a bank, savings institution, or credit union insured by the Federal Deposit Insurance Corporation (FDIC) or the National Credit Union Administration (NCUA) and payable at sight or unconditionally assigned to the Department. These instruments may be utilized only to a maximum of one hundred thousand dollars (\$100,000.00). If the required amount totals over one hundred thousand dollars (\$100,000.00), more than one instrument not exceeding one hundred thousand dollars (\$100,000.00) each and issued by different financial institutions shall be accepted.
- iv. Proposal Guaranty listed in (1) and (3) shall be in its original form, and shall be received at the Contracts Office, Department of Transportation, Aliiaimoku Hale, 869 Punchbowl Street, Room 105, Honolulu, Hawaii 96813 before the bid deadline.”

4. 2.12 Pre-Opening Modification or Withdrawal of Bids is amended by deleting 2.12 Pre-Opening Modification or Withdrawal of Bids in its entirety and replacing it with the following:

“2.12 Pre-Opening Modification or Withdrawal of Bids. A bidder may withdraw or modify a proposal after the bidder submits the proposal in HIePRO. Withdrawal or modify of proposal must be completed before the time set for the receiving of bids.”

5. 2.14 Public Opening of Bids is amended by deleting 2.14 Public Opening of Bids in its entirety.
6. 2.20 Bid Evaluation and Award is amended by replacing 2.20(a) and 2.20(b) with the following:

“(a) The award shall be made to the lowest, responsive, responsible bidder within 120 days after bid opening and shall be based on the criteria set forth in the invitation for bids. The Department may request the bidders to allow the Department to consider the bids for the issuance of an award beyond the 120 day period. Agreement to such an extension must be made by a bidder in writing. Only bidders who have agreed to such an extension will be eligible for the award.

(b) No bid shall be withdrawn or corrected for a period of 120 days after bid opening except for a mistake as described in this article; however, a bidder may withdraw a bid without penalty anytime prior to award of the contract if it finds it is unable to comply with the provisions regarding the employment of State of Hawaii residents as described in Section 7.2 and 103B-3, H.R.S.”

C. ARTICLE VII – LEGAL RELATIONS AND RESPONSIBILITY TO PUBLIC

1. 7.1 Insurance Requirements is amended by deleting paragraph “(b)(4) Builder’s Risk for All Work” in its entirety.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HONOLULU, HAWAII

SPECIFICATIONS

PART I

GENERAL PROVISIONS

The Hawaii Department of Transportation AIR and WATER Transportation Facilities Division General Provisions for Construction Projects dated 2016 is not physically included in these specifications. The General Provisions are available at

<http://hidot.hawaii.gov/administration/con/>

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HONOLULU, HAWAII

SPECIFICATIONS

PART II

TECHNICAL PROVISIONS

ARTICLE X - PROJECT DESCRIPTION

10.1 GENERAL - The work to be done under this contract includes furnishing all labor materials and equipment and other expenses required to repair the entire existing fender system and concrete haunches at Pier 3, Hilo Harbor, Hawaii.

Prospective bidders are advised to examine the existing conditions at the proposed project site to familiarize themselves with the nature and extent of work involved and working conditions. Appointments may be made with the State Harbors Division Maintenance Engineer for clarification of the work involved, definition of the limits of the work, the character and quality of materials specified, and site visits.

10.2 SCOPE OF WORK - The work to be done includes, but is not necessarily limited to, the following major items of work:

- A. Mobilization and Demobilization.
- B. Removing and disposing of existing tire fenders, lagging, wales, blocking, hardware, and other incidental items required to be replaced, in a lawful manner.
- C. Furnishing and installing new tire fender system including tire fenders, lagging, wales, blocking, bolts, grommets, chains, hardware, and other incidental items required to complete the fender system.
- D. Concrete Haunch Full Repairs including removal and disposal of the existing reinforced concrete haunch; installing new reinforcing steel; and preparing for, forming, and installing a new concrete surface.
- E. Concrete Haunch Spall Repairs including removal and disposal of a portion of reinforced concrete haunch; installing reinforcing steel; preparing for, forming, and installing new concrete mortar.

10.3 CONTRACT DRAWING - The location and size of the repair area shown on the plans are approximate and is included for bidding purposes only. All structures and portions of structures shown on the plans are existing unless specifically noted. Existing conditions shown are based on the best available information. No guarantee is given that they are more than approximately correct.

10.4 HARBOR OPERATIONS - The Contractor shall coordinate its work so as to minimize interference with harbor operations. Shipping and dock activities by tenants will take precedence over the Contractor's activities.

The project areas are heavily used for barge operations. The work shall be done in increments and the State will arrange to clear a portion of the project area to allow the Contractor to accomplish its work. No work will be allowed when a vessel is berthed adjacent to the work area. No hot work shall be allowed when fuel barges are berthed. Vessels call at various days of the week and bidders can obtain information on passenger

ship schedules and daily shipping schedules at Hawaii.Portcall.com. The exact scheduling and sequencing of the work, as well as restrictions on the Contractor's activities, will be established at the pre-construction meeting. The Contractor shall attend pre-construction meetings to coordinate its work with others and shall complete all work within the work schedule.

All work shall be scheduled with the Harbors Division Hawaii District Manager, and the Harbors Division Construction Engineer. The Contractor shall give the Harbors Division Hawaii District Manager and the Construction Engineer at least two (2) weeks prior notice whenever its work will render a portion of the pier unusable for equipment or pedestrian traffic.

10.5 WORK SCHEDULE AND STORAGE AREAS - The work schedule and assignment of storage area(s) shall be discussed and coordinated with the Harbors Division Hawaii District Manager, and the Construction Engineer and shall be subject to their approval. The Contractor shall turn in a work schedule at least two (2) weeks prior to actual construction for approval by the Harbors Division Hawaii District Manager and the Construction Engineer. The Contractor shall complete all work within the work schedule. The Contractor will be responsible for maintaining the work and storage areas in a neat and orderly condition.

Should the Contractor find itself unable to complete the repair of the fender system before such fender system is to be occupied by a vessel, the Contractor shall, at its own cost, install temporary fenders which may consist of used rubber tires lashed together and hung over the face of the pier.

Arrangements for work and storage areas shall be made with the Harbors Division Hawaii District Manager. The Contractor shall be responsible for maintaining the work and storage areas and, if necessary, shall restore these areas to their original condition at no cost to the State in the event any damage results from its operations.

10.6 HARBOR SECURITY - The Contractor shall submit required documentation of all Contractor and subcontractor's employees, their representatives, suppliers, manufacturers, and alike, and of all necessary vehicles needing access to the project site to the Harbors Division Construction Engineer and District Manager before starting work on the project. The documentation will include the following:

- A. Authorized personnel's first name, middle initial(s), and last name by company name.
- B. Vehicle(s) license plate number(s) by company name.
- C. The Contractor may be directed to use a specified entrance to enter and exit the harbor. Upon every entry, each employee must present and possess a photo identification (ID) card.

- D. All Contractor's and sub-contractor's employees, their representatives, suppliers, manufacturers, and authorized personnel needing access to the project site shall wear their photo ID card at all times.
- E. Contractor's vehicles must be identified with a company logo and will be subject to search. Any employee's personal belongings will also be subject to search.
- F. If the Contractor wishes to remove any fencing or open any locked gates, they shall coordinate with and request approval from the Harbors Construction Engineer and District Manager. If approval is granted, the Contractor shall then be responsible for securing open fencing or gate(s) immediately after entering or posting security personnel to monitor ingress and egress. Inspections of vehicles and equipment moving through the access points will be done in accordance with current MARSEC level and directives.
- G. If security personnel are required, the Contractor shall hire the same contract security that provides service to the State of Hawaii, Department of Transportation, Harbors Division. In the event that the security contract for Harbors changes, contractor must hire the new security contractor.
- H. By the end of each day, the Contractor shall re-erect and restore all fencing/barrier/perimeter security measures to the satisfaction of the Construction Engineer and the District Manager. Electricity and lighting shall also be restored and in satisfactory working order, to no less than pre-construction conditions, by the end of each day, to the satisfaction of the Construction Engineer and District Manager.
- I. Under no circumstances shall perimeter security be compromised. If determined by the State, and solely by the State, that the contractor has left the project site in a condition that compromises security of the harbor, the State reserves the right to make the necessary arrangements to provide and enhance perimeter security, including restoration of electrical power and lighting, at the sole expense of the Contractor.
- J. At times, the maritime security level for the State of Hawaii and/or the general color-coded security level for State of Hawaii may be temporarily elevated. In these events, the contractor may be prohibited to access the project site and may be required to stop work as directed by either the Harbors Division's Construction Engineer or District Manager. The Harbors Division will consider impacts to the work and schedule as a result of prolonged work stoppages.
- K. Prior to starting work on this project, the Contractor shall provide a list of names (full legal name) and birth dates of all employees, representatives, subcontractors, vendors, and all alike, as well as their vehicles license number, year, make, model, and color, that will be entering the project site. All employees, representatives, subcontractors, vendors, and all alike shall wear their respective company's identification card bearing the company's name, the individual's first

and last name, middle initial(s), and a recent photograph of the individual on the front of the identification card at all times while on Harbor's property.

With the possible exception of Item J above, all other requirements indicated shall be considered incidental to the project and shall be provided by the contractor at no cost to the State.

The Contractor's personnel requiring unescorted access to secure areas of maritime facilities will be required to obtain a Transportation Worker Identification Credential (TWIC). The project area has been deemed to be within a secured area. TWIC was established by Congress through the Maritime Transportation Security Act and is administered by the Transportation Security Administration (TSA) and U.S. Coast Guard. To obtain a TWIC, the applicant must provide biographic and biometric information such as fingerprints, sit for a digital photograph and successfully pass a security threat assessment conducted by TSA. The Contractor will be responsible to obtain and pay for all costs associated in providing their appropriate employees with TWIC. Information regarding TWIC is available on the TSA website at <https://www.tsa.gov/for-industry/twic>.

10.7 LIABILITY AND RESPONSIBILITY - The Contractor shall obtain permits, provide, erect and maintain warning signs, lights, barricades, fences, watchmen and/or other means as necessary to prevent unauthorized persons from wandering onto the job site where they may suffer injury or create a hazard to the construction operations or the work in progress. The Contractor shall also take all reasonable precautions for safety in its operations and to prevent injury to its employees and to others at the job site.

The Contractor shall be responsible for any and all damages to harbor facilities caused by its operations or negligence. The Contractor shall, at its own expense, make prompt restitution for damages to the facilities caused by its operations or negligence. The Contractor shall hold the State harmless from all claims for loss or injury. The Contractor shall at its own cost remove defective work and replace the required work in an acceptable manner.

The Contractor shall comply with all applicable Federal, State, and County Laws, including Hawaii Public Health regulations, and all local laws and regulations concerning pollution control and abatement. Acquiring Notification and Permits associated with the aforementioned regulations and laws as well as any applicable fees will be the responsibility of the Contractor.

The Contractor shall ensure that no debris, petroleum products or other deleterious materials be allowed to fall, flow, leach, or otherwise enter the water. Any oil spills shall be immediately removed to the satisfaction of the Construction Engineer.

The Contractor shall maintain the job site in a neat and orderly condition during the progress of the work. The Contractor shall be responsible for all dust control. Dust shall be kept within acceptable levels at all times. Upon completion the Contractor shall

remove all surplus material, debris, equipment, tools, etc. belonging to it and leave the premises in a neat and orderly condition. No burning of debris and waste materials shall be permitted on the project site.

10.8 PERMITS - The Contractor will require permits for all welding and burning operations if welding is contemplated. The Contractor shall obtain the necessary permits from the Harbors Division District Manager.

10.9 BEST MANAGEMENT PRACTICES - The Contractor must follow standard best management practices (BMP) for air pollution, water pollution, noise and solid waste control, as required by Federal, State and County regulations, to protect the environment from the effects of construction activity, including prohibiting any construction debris or other deleterious materials to fall, flow or otherwise enter the harbor waters.

The Contractor shall submit a site-specific BMP plan to the Harbors Division Construction Engineer for review and comment before work begins. The plan shall satisfy the requirements of Article XIV – Temporary Water Pollution, Dust, and Erosion Control. This plan shall describe and detail all methods procedures to be used to prevent air and water pollution, including preventing any materials, wastes and debris from entering any adjacent storm drain system and harbor waters to the satisfaction of the Harbors Division. The Contractor shall revise the BMP plan, at no additional cost to the State, should it be determined by the Construction Engineer that the plan is insufficient to prevent pollution.

10.10 APPROVED EQUAL - The term “approved equal” as used in these specifications refers to the use of alternate equipment, articles or materials of equal quality and characteristics for the purpose intended. An approved equal will be permitted, upon approval of the Director prior to bid opening, in accordance with the General Provisions.

10.11 STANDARD SPECIFICATIONS - The term "Standard Specifications" as used in these Technical Provisions of these Specifications, shall mean the "Hawaii Standard Specifications for Road and Bridge Construction, 2005, Department of Transportation Highways Division, Honolulu, Hawaii.”.

10.12 AS BUILT DRAWINGS - The Contractor shall keep one set of drawings at the job site and make all field changes thereon. After completion of the project, a PDF/A format digital file with all the field changes showing the locations, dimensions, areas, and the type of repair work completed shall be submitted to the Construction Engineer.

10.13 COMPLETION TIME - All work for this project shall be completed within the specified time period as listed in page P-1 of the Proposal. The number of days shall commence on the issuance of the notice to proceed. The intent of the contract is to provide for the construction final acceptance of the work described by the contract documents at the accepted bid price and within the time established by the contract. The Contractor has the duty to furnish all labor, materials, equipment, tools, transportation, incidentals, and

supplies and to determine the means, methods and schedules required to complete the work in accordance with the contract documents.

Unless otherwise directed by the Engineer in writing, the Contractor shall not commence with physical construction without sufficient materials and equipment available at the project site for either continuous construction until completion, or completion of a specified portion of the work.

10.14 SUBMITTALS - The Contractor shall submit for review, shop drawings or manufacturer's brochures, one (1) copy in PDF format, for the following items:

1. BMP Plan and Drawings.
2. Timber – Timber members, including but not limited to, rubbing blocks, wales and lagging, and blocking.

The Contractor shall furnish a certificate from the supplier certifying to the treatment of the lumber.

3. Tire Fenders
4. Timber Fasteners, Anchor Bolts, Ogee Washers, Fasteners, Tire Cables, Chains, Shackles, Rubbing Angles, Tire Grommets, Eye Bolts, and any other metal appurtenances.
5. Reinforcing Steel
6. Cold Galvanizing Compound, Anti-Corrosion Coating, and Epoxy Grout, Epoxy Mortar, Epoxy Bonding Compound.
7. Concrete and Mortar

10.15 PAYMENT - Payment shall be made as specified below. Such payment shall include furnishing all labor, material, equipment, and other expenses required to complete each item in accordance with the plans and specifications.

- Item 1 Repair Fender System - Payment shall be made at the lump sum price bid in the Proposal Schedule. Such payment shall include removing and disposal of the existing timber fender, tires, and hardware including excavating to expose previously embedded anchor bolt sleeves and cutting of anchor bolts incapable of being wholly removed, furnishing and installing new upper wales and spacer blocking, furnishing and installing new rubbing blocks and vertical lagging, furnishing and installing new bolts of the various types including welding of anchor bolt extensions where required, furnishing and installing new lower wales including new spacer blocking, reinstalling of previously removed tire bumper assemblies where specified, furnishing and installing of

new tire bumper assemblies including new chains, fasteners, and new tires; furnishing and installing connection bolts, grommets, chains, and hardware; and other incidental items and work required to complete this item.

Item 2 Concrete Haunch Spall Repair - Payment shall be made at the unit price bid in the Proposal Schedule. Such payment shall include removal and disposal of the existing reinforced concrete haunch; install new reinforcing steel; preparing the concrete surface; forming and installing new concrete mortar; and other incidental work required to complete this item.

Item 3 Concrete Haunch Full Repair - Payment shall be made at the unit price bid in the Proposal Schedule. Such payment shall include removal and disposal of the entire existing reinforced concrete haunch; install new reinforcing steel; preparing the concrete surface; forming and installing new concrete; and other incidental work required to complete this item.

ARTICLE XI - MOBILIZATION AND DEMOBILIZATION

11.1 GENERAL - The work consists of furnishing at the job site, plant, equipment, materials, labor and appliances and performing all work in connection with mobilization and demobilization for the job in accordance with this article of the specifications.

11.2 DESCRIPTION

- A. Mobilization shall include setting up, ready for use, all plant, equipment and necessary materials at the job site.
- B. Providing temporary barricades as required for Harbor operations during construction.
- C. Demobilization shall include the removal of all the Contractor's plant and equipment and surplus material from the job site. The cleanup of the job site, satisfactory to the Construction Engineer, shall also be included in this article.

11.3 PAYMENT - Payment for Mobilization and Demobilization shall not be made separately but shall be incidental to applicable items in the Proposal Schedule.

ARTICLE XII – FENDER SYSTEM REPAIRS

12.1 GENERAL – The work to be done under this Article consists of repairing the entire rubber tire fender system for Pier 3 at Hilo Harbor. The work includes, but is not limited to the following:

- A. Remove existing fender system, including tire bumpers and fastenings, vertical lagging, rubbing blocks, upper wales, lower wale and Type "I", "II", and "III" bolts.
- B. Furnish and install new Type "I", "II", and "III" bolts.
- C. Furnish and install new 14-inch x 14-inch upper wales of the various lengths.
- D. Furnish and install new 4-inch x 6-inch rubbing blocks with 3-inch x 4-inch x 3/8-inch steel angle at all new tire bumper assemblies.
- E. Furnish and install new spacer blocking as required.
- F. Furnish and install new vertical lagging as required.
- G. Reinstall previously removed tire bumpers using new chains, shackles, grommets, and fasteners.
- H. Furnish and install new tire bumper assemblies where shown on the plans including new chains, shackles, grommets, and eye bolts.
- I. Drill various sized holes in tires for installation of new tire grommets and 3-inch drain holes.
- J. Furnish and install new miscellaneous fastening hardware such as boat spikes, lag screws, wire nails, etc., as required.

12.2 OBSTRUCTIONS TO NAVIGATION – Should the Contractor during the progress of his work lose, dump, sink, or misplace any material, plant, machinery, or equipment in harbor waters and if in the opinion of the State Harbor Master it becomes a danger or obstruction of navigation, the Contractor shall recover and remove immediately.

12.3 MATERIALS

- A. Timber - All new timber, including timber wales, rubbing blocks, spacer blocks, and vertical lagging, shall be Douglas Fir, rough select structural grade, pressure coal tar creosote treated in accordance with American Wood Preservers Association (AWPA) Standard P 1 (except for the lagging, which shall be CCA

(Wolmanized) treated in accordance with P5; all cut surfaces of the lagging shall receive a protective coating of Wolman "0-0") . Pressure treatment shall be to a retention of 20 pounds per cubic foot or to refusal. Timber shall be straight, free from splits, checks or other defects, which may weaken the member structurally. The Contractor shall furnish a certificate from the supplier certifying to the treatment of the lumber.

All surfaces of pressure coat tar creosote treated lumber cut after treatment shall be treated with "Jasco Termin-8" or approved equal.

- B. Rubbing blocks at tire bumper assemblies shall be 6-inch x 4-inch douglas fir rough select construction grade, sound, dry, undamaged and free of cracks, splits, checks and other defects and shall be ACZA treated in accordance with AWPA Standard P5 to 0.60 pcf retention. The Contractor shall furnish a certificate from the supplier certifying to the treatment of the lumber.
- C. Spacer blocks shall be Marine, Exterior Grade, DFPA B/B plywood and shall be treated as specified above for rubbing blocks. Finished thickness may be built up of two (2) 3/4-inch-thick pieces.
- D. Miscellaneous Timber Fasteners such as boat spikes (button head), nails; lag screws, and common wire nails shall be hot dip galvanized.
- E. Eye Bolts – 3/4-inch Crosby Shoulder Nut Eye Bolt with working in-line working load limit of 7,200 lbs., or approved equal. Use teal colored Simpson Strong-Tie SET-XP high strength anchoring adhesive epoxy when installing eyebolts.
- F. Ogee Washers shall be hot dip galvanized, ogee pattern, cast iron. Size to fit new stud bolts.
- G. Type “I”, “II”, and “III” Bolts - Shall be fabricated from round bars conforming to ASTM A-36 standard and threaded a minimum of 3 inches at both ends. The bolts shall be furnished with cast iron ogee washers and hex nuts as required. Nuts shall conform to ASTM A 307. Washers and nuts shall be hot dip galvanized. The bolts shall be hot dip galvanized after fabrication.
- H. Chain for hanging tires shall be hot dip galvanized dock fender (mooring) chain, sized as shown on the plans. For the 1/2-inch dock fender chain, the minimum working load limit shall be 9,000 pounds. Existing chain may be accepted for use in place of new chain and shall be individually inspected and approved by the Construction Engineer or Harbor Agent prior to use in the newly repaired fender system. It is the Contractor's responsibility to verify the length of chain necessary to completely repair the fender system, with any additional chain placed in a

location deemed appropriate by the Construction Engineer and Harbor agent for storage and future use.

- I. Shackles shall be forged, hot dip galvanized steel, anchor shackle with bolt, nut, and stainless-steel cotter pin. 5/8-inch anchor shackle shall have a minimum working load limit of 3 tons, and 7/8-inch anchor shackle shall have a minimum working load limit of 6-1/2 tons.
- J. Rubbing Angles – Steel rubbing angles shall be fabricated as shown on the plans and the structural steel used shall conform to ASTM A-36 and shall be hot-dip galvanized in accordance with ASTM A-123.
- K. Tire Grommets – Grommet assemblies shall be fabricated as shown on the plans and the structural steel used shall conform to ASTM A-36 and shall be hot-dip galvanized in accordance with ASTM A-123. All welding shall conform to the requirements of the American Welding Society. Pipe used in grommets shall be standard weight (Schedule 40) steel pipe. The entire assemblies shall be hot-dip galvanized after fabrication in accordance with ASTM-123. Bolts, nuts, and washers shall be hot-dip galvanized conforming to ASTM A-307.
- L. Structural Steel - Grommet assemblies and steel rubbing angles shall be fabricated as shown on the plans and the structural steel used shall conform to ASTM A36. All welding shall conform to the requirements of the American Welding Society. Pipe used in grommets shall be standard weight (Schedule 40) steel pipe. The entire assembly shall be hot dip galvanized after fabrication in accordance with ASTM A123.
- M. Cold Galvanizing Compound - Cold Galvanizing compound shall be "ZRC Cold Galvanizing Compound" as manufactured by ZRC Worldwide or approved equal.
- N. Tires – The existing rubber tires from the fender system shall be reused in the newly repaired fender system after being inspected and approved by the Construction Engineer and Harbor Agent. Newly provided worn tires may be accepted for use in place of new tires and shall be individually inspected and approved by the Construction Engineer or Harbor Agent prior to use in the newly repaired fender system. It is the Contractor's responsibility to provide enough satisfactory worn or brand-new tires to completely repair the fender system, with any additional tire fenders placed in a location deemed appropriate by the Construction Engineer and Harbor agent for storage and future use.

12.4 CONSTRUCTION – All removed material shall be hauled away from the job site and disposed of by the Contractor in a lawful manner.

A. Removal work

1. Prior to any removal work, the Contractor shall carefully record the locations of all materials to be removed and the manner in which the materials are secured to the existing structure. Except as specified otherwise on the drawings, or in these Specifications, all removed material shall be reinstalled in the finished structure at the same location and in the same manner as existed prior to removal. All blocking adjacent to removed wales shall be replaced with new blocking.
2. The existing timber fender system shall be carefully removed up to the limits shown on the plans and in such a manner as not to damage the existing pier and other structures. All existing materials that will be replaced shall become the property of the Contractor and shall be disposed of away from the project site in a lawful manner.
3. Existing Type "I" and Type "III" bolts shall be removed in their entireties by unscrewing them from the nuts and washers embedded in the existing concrete. Should the existing Type "I" and Type "III" bolts be incapable of being removed, the Construction Engineer shall be notified and the existing bolts shall be cut off for extension by welding as shown on the plans.

B. Fender Work

1. New timber wales, blocking, spacers, vertical lagging, eye nut assemblies and steel rubbing angles shall be installed as shown on the plans. All new hardware shall be provided. Joints shall be made to match the pattern of the existing timber fender system.
2. Treated timber, lumber, and rubbing blocks shall be handled carefully and stacked neatly at the jobsite. No hooks or other lifting devices that may damage the surface of the treated timber shall be used.
3. Timber and rubbing blocks shall be pre-drilled for fasteners. Holes for countersinking spikes and nails 30d or larger shall be drilled approximately 3/4 of the diameter of the fastener to be used. Holes for through bolts shall be drilled no more than 1/32 inch larger in diameter than the bolt to be used. Counter bore holes shall be drilled as required. Timbers and rubbing blocks cut or drilled after pressure treatment shall

have the cut surfaces treated with a thorough brush coat of a wood preservative containing copper naphthenate, "Jasco Tertnin-8" or approved equal.

4. New 3/4-inch eye bolts shall be in-line with existing eye bolts and spaced evenly to match existing eye bolt spacings. The new eye bolts shall have a minimum tap depth of the basic shank length plus one-half the nominal eye bolt diameter. Opening of the eye bolts shall match existing eye bolt orientations and face perpendicular to the pier edge.
5. Type "I", "II", and "III" Bolts shall be of the various sizes and lengths as shown on the drawings. Type "I" and Type "III" bolts shall be installed in existing nuts and washers previously embedded in concrete. Where an existing Type "I" or Type "III" bolt was cut off instead of being wholly removed, a threaded extension shall be welded to the cut end as shown on the drawings to attain the length required for the finished assembly.
6. Bolt heads and nuts shall have washers in full contact with the timber. The length of bolts shall be such that they pass completely through the nuts and not more than one washer will be necessary under head and nut. Damaged zinc coatings on bolts, washers, and nuts shall be retreated with cold galvanizing compound. Holes at counter sunk boltheads or nuts shall be filled with bituminous mastic or caulking compound.

Bolts, nuts, washers and miscellaneous plates shall be coated with "NO-OX-ID" grease, or approved equal, before assembly.
7. Lagging shall be secured to wales with two 3/8" x 9" long boat spikes at each wale it contacts. Spikes shall be counter sunk to the depth of the head.
8. The fender system shall be pre-assembled on the pier deck before being set on the concrete haunch. Drilling and cutting of timbers, after they are on the concrete haunch, shall be kept to a minimum.
9. Existing tires to be reused shall be inspected and approved by the Construction Engineer and installed as shown on the plans. Replaced tires shall be disposed of by the Contractor at the Contractor's expense and in a lawful manner. The Contractor shall be responsible for hauling the new rubber tires to the project site at no additional cost to the State.
10. The Contractor shall drill holes for installation of grommets as shown on the plans. A 3-inch diameter drain hole shall be drilled into the bottom of

each tire. New tire grommets shall be installed as shown on the plans. The tires shall be fastened to the eyebolts with new chains and shackles as shown on the plans.

11. Damaged zinc coating on grommets, chain, bolts, washers, nuts or other components shall be treated with cold galvanizing compound.
12. All debris resulting from this work shall be disposed of away from the jobsite. Depositing debris into the harbor waters will not be allowed.

12.5 PAYMENT - Payment for fender repairs shall be made as described in Article X of these Specifications.

ARTICLE XIII – CONCRETE REPAIR WORK

13.1 GENERAL - Work under this Article includes furnishing all labor, materials and equipment necessary to repair spalled concrete on the haunches adjacent to fender repairs in the project area. The work includes, but is not limited to the following:

- A. Removal of concrete surrounding reinforcing steel in repair areas.
- B. Preparing concrete repair area.
- C. Replacing severely corroded reinforcing steel with replacement reinforcing steel at spall repairs.
- D. Installing new reinforcing steel.
- E. Cleaning reinforcing steel and applying reinforcing steel coating.
- F. Installing and removing formwork.
- G. Placing repair concrete or patching compound.
- H. All work shall be in accordance with the following sections of the Standard Specifications except as modified or supplemented herein:

Section 503 Concrete Structures
Section 601 Structural Concrete
Section 602 Reinforcing Steel
Section 711 Concrete Curing Materials and Admixtures

Sections on Materials referenced in the above sections are hereby incorporated.

13.2 MATERIALS

- A. Concrete
 - 1. Concrete shall be Class $f'c = 5,000$ psi conforming to Section 601 “Structural Concrete” of the Standard Specifications.
 - 2. Maximum aggregate size shall be 3/8 inches and shall be coordinated with concrete preparation procedures for spall repairs.
- B. Admixtures - Admixtures to be used in the repair concrete shall be approved by the Harbors Division Construction Engineer and shall conform to Section 711 of the Standard Specifications. Contractor shall strictly adhere to the manufacturer’s recommendations regarding the use of admixtures including storage, transportation and method of mixing.

CORTEC MCI 2005NS migrating corrosion inhibiting admixture manufactured by Cortec Corporation, or approved equal, shall be added at the following rate and as recommended by the manufacturer.

CORTEC MCI 2005NS: 1.5 pints per cubic yard of concrete

To combat climate change and reduce the concrete carbon footprint, supplementary cementitious material(s) shall be used to reduce the cement content in the concrete for this project. The following supplementary cementitious material shall be substituted for cement by weight at the following rate and as recommended by the concrete supplier.

Silica Fume: 10% of cement by weight

The maximum water to cementitious materials ratio shall be 0.40 and the mix water shall be reduced as necessary to account for the admixture.

C. Patching Compound

1. Patching compound may be used in lieu of ready mix concrete.
2. Patching compound for form and pour repairs shall be Sikacrete 211 SCC Plus by Sika, or approved equal.
3. Patching Compound for repairing vertical repairs in lifts shall be Sikaquick VOH with Later R by Sika, or approved equal.

D. Reinforcing Steel for Weld Splicing - Reinforcing for weld splicing shall be ASTM A706 Grade 60.

E. Welds - Welding electrodes shall be low hydrogen E70.

F. Reinforcing Steel Anti-Corrosion Coating – Anti-corrosion coating with a minimum 7 day open time for reinforcing steel shall be Sika Armatec 110 Epocem by Sika, or approved equal.

G. Curing Compound for concrete repairs shall be acceptable to the Harbors Division Construction Engineer.

H. Forms shall conform to Section 503.03.C “Forms” of the Standard Specifications.

I. Snap ties and inserts shall be plastic or stainless steel. All loose reinforcing steel shall be secured with ties at all intersections with adjacent reinforcing steel.

13.3 CONSTRUCTION METHODS

- A. Concrete construction shall conform to the American Concrete Institute (ACI) ACI 318R and ACI 546R-14.
- B. Surface preparation for spall repair work shall follow the International Concrete Repair Institute (ICRI) Guideline No. 310.1R-2008. The sizes, locations and types of repair work specified on the drawings are intended to be approximate only. The actual amount and type of repair work to be done shall be determined after completion of the removal work. Removal and surface preparation shall be performed in the order listed below.
1. All visible loose and deteriorated concrete shall be removed with suitable pneumatic or hand tools until only sound concrete remains.
 2. Such chipped areas and adjoining areas shall be further sounded by tapping with a light hammer. Areas emitting a hollow sound indicating unsound and delaminated concrete with voids shall be further chipped to sound concrete and beyond the extent of the corroded reinforcing.
 3. Partially exposed reinforcing steel or steel exposed during the concrete chipping process shall be fully exposed throughout their length within the repair area. There shall be a minimum of 3/4 inch of clear distance between the reinforcing steel and the chipped surface of the existing concrete for placing patching compound or concrete.
 4. The edges of the repair shall be saw-cut and chipped as necessary to attain a minimum repair material depth of 3/4 inch and to prevent featheredge conditions.
 5. The existing concrete in the repair areas shall be chipped to approximate rectangular dimensions to facilitate the repair work.
 6. The patch area shall be cleaned of all dust and debris just prior to patching with high pressure, oil-free compressed air with appropriate PPE's and containment.
- C. Live Load Limitation - Any element being repaired shall not be subjected to live loads during the period starting from the removal of existing concrete until the repair concrete has been allowed to cure for 7 days or obtained a minimum compressive strength of $f'c=4,000$ psi.
- D. Cleaning Reinforcing Steel - All exposed concrete and reinforcing steel in the repair area shall be needle gunned to remove all scale, loose rust, debris and other bond-inhibiting materials. Any areas not patched more than 48 hours after cleaning shall be recleaned.

- E. Replacing Reinforcing Steel - All existing reinforcing bars with less than 80% of their cross-section remaining after cleaning shall be supplemented with welded reinforcing as shown on the plans. Replacement reinforcing steel will be measured by the pound, complete in place. The theoretical unit weight of each size of reinforcing bar used will be based upon Table 602.04-1 of the Standard Specifications.
- F. Welding Reinforcing Steel - All welding shall conform to AWS D1.4. All existing bars to be welded with a carbon equivalent (C.E.) above 0.55 percent shall be preheated according to the requirements set forth in AWS D1.4. If the C.E. is unknown, maximum preheat requirements for an assumed C.E. greater than 0.75 percent shall be used.

The Contractor shall survey the entire area around the project site to ensure that no hazardous vapors are present. The Contractor shall certify in writing that the project site shall be safe for hot work and free of hazardous vapor. No open flame, hot cutting, welding or other hot work will be permitted without the certification.

- G. Reinforcing Steel Coating - All exposed steel shall be liberally coated with anti-corrosion coating per manufacturer's recommendations.
- H. Photographs – The Contractor shall provide digital photographs of underside spall repairs to the Harbors Division Construction Engineer for their review. Photos shall be in color and taken with a digital camera having a 6.0 mega pixel resolution or higher. Each photo shall be identified with the time, date, and location referenced to the plans.

The Contractor shall provide one set of photos per haunch repaired. A set of photos shall contain at least two photos for each of the procedures listed below.

1. Existing condition of concrete repair.
2. After all removal of existing concrete has been completed, including spalled and delaminated concrete, concrete surrounding reinforcing steel in repair areas, and sawcut and chipped out concrete at the perimeter of the repair.
3. After cleaning of the reinforcing steel.
4. After replacing severely corroded steel with weld spliced reinforcing steel.
5. After applying reinforcing steel coating.
6. After formwork has been installed.
7. After forms have been removed, or concrete has cured for at least 3 days.

The photos shall be taken on the same day that the procedure has been completed and shall clearly represent typical details of the completed procedure. The photos shall also be emailed to the Harbors Division Construction Engineer on the same day that the photos were taken. Additionally, one set of 4" x 6" sized prints shall be delivered to the Construction Engineer at the completion of the project.

- I. Formwork - Formwork shall be installed in accordance with Section 503.03.C - "Forms" of the Standard Specifications. The exact method of formwork requires the Construction Engineer's approval. Forms shall be designed to provide a minimum of three (3) inches of concrete cover over all reinforcing steel, unless noted otherwise. All edges of concrete repairs shall be chamfered and existing joints shall be maintained.
- J. Placing Concrete - Concrete shall be placed in accordance with Section 503.03 - "Construction" of the Standard Specifications. All repair surfaces including forms shall be thoroughly washed with clean water and remain in a saturated surface dry condition prior to placing concrete. Surfaces shall be clean and free of loose and other bond-inhibiting materials. The repair concrete shall be vibrated, rodded or tamped during placement to consolidate the pour and fill all corners of the patch or form and beneath the reinforcing. As an alternate self-consolidating concrete maybe used. There shall be no cold joints in the field of the repair.
- K. Patching Compound - Patching compound may be used in lieu of ready mix concrete. The Contractor shall follow the manufacturer's recommendations for mixing and placing patching compound, including application of a slurry coat to prime the substrate and application of the repair material in lifts.
- L. Finish - Concrete finish shall be Class I - Ordinary Surface Finish as specified in Section 503.03.M.1 of the Standard Specifications.
- M. Formwork Removal - Formwork for all repairs shall not be removed for a minimum of 24 hours and until concrete has obtained a minimum compressive strength of $f'c = 4,000$ psi.
- N. Concrete Curing - Concrete repairs on the underside of the pier shall be cured a minimum 7 days by leaving the forms in place or covering the surface with a curing compound approved by and acceptable to the Harbors Division Construction Engineer.
- O. Identifying Repairs - Identify all repair work with paint. The color and marking for identification shall be a minimum 6 inch in height and black stenciling unless otherwise directed by the Harbors Division Construction Engineer.
- P. Defective Work - After forms have been removed, the repaired area shall be tested by tapping with a hammer. Any "hollow" sound emitted shall indicate the presence of voids and shall be sufficient cause for removal of repair work and reconstruction. The method of repairing defects shall be subject to the approval

of the Construction Engineer. All defects shall be corrected by the Contractor at no additional cost to the State.

13.4 PAYMENT - Payment for concrete repair work shall be made as described in Article X of these Specifications.

ARTICLE XIV – TEMPORARY WATER POLLUTION, DUST, AND EROSION
CONTROL

For Project NOT Subject to NPDES NOI-C Permit

14.1 DESCRIPTION - This section is required for all work, including the Contractor's storage sites. It describes the following:

- A. A detailed site-specific Best Management Practice (BMP) Plan including diagrams and narratives; constructing, maintaining, and repairing temporary water pollution, dust, and erosion control measures at the project site including local material sources, work areas and access roads; removing and disposing of wastes and hazardous wastes; and control of fugitive dust (defined as uncontrolled emission of solid airborne particulate matter from any source other than combustion). Additionally, all projects at Honolulu, Kalaeloa Barbers Point, and Kahului Harbors are subject to State of Hawaii, Department of Transportation (HDOT) Harbors Division, Stormwater Management Plan (SWMP) requirements, unless exempted, and are subject to Harbors Stormwater BMP inspections. If any requirement conflicts with those administered by State of Hawaii, Department of Health (HDOH), the Contractor shall follow the more stringent requirement.
- B. Compliance with applicable federal and other state permit conditions.
- C. Work associated with dewatering and hydrotesting activities and compliance with conditions of the NPDES general permit coverage authorizing discharges associated with construction activity dewatering and hydrotesting.

14.2 GENERAL REQUIREMENTS - In order to provide for the control of water pollution, dust, and erosion arising from the construction activities of the Contractor and his subcontractors in the performance of this contract, the work performed shall comply with all applicable federal, state, and local laws and regulations concerning water pollution control including, but not limited to, the following regulations.

- A. State of Hawaii, HDOH, Hawaii Administrative Rules (HAR) Chapter 11-54 – Water Quality Standards and Chapter 11-55 – Water Pollution Control.
- B. For projects at Honolulu, Kalaeloa Barbers Point, and Kahului Harbors ONLY, HDOT Harbors Division, Stormwater Management Plan.
- C. For projects at Honolulu, Kalaeloa Barbers Point, and Kahului Harbors ONLY, City and County of Honolulu (CCH), Rules Relating to Water Quality.
- D. For projects at Honolulu, Kalaeloa Barbers Point, and Kahului Harbors ONLY, CCH, Storm Water BMP Manual for Construction.
- E. 40 CFR Part 110, Environmental Protection Agency (EPA), Discharge of Oil.

- F. 40 CFR Part 117, EPA, Determination of Reportable Quantities for Hazardous Substances.
- G. 40 CFR Part 261, EPA, Identification and Listing of Hazardous Waste.
- H. 40 CFR Part 302, EPA, Designation, Reportable Quantities, and Notification.
- I. 49 CFR Part 171, U.S. Department of Transportation, Hazardous Materials Regulations.

14.3 MATERIALS - Materials shall conform to the following when applicable.

- A. Slope Drains. Slope drains may be constructed of pipe, fiber, mats, erosion control fabric, geotextiles, rubble, Portland cement concrete, bituminous concrete, plastic sheets, or other materials acceptable to the Construction Engineer.
- B. Grass. Grass shall be quick growing species such as rye grass, Italian grass, or cereal grasses. Grass shall be suitable to the area and provide a temporary cover that will not compete later with permanent cover. Alternative grasses are allowable if acceptable to the Construction Engineer.
- C. Fertilizer and Soil Conditions. Fertilizer and soil conditioners shall be a standard commercial grade acceptable to the Construction Engineer.
- D. Silt Fences. Silt fences shall be synthetic filter fabric mounted on posts and embedded in compacted ground in compliance with American Society for Testing and Materials (ASTM) D6462-03, Standard Practice for Silt Fence Installation.
- E. Berms. Berms shall be gravel or sand wrapped with geotextile material. Alternate materials are allowable if acceptable to the Construction Engineer.
- F. Alternate materials or methods to control, prevent, remove, and dispose of pollution are allowable if acceptable to the Construction Engineer.

14.4 CONSTRUCTION

- A. Preconstruction Requirements
 - 1. Temporary Water Pollution, Dust, and Erosion Control Meeting. The contractor shall be required to submit a site-specific BMP Plan to the Construction Engineer and address all comments by the Construction Engineer. After the Plan is accepted in writing by the Construction Engineer, the Contractor shall schedule a meeting with the Construction Engineer before the start of construction work to discuss the sequence of work, and plans and proposals for water pollution, dust, and erosion control.

2. Temporary Water Pollution, Dust, and Erosion Control Submittals. The Contractor shall submit the site-specific BMP Plan to the Construction Engineer prior to the start of work for review of compliance with this Article. A site-specific BMP Plan template is available online at <https://hidot.hawaii.gov/harbors/malamaikeawakai/>, under **HDOT Harbors Construction and Post-Construction Programs – Documents and Forms**.

- a. Written site-specific BMP Plan shall include the following as applicable:
 - 1) Identification of potential pollutants and their sources and other factors that may cause water pollution, dust, and erosion.
 - 2) A list of all material and heavy equipment to be used during construction. Vehicles and equipment shall be well maintained and free from any type of fluid leaks.
 - 3) Construction schedule.
 - 4) Name(s) of specific individual(s) designated responsible for water pollution, dust and erosion controls on the project site. Include home, business, and cellular telephone numbers, fax numbers, and e-mail addresses.
 - 5) Descriptions of the methods and devices used to eliminate certain pollutants (e.g., wastewater, fuels, solvents, detergents, toxic or hazardous substances) from discharging into state waters and drainage systems and provide details of BMP(s) to be installed or utilized. Indicate approximate dates when BMP(s) will be installed and removed.
 - 6) Description of maintenance and subsequent removal of BMP(s).
 - 7) Method(s) of removal and disposal of solid and regulated hazardous wastes encountered or generated during construction. The Contractor is advised to procure regulated hazardous materials on an as-needed basis, as feasible. All excess regulated hazardous materials at the conclusion of this project shall remain the property of the Contractor and shall be removed from HDOT Harbors Division property upon the completion of the project.

- 8) Method(s) of removing and disposing concrete and asphalt pavement cutting slurry, concrete curing water, and hydrodemolition water.
- 9) Method(s) of containing, removing and disposing of demolition dust and debris to minimize the discharge of these pollutants into state waters and drainage systems.
- 10) Spill kit contents and location.
- 11) Fugitive dust control, including dust from grinding, sweeping, or brooming off operations or combination thereof.
- 12) Method(s) of storing and handling of regulated hazardous materials (e.g., oils, paints) and other products used for the project. Safety Data Sheets (SDS) for all regulated hazardous materials used during construction activities shall be kept on-site throughout the duration of the project and readily available upon inspection. All containers of regulated hazardous materials should be provided with secondary containment during storage. Regulated hazardous materials not specifically needed in the execution of this project shall not be brought or stored on site. As feasible, the Contractor is encouraged to use products that do not contain any regulated constituents. The use of green products is encouraged.
- 13) Method(s) of concrete washout/waste control.
- 14) Method(s) of managing material stockpiles to minimize erosion and dust.
- 15) Good housekeeping practices.
 - a) Minimize tracking of sediment offsite from project entrances and exits.
 - b) Litter management. The Contractor shall have a comprehensive housekeeping policy and shall actively enforce housekeeping requirements. Housekeeping items include, but are not limited to, cups, cans, bottles and other forms of lightweight litter, unattended containers of hazardous materials, concrete debris (e.g. dust, chips, and other sweepings), and discarded articles of disposable

Personal Protective Equipment (e.g., earplugs, dust masks, and gloves). Employees who are specifically tasked with housekeeping duties shall be identified by name.

- c) The Contractor should provide and maintain covered waste receptacles. No construction debris or other refuse that is generated as a result of project activities is to be disposed in HDOT Harbors Division-owned waste receptacles.
- 16) Provide plan(s)/drawing(s) showing location of followings when applicable:
- a) Boundaries of the property and the locations where construction activities will occur, including:
 - i. Locations where earth-disturbing activities will occur (noting any sequencing of construction activities);
 - ii. Approximate slopes and drainage patterns with flow arrows before and after the construction;
 - iii. Locations where sediment, soil, or other construction materials will be stockpiled;
 - iv. Locations of any contaminated soil or contaminated soil stockpiles;
 - v. Locations of any crossings of state waters;
 - vi. Designated points on the site where vehicle will exit onto paved roads;
 - vii. Locations of structures and other impervious surfaces upon completion of construction; and
 - viii. Locations of construction support activity areas.
 - b) Locations of all state waters, including wetlands and indicate which water bodies are listed as impaired.

- c) The boundary lines of any natural buffers.
 - d) Topography of the site, existing vegetative cover, and features (e.g., forest, pasture, pavement, structures), and drainage pattern(s) of stormwater onto, over, and from the site property before and after major grading activities.
 - e) Stormwater discharge locations, including locations of any storm drain inlets on-site and in the immediate vicinity of the site to receive stormwater runoff from the project; and locations where stormwater will be discharging to state waters (including wetlands).
 - f) Locations of all potential pollutant-generating activities.
 - g) Locations of stormwater control measures; and
 - h) Locations where chemicals will be used and stored.
- 17) Procedures for notification of appropriate facility personnel, emergency response agencies, and regulatory agencies where a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under either 40 CFR Parts 110, 117, or 302, occurs during a 24-hour period. Contact information must be in locations that are readily accessible and available.
- 18) The Contractor shall date and sign the site-specific BMP Plan.
- b. The Contractor shall keep the accepted Plan on-site or at an easily accessible location throughout the duration of the project. Revisions to the Plan shall be included with the original plan. The Contractor shall obtain written acceptance from the Construction Engineer before revising BMP. An updated Plan shall be kept on-site throughout the remainder duration of the project.

The Contractor shall follow guidelines in the “*The City and County of Honolulu Storm Water Best Management Practice Manual – Construction*,” (dated November 2011) in developing, installing, and maintaining BMP for the project. Additionally, the Contractor shall follow applicable CCH *Rules Relating to Water Quality* **for**

all projects at Honolulu, Kalaehoa Barbers Point, and Kahului Harbors, and use respective Soil Erosion Guidelines for other Maui, Kauai and Hawaii County projects. Information can be found at the respective County websites.

B. Construction Requirements are as follows.

1. No work shall be allowed to begin until submittals detailed in Subsection 14.4 A.2 – Temporary Water Pollution, Dust, and Erosion Control Submittals are completed and accepted in writing by the Construction Engineer. The Contractor shall prevent pollutants from entering state waters. These efforts shall address areas such as those that drain to water, are over water, or drain to storm drains adjacent and in the area of the project site. The Contractor shall design, operate, implement, and maintain the Plan to ensure that stormwater discharges associated with construction activities will not cause or contribute to a violation of applicable state water quality standards.
2. All projects at Honolulu, Kalaehoa Barbers Point, and Kahului Harbors are subject to HDOT Harbors Division SWMP requirements for construction at those harbors unless the project meets a specified exemption class. The requirements include, but are not limited to, construction site BMP initial, recurring (i.e., every two weeks from October through March and every two months otherwise), and final inspections at the frequencies outlined in the SWMP. No grading or land disturbance activities are allowed until the initial BMP inspection is completed and required BMPs are found to be properly installed.
3. Address all comments received from the Construction Engineer.
4. Modify and resubmit plans and construction schedules to correct conditions that develop during construction which were unforeseen during the design and pre-construction stages.
5. Coordinate temporary control provisions with permanent control features throughout the construction and post-construction period.
6. BMP shall be in place and operational until the construction is completed and accepted by Harbors.
7. Install and maintain either or both stabilized construction entrances and wheel washes to minimize tracking of dirt and mud onto roadways. Restrict traffic to stabilized construction areas only. Clean dirt, mud, or other material tracked onto the road immediately. Modify stabilized construction entrances to prevent mud from being tracked onto roadways.

8. Chemicals may be used as soil stabilizers for either or both erosion and dust control if acceptable to the Construction Engineer.
9. Cover exposed surface of materials completely with tarpaulin or similar device when transporting aggregate, soil, excavated material or material that may be a source of fugitive dust.
10. Cleanup and remove any pollutant that can be attributed to the Contractor.
11. Install or modify BMP due to change in the Contractor's means and methods, or for omitted condition that should have been allowed for in the accepted site-specific BMP Plan or a BMP that replaces an accepted site-specific BMP that is not satisfactorily performing.
12. Properly maintain BMP.
13. Remove, replace or relocate any BMP that must be removed, replaced or relocated due to potential or actual flooding, or potential danger or damage to the project or public.
14. The Contractor's designated representative specified in Subsection 14.4 A.2.a.4 shall address any BMP concerns brought up by the Construction Engineer within 24 hours of notification, including weekends and holidays. Should the Contractor fail to satisfactorily address these concerns, the Construction Engineer reserves the right to employ outside assistance or use the Construction Engineer's own labor forces to provide necessary corrective measures. The Construction Engineer will charge the Contractor such incurred costs plus any associated project engineering costs. The Construction Engineer will make appropriate deductions from the Contractor's monthly progress estimate. Failure to apply BMP shall result in either or both the establishment and increase in the amount of retainage due to unsatisfactory progress or withholding of monthly progress payment. Continued failure to apply BMP may result in one or more of the following: The Contractor being fully responsible for all additional costs incurred by HDOT Harbors Division including any fines levied by HDOH, suspension of the Contract, or cancellation of the Contract.

- C. Hydrotesting Activities. If work includes removing, relocation or installing waterlines, and the Contractor elects to flush waterline or discharge hydrotesting effluent into state waters or drainage systems, obtain a Notice of General Permit Coverage (NGPC) authorizing discharges associated with hydrotesting waters from the HDOH Clean Water Branch (CWB). If a permit is required, prepare and submit permit application (CWB-Notice of Intent (NOI) Form F) to the HDOH CWB.

Do not begin hydrotesting activities until the HDOH CWB has issued a NGPC. Hydrotesting operations shall be in accordance with conditions in the NGPC. Submit a copy of the NPDES Hydrotesting Waters Application and Permit to the Construction Engineer.

- D. Dewatering Activities. If excavation of backfilling operations requires dewatering, and the Contractor elects to discharge dewatering effluent into state waters or existing drainage systems, the Contractor shall obtain an NGPC authorizing discharges associated with construction activity dewatering from the HDOH CWB. If a permit is required, prepare and submit permit application (CWB-NOI Form G) to the HDOH CWB.

Do not begin dewatering activities until the HDOH-CWB has issued an NGPC. Conduct dewatering operations in accordance with the conditions in the NGPC. Submit a copy of the NPDES Dewatering Application and Permit to the Construction Engineer.

14.5 PAYMENT - Payment for Temporary Water Pollution, Dust, and Erosion Control shall not be measured and paid for separately but shall be considered incidental to the applicable items described in Article X of these Specifications.

No progress payment will be authorized until the Construction Engineer accepts in writing the site-specific BMP Plan or when the Contractor fails to maintain the project site in accordance with the accepted BMP Plan.

The Contractor shall reimburse the State of Hawaii within 30-day for the full amount of all outstanding costs incurred by the State of Hawaii for all citations or fines received as a result of the Contractor's non-compliance with regulations.

ARTICLE XV – PROJECT PHOTOGRAPHS



Photo 1: Existing Pier 3 to be repaired. View looking north.



Photo 2: Existing Pier 3 to be repaired. View looking northwest.



Photo 3: Existing Pier 3 to be repaired. View looking northwest.

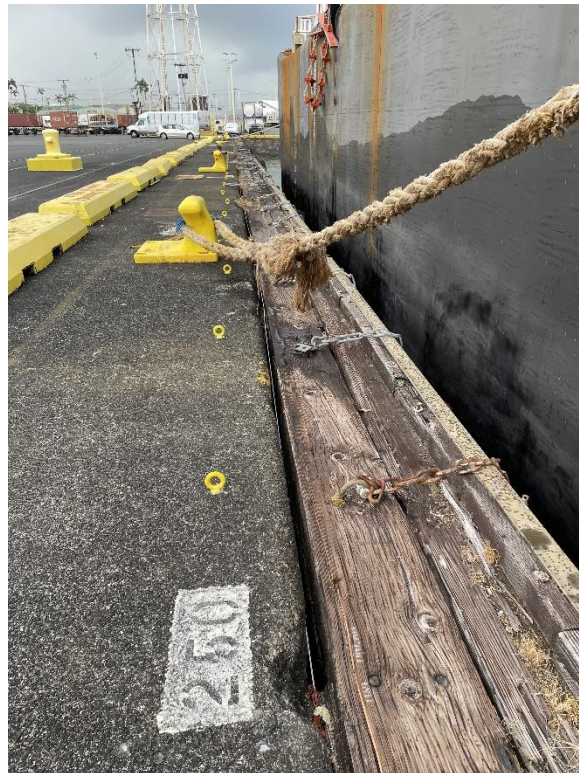


Photo 4: Existing Pier 3 to be repaired. View looking southeast.



Photo 5: Existing Pier 3 to be repaired. View looking southeast.



Photo 6: Existing Pier 3 to be repaired. View looking southeast.

Requirements of Chapter 104, HRS Wages and Hours of Employees on Public Works Law

Chapter 104, HRS, applies to every public works construction project over \$2,000, regardless of the method of procurement or financing (purchase order, voucher, bid, contract, lease arrangement, warranty, SPRB).

Rate of Wages for Laborers and Mechanics

- Minimum prevailing wages (basic hourly rate plus fringe benefits), as determined by the Director of Labor and Industrial Relations and published in wage rate schedules, shall be paid to the various classes of laborers and mechanics working on the job site. [§104-2(a), (b), Hawaii Revised Statutes (HRS)]
- If the Director of Labor determines that prevailing wages have increased during the performance of a public works contract, the rate of pay of laborers and mechanics shall be raised accordingly. [§104-2(a) and (b), HRS; §12-22-3(d) Hawaii Administrative Rules (HAR)]

Overtime

- Laborers and mechanics working on a Saturday, Sunday, or a legal holiday of the State or more than eight hours a day on any other day shall be paid overtime compensation at not less than one and one-half times the basic hourly rate plus the cost of fringe benefits for all hours worked. If the Director of Labor determines that a prevailing wage is defined by a collective bargaining agreement, the overtime compensation shall be at the rates set by the applicable collective bargaining agreement [§§104-1, 104-2(c), HRS; §12-22-4.1, HAR]

Weekly Pay

- Laborers and mechanics employed on the job site shall be paid their full wages at least once a week, without deduction or rebate, except for legal deductions, within five working days after the cutoff date. [§104-2(d), HRS]

Posting of Wage Rate Schedules

- Wage rate schedules with the notes for prevailing wages and special overtime rates, shall be posted by the contractor in a prominent and easily accessible place at the job site. A copy of the entire wage rate schedule shall be given to each laborer and mechanic employed under the contract, except when the employee is covered by a collective bargaining agreement. [§104-2(d), HRS]

Withholding of Accrued Payments

- If necessary, the contracting agency may withhold accrued payments to the contractor to pay to laborers and mechanics employed by the contractor or subcontractor on the job site any difference between the wages required by the public works contract or specifications and the wages received. [§104-2(e), HRS]

Certified Weekly Payrolls and Payroll Records

- A certified copy of all payrolls shall be submitted weekly to the contracting agency. [§104-3(a), HRS; §12-22-10, HAR]
- The contractor is responsible for the submission of certified copies of the payrolls of all subcontractors. The certification shall affirm that the payrolls are correct and complete, that the wage rates listed are not less than the applicable rates contained in the applicable wage rate schedule, and that the classifications for each laborer or mechanic conform with the work the laborer or mechanic performed. [§104-3(a), HRS; §12-22-10, HAR]
- Payroll records shall be maintained by the contractor and subcontractors for three years after completion of construction. The records shall contain: [§104-3(b), HRS; §12-22-10, HAR]
 - the name and home address of each employee
 - the last four digits of social security number
 - a copy of the apprentice's registration with DLIR
 - the employee's correct classification
 - rate of pay (basic hourly rate + fringe benefits)
 - itemized list of fringe benefits paid
 - daily and weekly hours worked
 - weekly straight time and overtime earnings
 - amount and type of deductions
 - total net wages paid
 - date of payment
- Records shall be made available for examination by the contracting agency, the Department of Labor and Industrial Relations (DLIR), or any of its authorized representatives, who may also interview employees during working hours on the job. [§§104-3(c), 104-22(a), HRS; §12-22-10, HAR]

Termination of Work on Failure to Pay Wages

- If the contracting agency finds that any laborer or mechanic employed on the job site by the contractor or any subcontractor has not been paid prevailing wages or overtime, the contracting agency may, by written notice to the contractor, terminate the contractor's or subcontractor's right to proceed with the work or with the part of the work in which the required wages or overtime compensation have not been paid. The contracting agency may complete this work by contract or otherwise, and the contractor or contractor's sureties shall be liable to the contracting agency for any excess costs incurred. [§104-4, HRS]

Apprentices

- Apprentice wage rates apply to contractors who are a party to a bona fide apprenticeship program which has been registered with the DLIR. In order to be paid apprentice rates, apprentices must be parties to an agreement either registered with or recognized as a USDOL nationally approved apprenticeship program by the DLIR, Workforce Development Division, (808) 586-8877, and the apprentice must be individually registered by name with the DLIR. [§12-22-6(1) and (2), HAR]
- The number of apprentices on any public work in relation to the number of journeyworkers in the same craft classification as the apprentices employed by the same employer on the same public work may not exceed the ratio allowed under the apprenticeship standards registered with or recognized by the DLIR. A registered or recognized apprentice receiving the journeyworker rate will not be considered a journeyworker for the purpose of meeting the ratio requirement. [§12-22-6(3), HAR]

Enforcement

- To ensure compliance with the law, DLIR and the contracting agency will conduct investigations of contractors and subcontractors. If a contractor or subcontractor violates the law, the penalties are: [§104-24, HRS]
 - First Violation Equal to 25% of back wages found due or \$250 per offense up to \$2,500, whichever is greater.
 - Second Violation Equal to amount of back wages found due or \$500 for each offense up to \$5,000, whichever is greater.
 - Third Violation Equal to two times the amount of back wages found due or \$1,000 for each offense up to \$10,000, whichever is greater; and
Suspension from doing any new work on any public work of a governmental contracting agency for three years.
- A violation would be deemed a second violation if it occurs within two years of the **first notification of violation**, and a third violation if it occurs within three years of **the second notification of violation**. [§104-24, HRS; §12-22-25(b), HAR]
- **Suspension:** For a first or second violation, the department shall immediately suspend a contractor who fails to pay wages or penalties until all wages and penalties are paid in full. For a third violation, the department shall penalize and suspend the contractor as described above, **except that if the contractor continues to violate the law, then the department shall immediately suspend the contractor for a mandatory three years. The contractor shall remain suspended until all wages and penalties are paid in full.** [§§104-24, 104-25, HRS]
- **Suspension:** Any contractor who fails to make payroll records accessible or provide requested information within 10 days, or fails to keep or falsifies any required record, shall be assessed a penalty including suspension as provided in Section 104-22(b) and 104-25(a)(3), HRS. [§104-3(c), HRS; §12-22-26, HAR]
- If any contractor interferes with or delays any investigation, the contracting agency shall withhold further payments until the delay has ceased. Interference or delay includes failure to provide requested records or information within ten days, failure to allow employees to be interviewed during working hours on the job, and falsification of payroll records. The department shall assess a penalty of \$10,000 per project, and \$1,000 per day thereafter, for interference or delay. [§104-22(b), HRS; §12-22-26, HAR]
- Failure by the contracting agency to include in the provisions of the contract or specifications the requirements of Chapter 104, HRS, relating to coverage and the payment of prevailing wages and overtime, is not a defense of the contractor or subcontractor for noncompliance with the requirements of this chapter. [§104-2(f), HRS]

For additional information, visit the department's website at <http://labor.hawaii.gov/wsd> or contact any of the following DLIR offices:



Oahu (Wage Standards Division).....(808) 586-8777
Hawaii Island(808) 974-6464
Maui and Kauai(808) 243-5322

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HONOLULU, HAWAII

PROPOSAL

PROPOSAL TO THE
STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION

PROJECT: FENDER REPAIRS AT PIER 3, HILO HARBOR,
HAWAII, HAWAII

PROJECT NO.: S50208

COMPLETION TIME: THREE HUNDRED (300) calendar days from the
date indicated in the Notice to Proceed from the
Department.

LIQUIDATED DAMAGES: ONE HUNDRED FIFTY (\$225.00) for each and every
calendar day which the Contractor has delayed the
completion of this project.

PROJECT MANAGER: NAME: JAMES MILLER
DEPARTMENT OF TRANSPORTATION
HARBORS DIVISION
HALE AWA KU MOKU
ADDRESS: 79 S. NIMITZ HWY, HONOLULU HI, 96813
PHONE NO.: (808) 587-1871

ELECTRONIC SUBMITTAL: The bidder shall submit the proposal in HiePRO. The
proposal shall be UPLOADED to HiePRO prior to the bid
opening date and time. See SPECIAL PROVISIONS -
Section 2.8 PREPARATION AND DELIVERY OF BIDS -
for additional information.

Director of Transportation
869 Punchbowl Street
Honolulu, Hawaii 96813

Dear Sir:

The undersigned Bidder declares the following:

1. It has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with this proposal.
2. It has not been assisted or represented on this matter by any individual who has, in a State capacity, been involved in the subject matter of this contract within the past two years.
3. It has not and will not, either directly or indirectly offered or given a gratuity (i.e. an entertainment or gift) to any State or County employee to obtain a contract or favorable treatment under a contract.

The undersigned Bidder further agrees to the following:

1. If this proposal is accepted, it shall execute a contract with the Department to provide all necessary labor, machinery, tools, equipment, apparatus and any other means of construction, to do all the work and to furnish all the materials specified in the contract in the manner and within the time therein prescribed in the contract, and that it shall accept in full payment therefore the sum of the unit and/or lump sum prices as set forth in the attached proposal schedule for the actual quantities of work performed and materials furnished and furnish satisfactory security in accordance with Section 103D-324, Hawaii Revised Statutes, within 10 days after the award of the contract or within such time as the Director of Transportation may allow after the undersigned has received the contract documents for execution, and is fully aware that non-compliance with the aforementioned terms will result in the forfeiture of the full amount of the bid guarantee required under Section 103D-323, Hawaii Revised Statutes.
2. That the quantities given in the attached proposal schedule are approximate only and are intended principally to serve as a guide in determining and comparing the bids.
3. That the Department does not either expressly or by implication, agree that the actual amount of work will correspond therewith, but reserves the right to increase or decrease the amount of any class or portion of the work, or to omit portions of the work, as may be deemed necessary or advisable by the Director of Transportation, and that all increased or decreased quantities of work shall be performed at the unit prices set forth in the attached proposal schedule except as provided for in the specifications.

4. In case of a discrepancy between unit prices and the totals in said Proposal Schedule, the unit prices shall prevail.
5. Agrees to begin work within 10 working days after the date of notification to commence with the work, which date is in the notice to proceed, and shall finish the entire project within the time prescribed.
6. The Director of Transportation reserves the right to reject any or all bids and to waive any defects when in the Director's opinion such rejections or waiver will be for the best interest of the public.

The Bidder acknowledges receipt of and certifies that it has completely examined the following listed items: the Hawaii Department of Transportation, Air and Water Transportation Facilities Division General Provisions for Construction Projects dated 2016, the Notice to Bidders, the Special Provisions, if any, the Technical Provisions, the Proposal, the Contract and Bond Forms, and the Project Plans.

In accordance with Section 103D-323, Hawaii Revised Statutes, this proposal is accompanied with a bid security in the amount of 5% of the total amount bid, in the form checked below. (Check applicable bid security submitted with bid.)

Surety Bid Bond (Use standard form),

Cash,

Cashier's Check,

Certified Check, or

(Fill in other acceptable security.)

The undersigned Bidder acknowledges receipt of any addendum issued by the Department by recording in the space below the date of receipt.

Addendum No. 1 _____

Addendum No. 3 _____

Addendum No. 2 _____

Addendum No. 4 _____

In accordance with Section 103D-302, Hawaii Revised Statutes, the undersigned as Bidder, has listed the name of each person or firm, who will be engaged by the Bidder on the project as a Subcontractor or Joint Contractor and the nature of work to be done by each. The Bidder must adequately and unambiguously disclose the unique nature and scope of the work to be performed by each Subcontractor or Joint Contractor. For each listed firm, the Bidder declares the respective firm is a Subcontractor or Joint Contractor and is subject to evaluation as a Subcontractor or Joint Contractor. It is understood that failure to comply with the aforementioned requirements may be cause for rejection of the bid submitted.

| <u>Name of Subcontractor</u> | <u>Nature and Scope of Work</u> |
|------------------------------|---------------------------------|
| 1. _____ | _____ |
| 2. _____ | _____ |
| 3. _____ | _____ |
| 4. _____ | _____ |
| 5. _____ | _____ |
| 6. _____ | _____ |
| 7. _____ | _____ |
| 8. _____ | _____ |

| <u>Name of Joint Contractor</u> | <u>Nature and Scope of Work</u> |
|---------------------------------|---------------------------------|
| 1. _____ | _____ |
| 2. _____ | _____ |
| 3. _____ | _____ |

("None" or if left blank indicates no Subcontractor or Joint Contractor; if more space is needed, attach additional sheets.)

The undersigned hereby certifies that the bid prices contained in the attached proposal schedule have been carefully checked and are submitted as correct and final.

This declaration is made with the understanding that the undersigned is subject to the penalty of perjury under the laws of the United States and is in violation of the Hawaii Penal Code, Section 710-1063, unsworn falsification to authorities, of the Hawaii Revised Statutes, for knowingly rendering a false declaration.

Bidder (Company Name)

By _____
Authorized Signature

Print Name and Title

Business Address

Business Telephone Email

Date

Contact Person (If different from above)

Phone: _____ Email: _____

NOTE:

If Bidder is a CORPORATION, the legal name of the corporation shall be set forth above, the corporate seal affixed, together with the signature(s) of the officer(s) authorized to sign contracts for the corporation. Please attach to this page current (not more than six months old) evidence of the authority of the officer(s) to sign for the corporation.

If Bidder is a PARTNERSHIP, the true name of the partnership shall be set forth above, with the signature(s) of the general partner(s). Please attach to this page current (not more than six months old) evidence of the authority of the partner authorized to sign for the partnership.

If Bidder is an INDIVIDUAL, the bidder's signature shall be placed above.

If signature is by an agent, other than an officer of a corporation or a partner of a partnership, a POWER OF ATTORNEY must be on file with the Department before opening bids or submitted with the bid. Otherwise, the Department may reject the bid as irregular and unauthorized.

PREFERENCES

Bidders agree that preferences shall be taken into consideration to determine the low bidder in accordance with said Sections and the rules promulgated, however, the award of contract will be in the amount of the bid offered exclusive of any preferences.

A. HAWAII PRODUCTS PREFERENCE

In accordance with ACT 174, SLH 2022, effective June 27, 2022, Hawaii Products Preference shall not apply to solicitations for public works construction. Therefore, the Hawaii Products Preference shall not apply to this project.

B. APPRENTICESHIP PROGRAMS PREFERENCE

In accordance with ACT 17, SLH 2009 – Apprenticeship Program, a 5% bid adjustment for bidders that are parties to apprenticeship agreements pursuant to Hawaii Revised Statutes (HRS) Section 103-55.6 may be applied to the bidder's price for evaluation purposes.

Any bidder seeking this preference must be a party to an apprenticeship agreement registered with the Department of Labor and Industrial Relations at the time the offer is made for each apprenticeable trade the bidder will employ to construct the public works projects for which the offer is being made.

The bidder is responsible for complying with all submission requirements for registration of its apprenticeship program before requesting the preference.

() Yes, I wish to be considered for the Apprenticeship Programs Preference. I have included Certification Form(s) 1 with my bid.

C. RECYCLED PRODUCT PREFERENCE

Recycled product preference shall not apply to this proposal.

FENDER REPAIRS

AT

PIER 3, HILO HARBOR

HILO, HAWAII

S50208

PROPOSAL SCHEDULE

| Item No. | Item Description | Approx. Quantity (a) | Unit | Unit Price (b) | Amount Bid (a x b) |
|--|------------------------------|----------------------|----------|----------------|--------------------|
| 1 | Repair Fender System | 1 Job | Lump Sum | Lump Sum | \$ _____ |
| 2 | Concrete Haunch Spall Repair | 150 | SF | \$ _____ | \$ _____ |
| 3 | Concrete Haunch Full Repair | 6 | Each | \$ _____ | \$ _____ |
| TOTAL AMOUNT FOR COMPARISON OF BIDS..... | | | | | \$ _____ |

NOTES:

Bids shall include all Federal, State, County and other applicable taxes and fees.

The TOTAL AMOUNT FOR COMPARISON OF BIDS will be used to determine the lowest responsible bidder.

Bidders shall complete all unit prices and amounts. Failure to do so may be ground for rejection of bid.

If a discrepancy occurs between unit bid price and the bid price, the unit bid price shall govern.

The bidder shall submit the proposal in HIePRO. The proposal shall be UPLOADED to HIePRO prior to the bid opening date and time. Proposals received after said due date and time shall not be considered. Original (wet ink) proposal documents are not required to be submitted. The award will be made based on proposals uploaded in HIePRO. Any and all other additional documents explicitly designated and labeled as CONFIDENTIAL OR PROPRIETARY shall be UPLOADED SEPARATELY to HIePRO.

Bids will be evaluated on the basis of the TOTAL AMOUNT FOR COMPARISON OF BIDS. If the lowest TOTAL AMOUNT FOR COMPARISON OF BIDS is less than, or approximately equal to the funds available for this project, an award will be made to the lowest responsible bidder.

If the lowest TOTAL AMOUNT FOR COMPARISON OF BIDS exceeds the funds available for this project, the State reserves the right to negotiate with the lowest responsible bidder as permitted under Section 103D-302, Hawaii Revised Statutes, as amended, to reduce the scope of work and award a contract.

Submission of Proposal is a warranty that the bidder has made an examination of the project site and is fully aware of all conditions to be encountered in performing the work and the requirements of the plans and specifications.

No additional compensation will be paid by the State for losses, including overhead and profit, resulting from reduced scope of work.

Contract time shall remain the same whether or not the overall scope of work is decreased.

The bidder must enter all unit prices and amounts otherwise it may affect the awarding of the contract.

SURETY BID BOND

Bond No. _____

KNOW TO ALL BY THESE PRESENTS:

That we, _____
(full name or legal title of offeror)

as Offeror, hereinafter called the Principal, and

(name of bonding company)

as Surety, hereinafter called Surety, a corporation authorized to transact business as a Surety in the State of Hawaii, are held and firmly bound unto

(State/county entity)

as Owner, hereinafter called Owner, in the penal sum of

(required amount of bid security)

Dollars (\$ _____), lawful money of the United States of America, for the payment of which sum well and truly to be made, the said Principal and the said Surety bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS:

The Principal has submitted an offer for

(project by number and brief description)

NOW, THEREFORE:

The condition of this obligation is such that if the Owner shall reject said offer, or in the alternate, accept the offer of the Principal and the Principal shall enter into a contract with the Owner in accordance with the terms of such offer, and give such bond or bonds as may be specified in the solicitation or Contract Documents with good and sufficient surety for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof as specified in the solicitation then this obligation shall be null and void, otherwise to remain in full force and effect.

Signed this _____ day of _____, _____

Name of Principal (Offeror) (Seal)

Signature

Title

Name of Surety (Seal)

Signature

Title

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HONOLULU, HAWAII

SAMPLE FORMS

Contents:

Performance Bond (Surety)

Performance Bond

Labor and Material Payment Bond (Surety)

Labor and Material Payment Bond

Chapter 104, HRS Compliance Certificate

Certification of Compliance for Employment of State Residents, Act 192, SLH 2011

PERFORMANCE BOND (SURETY)
(6/21/07)

KNOW TO ALL BY THESE PRESENTS:

That _____,
(Full Legal Name and Street Address of Contractor)

as Contractor, hereinafter called Principal, and _____

(Name and Street Address of Bonding Company)

as Surety, hereinafter called Surety, a corporation(s) authorized to transact business as a
surety in the State of Hawaii, are held and firmly bound unto the _____,
(State/County Entity)

its successors and assigns, hereinafter called Obligee, in the amount of _____

_____ DOLLARS (\$ _____), to which payment Principal and Surety bind themselves,
their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by
these presents.

WHEREAS, the above-bound Principal has signed a Contract with Obligee on
_____, for the following project: _____

hereinafter called Contract, which Contract is incorporated herein by reference and made a part
hereof.

NOW THEREFORE, the condition of this obligation is such that:

If the Principal shall promptly and faithfully perform, and fully complete the Contract in
strict accordance with the terms of the Contract as said Contract may be modified or amended
from time to time; then this obligation shall be void; otherwise to remain in full force and effect.

Surety to this Bond hereby stipulates and agrees that no changes, extensions of time, alterations, or additions to the terms of the Contract, including the work to be performed thereunder, and the specifications or drawings accompanying same, shall in any way affect its obligation on this bond, and it does hereby waive notice of any such changes, extensions of time, alterations, or additions, and agrees that they shall become part of the Contract.

In the event of Default by the Principal, of the obligations under the Contract, then after written Notice of Default from the Oblige to the Surety and the Principal and subject to the limitation of the penal sum of this bond, Surety shall remedy the Default, or take over the work to be performed under the Contract and complete such work, or pay moneys to the Oblige in satisfaction of the surety's performance obligation on this bond.

Signed this _____ day of _____, _____.

(Seal)

Name of Principal (Contractor)

*

Signature

Title

(Seal)

Name of Surety

*

Signature

Title

***ALL SIGNATURES MUST BE ACKNOWLEDGED
BY A NOTARY PUBLIC**

PERFORMANCE BOND

KNOW TO ALL BY THESE PRESENTS:

That we, _____
(full legal name and street address of Contractor)

as Contractor, hereinafter called Contractor, is held and firmly bound unto the

_____ (State/County entity)

its successors and assigns, as Obligee, hereinafter called Obligee, in the amount

_____ DOLLARS \$ _____),
(Dollar amount of Contract)

lawful money of the United States of America, for the payment of which to the said Obligee, well and truly to be made, Contractor binds itself, its heir, executors, administrators, successors and assigns, firmly by these presents. Said amount is evidenced by:

- Legal Tender;**
- Share Certificate** unconditionally assigned to or made payable at sight to _____
Description: _____;
- Certificate of Deposit**, No. _____, dated _____ issued by _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Cashier's Check** No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Teller's Check** No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Treasurer's Check** No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Official Check** No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Certified Check** No. _____, dated _____ accepted by a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;

WHEREAS:

The Contractor has by written agreement dated _____ entered into a contract with Obligee for the following Project: _____

hereinafter called Contract, which Contract is incorporated herein by reference and made a part hereof.

NOW THEREFORE,

The Condition of this obligation is such that, if Contractor shall promptly and faithfully perform the Contract in accordance with, in all respects, the stipulations, agreements, covenants and conditions of the Contract as it now exists or may be modified according to its terms, and shall deliver the Project to the Obligee, or to its successors or assigns, fully completed as in the Contract specified and free from all liens and claims and without further cost, expense or charge to the Obligee, its officers, agents, successors or assigns, free and harmless from all suits or actions of every nature and kind which may be brought for or on account of any injury or damage, direct or indirect, arising or growing out of the doing of said work or the repair or maintenance thereof or the manner of doing the same or the neglect of the Contractor or its agents or servants or the improper performance of the Contract by the Contractor or its agents or servants or from any other cause, then this obligation shall be void; otherwise it shall be and remain in full force and effect.

AND IT IS HEREBY STIPULATED AND AGREED that suit on this bond may be brought before a court of competent jurisdiction without a jury, and that the sum or sums specified in the said Contract as liquidated damages, if any, shall be forfeited to the Obligee, its successors or assigns, in the event of a breach of any, or all, or any part of, covenants, agreements, conditions, or stipulations contained in the Contract or in this bond in accordance with the terms thereof.

The amount of this bond may be reduced by and to the extent of any payment or payments made in good faith hereunder.

Signed and sealed this _____ day of _____, _____.

(Seal) _____

Name of Contractor

Signature*

Title

*ALL SIGNATURES MUST BE ACKNOWLEDGED BY A NOTARY PUBLIC

LABOR AND MATERIAL PAYMENT BOND (SURETY)
(6/21/07)

KNOW TO ALL BY THESE PRESENTS:

That _____,
(Full Legal Name and Street Address of Contractor)

as Contractor, hereinafter called Principal, and _____

(Name and Street Address of Bonding Company)

as Surety, hereinafter called Surety, a corporation(s) authorized to transact business as a surety in the State of Hawaii, are held and firmly bound unto the _____,
(State/County Entity)

its successors and assigns, hereinafter called Oblige, in the amount of _____

_____ Dollars (\$_____), to which payment Principal and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the above-bound Principal has signed Contract with the Oblige on _____ for the following project: _____

hereinafter called Contract, which Contract is incorporated herein by reference and made a part hereof.

NOW THEREFORE, the condition of this obligation is such that if the Principal shall promptly make payment to any Claimant, as hereinafter defined, for all labor and materials supplied to the Principal for use in the performance of the Contract, then this obligation shall be void; otherwise to remain in full force and effect.

1. Surety to this Bond hereby stipulates and agrees that no changes, extensions of time, alterations, or additions to the terms of the Contract, including the work to be performed thereunder, and the specifications or drawings accompanying same, shall in any way affect its obligation on this bond, and it does hereby waive notice of any such changes, extensions of time, alterations, or additions, and agrees that they shall become part of the Contract.

2. A "Claimant" shall be defined herein as any person who has furnished labor or materials to the Principal for the work provided in the Contract.

Every Claimant who has not been paid amounts due for labor and materials furnished for work provided in the Contract may institute an action against the Principal and its Surety on this bond at the time and in the manner prescribed in Section 103D-324, Hawaii Revised Statutes, and have the rights and claims adjudicated in the action, and judgment rendered thereon; subject to the Obligee's priority on this bond. If the full amount of the liability of the Surety on this bond is insufficient to pay the full amount of the claims, then after paying the full amount due the Obligee, the remainder shall be distributed pro rata among the claimants.

Signed this _____ day of _____, _____.

(Seal)

Name of Principal (Contractor)

*

Signature

Title

(Seal)

Name of Surety

*

Signature

Title

***ALL SIGNATURES MUST BE ACKNOWLEDGED
BY A NOTARY PUBLIC**

LABOR AND MATERIAL PAYMENT BOND

KNOW TO ALL BY THESE PRESENTS:

That we, _____
(full legal name and street address of Contractor)

as Contractor, hereinafter called Contractor, is held and firmly bound unto _____
(State/County entity)

its successors and assigns, as Obligee, hereinafter called Obligee, in the amount
_____ DOLLARS (\$ _____)
(Dollar amount of Contract)

lawful money of the United States of America, for the payment of which to the said Obligee, well and truly to be made, Contractor binds itself, its heir, executors, administrators, successors and assigns, firmly by these presents. Said amount is evidenced by:

- Legal Tender;
- Share Certificate unconditionally assigned to or made payable at sight to _____
Description: _____
- Certificate of Deposit, No. _____, dated _____ issued by _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Cashier's Check No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Teller's Check No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Treasurer's Check No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Official Check No. _____, dated _____ drawn on _____ a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;
- Certified Check No. _____, dated _____ accepted by a bank, savings institution or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration, payable at sight or unconditionally assigned to _____;

WHEREAS:

The Contractor has by written agreement dated _____ entered into a contract with Obligee for the following Project: _____

hereinafter called Contract, which Contract is incorporated herein by reference and made a part hereof.

NOW THEREFORE,

The condition of this obligation is such that, if Contractor shall promptly and faithfully perform the Contract in accordance with, in all respects, the stipulations, agreements, covenants and conditions of the Contract as it now exists or may be modified according to its terms, free from all liens and claims and without further cost, expense or charge to the Obligee, its officers, agents, successors or assigns, free and harmless from all suits or actions of every nature and kind which may be brought for or on account of any injury or damage, direct or indirect, arising or growing out of the doing of said work or the repair or maintenance thereof or the manner of doing the same or the neglect of the Contractor or its agents or servants or the improper performance of the Contract by the Contractor or its agents or servants or from any other cause, then this obligation shall be void; otherwise it shall be and remain in full force and effect.

AND IT IS HEREBY STIPULATED AND AGREED that suit on this bond may be brought before a court of competent jurisdiction without a jury, and that the sum or sums specified in the said Contract as liquidated damages, if any, shall be forfeited to the Obligee, its successors or assigns, in the event of a breach of any, or all, or any part of, covenants, agreements, conditions, or stipulations contained in the Contract or in this bond in accordance with the terms thereof.

AND IT IS HEREBY STIPULATED AND AGREED that this bond shall inure to the benefit of any and all persons entitled to file claims for labor performed or materials furnished in said work so as to give any and all such persons a right of action as contemplated by Sections 103D-324(d) and 103D-324(e), Hawaii Revised Statutes.

The amount of this bond may be reduced by and to the extent of any payment or payments made in good faith hereunder, inclusive of the payments of mechanics' liens which may be filed of record against the Project, whether or not claim for the amount of such lien be presented under and against this bond..

Signed this _____ day of _____, _____.

(Seal) _____

Name of Contractor

Signature*

Title

ALL SIGNATURES MUST BE ACKNOWLEDGED BY A NOTARY PUBLIC

CHAPTER 104, HRS COMPLIANCE CERTIFICATE

The undersigned bidder does hereby certify to the following:

1. Individuals engaged in the performance of the contract on the job site shall be paid:
 - A. Not less than the wages that the director of labor and industrial relations shall have determined to be prevailing for corresponding classes of laborers and mechanics employed on public works projects; and
 - B. Overtime compensation at one and one-half times the basic hourly rate plus fringe benefits for hours worked on Saturday, Sunday, or a legal holiday of the State or in excess of eight hours on any other day.
2. All applicable laws of the federal and state governments relating to workers' compensation, unemployment compensation, payment of wages, and safety shall be fully complied with.

DATED at Honolulu, Hawaii, this _____ day of _____, 20____.

«CONTRACTOR»
Name of Corporation, Partnership, or Individual

Signature and Title of Signer

Notary Seal
NOTARY ACKNOWLEDGEMENT

Subscribed and sworn before me this _____ day of _____
Notary signature _____
Notary public, State of _____
My Commission Expires: _____

Notary Seal
NOTARY CERTIFICATION

Doc. Date: _____ #Pages: _____
Notary Name: _____ Circuit _____
Doc. Description: _____

Notary signature _____
Date _____

**PROVISIONS TO BE INCLUDED IN
CONSTRUCTION PROCUREMENT SOLICITATIONS**

1. Definitions for terms used in HRS Chapter 103B as amended by Act 192, SLH 2011:
 - a. "Contract" means contracts for construction under 103D, HRS.
 - b. "Contractor" has the same meaning as in Section 103D-104, HRS, provided that "contractor" includes a subcontractor where applicable.
 - c. "Construction" has the same meaning as in Section 103D-104, HRS.
 - d. "General Contractor" means any person having a construction contract with a governmental body.
 - e. "Procurement Officer" has the same meaning as in Section 103D-104, HRS.
 - f. "Resident" means a person who is physically present in the State of Hawai'i at the time the person claims to have established the person's domicile in the State of Hawai'i and shows the person's intent is to make Hawai'i the person's primary residence.
 - g. "Shortage trade" means a construction trade in which there is a shortage of Hawai'i residents qualified to work in the trade as determined by the Department of Labor and Industrial Relations.

2. HRS Chapter 103B as amended by Act 192, SLH 2011--Employment of State Residents Requirements:
 - a. A Contractor awarded a contract shall ensure that Hawai'i residents comprise not less than 80% of the workforce employed to perform the contract work on the project. The 80% requirement shall be determined by dividing the total number of hours worked on the contract by Hawai'i residents, by the total number of hours worked on the contract by all employees of the Contractor in the performance of the contract. The hours worked by any Subcontractor of the Contractor shall count towards the calculation for this section. The hours worked by employees within shortage trades, as determined by the Department of Labor and Industrial Relations (DLIR), shall not be included in the calculation for this section.

- b. Prior to award of a contract, an Offeror/Bidder may withdraw an offer/bid without penalty if the Offeror/Bidder finds that it is unable to comply with HRS Chapter 103B as amended by Act 192, SLH 2011.
- c. Prior to starting any construction work, the Contractor shall submit the subcontract dollar amount for each of its Subcontractors.
- d. The requirements of this section shall apply to any subcontract of \$50,000 or more in connection with the Contractor; that is, such Subcontractors must also ensure that Hawai'i residents comprise not less than 80% of the Subcontractor's workforce used to perform the subcontract.
- e. The Contractor and any Subcontractor whose subcontract is \$50,000 or more shall comply with the requirements of HRS Chapter 103B as amended by Act 192, SLH 2011.
 - 1) Certification of compliance shall be made in writing under oath by an officer of the General Contractor and applicable Subcontractors and submitted with the final payment request.
 - 2) The certification of compliance shall be made under oath by an officer of the company by completing a "Certification of Compliance for Employment of State Residents" form and executing the Certificate before a licensed notary public.
 - 3) In addition to the certification of compliance as indicated above, the Contractor and Subcontractors shall maintain records such as certified payrolls for laborers and mechanics who performed work at the site and time sheets for all other employees who performed work on the project. These records shall include the names, addresses and number of hours worked on the project by all employees of the Contractor and Subcontractor who performed work on the project to validate compliance with HRS Chapter 103B as amended by Act 192, SLH 2011. The Contractor and Subcontractors shall retain these records and provide access to the State for a minimum period of four (4) years after the final payment, except that if any litigation, claim, negotiation, investigation, audit or other action involving the records has been started before the expiration of the four-year period, the Contractor and Subcontractors shall retain the records until completion of the action and resolution of all issues that arise from it, or until the end of the four-year period, whichever occurs later. Furthermore, it shall be the Contractor's responsibility to enforce compliance with this provision by any Subcontractor.

- f. A General Contractor or applicable Subcontractor who fails to comply with this section shall be subject to any of the following sanctions:
- 1) With respect to the General Contractor, withholding of payment on the contract until the Contractor or its Subcontractor complies with HRS Chapter 103B as amended by Act 192, SLH 2011.
 - 2) Proceedings for debarment or suspension of the Contractor or Subcontractor under Hawai'i Revised Statutes §103D-702.
3. Conflict with Federal Law: This section shall not apply if the application of this section is in conflict with any federal law, or if the application of this section will disqualify the State from receiving Federal funds or aid.

**CERTIFICATION OF COMPLIANCE
FOR
EMPLOYMENT OF STATE RESIDENTS
HRS CHAPTER 103B, AS AMENDED BY ACT 192, SLH 2011**

Project Title: _____

Agency Project No: _____

Contract No.: _____

As required by Hawai'i Revised Statutes Chapter 103B, as amended by Act 192, Session Laws of Hawaii 2011--Employment of State Residents on Construction Procurement Contracts, I hereby certify under oath, that I am an officer of _____ and
(Name of Contractor or Subcontractor Company)
for the Project Contract indicated above, _____ was in
(Name of Contractor or Subcontractor Company)
compliance with HRS Chapter 103B, as amended by Act 192, SLH 2011, by employing a workforce of which not less than eighty percent are Hawai'i residents, as calculated according to the formula in the solicitation, to perform this Contract.

I am an officer of the **Contractor** for this contract.

I am an officer of a **Subcontractor** for this contract.

CORPORATE SEAL

(Name of Company)

(Signature)

(Print Name)

(Print Title)

Subscribed and sworn to me before this
____ day of _____, 2011.

Doc. Date: _____ # of Pages _____ 1st Circuit

Notary Name: _____

Doc. Description: _____

Notary Public, 1st Circuit, State of Hawai'i
My commission expires: _____

Notary Signature _____ Date

NOTARY CERTIFICATION