

Attachment A. Specifications

This lot is for the fence material described below delivered to Oahu via 40' platform trailer.

Fence Panels (400): Panels will be 4 gauge, 13 horizontal strand, hot dipped galvanized (after welding) combination style panels (16' x 50"). Each bundle shall contain 50 panels. Each panel should weigh approximately 46 lbs for a total package weight of 2300 lbs not including metal strapping and dunnage. Each package shall have a minimum of two 3"x 3"x 50" dunnage spacers for use in offloading via forklift. Panel bundles shall be strapped with metal bands in a minimum of 4 locations along the 16' length.

Tpost (800):

Tpost Specifications-T-133 galvanized steel posts 8' in length. Certified ASTM RR-F-221/3A. Galvanizing per ASTM 123 with Anchor plate. 200 post per bundle.

Smooth Wire (400 lbs):

Smooth wire specification- 9 gauge straight wire Bezinol coating or equivalent Class III coating or better, standard grade, certified to specification ASTM-A-121-86 50lbs per roll.

Hog Rings (10 boxes):

Hog Ring specifications-9 gauge, Bezinol or Galfan hogrings or equivalent, greater than class III coating, 25lb box

Shipping 40' Platform Configuration:


Panel bundles will be stacked 4 bundles high (200 panels total per pile) Two piles of bundles will be staged at each end of the trailer on opposing sides (see attached schematic). Tpost, smooth wire and hog rings will fill the other areas of the trailer.

This bid will serve for potentially numerous lot orders over the course of one year. The estimated quantity is not guaranteed.

Specifications Contact

Christopher Miller

Christopher.J.Miller@hawaii.gov

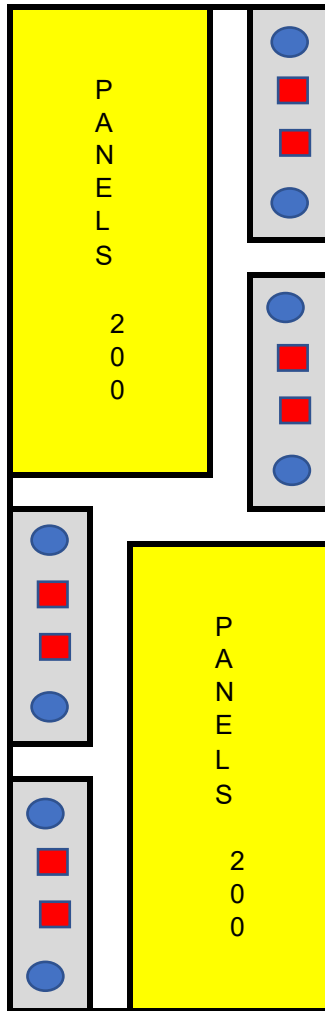

T-POST = 200
SMOOTH WIRE = 2
HOG RINGS = 2 CASES

T-POST = 200
SMOOTH WIRE = 2
HOG RINGS = 2 CASES

T-POST = 200
SMOOTH WIRE = 2
HOG RINGS = 2 CASES

T-POST = 200
SMOOTH WIRE = 2
HOG RINGS = 2 CASES