



INDEX TO DRAWINGS	
SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	STANDARD PLANS SUMMARY
3 - 4	GENERAL NOTES AND LEGEND
5 - 8	WATER POLLUTION & EROSION CONTROL NOTES
9 - 11	GUARDRAIL DETAILS
12	SITE PLAN
13	TYPICAL REPAIR SECTION
14	ROADWAY & PAVEMENT MARKING PLAN

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	1	14

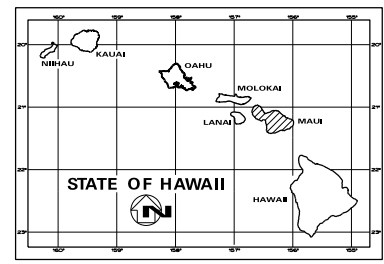

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
HONOLULU, HAWAII

PLANS FOR
**HANA HIGHWAY
EMERGENCY SLOPE REPAIRS,
VICINITY OF WEST KUIAHA ROAD
INTERSECTION**
PROJECT NO. 36C-01-22M
DISTRICT OF MAKAWAO
ISLAND OF MAUI

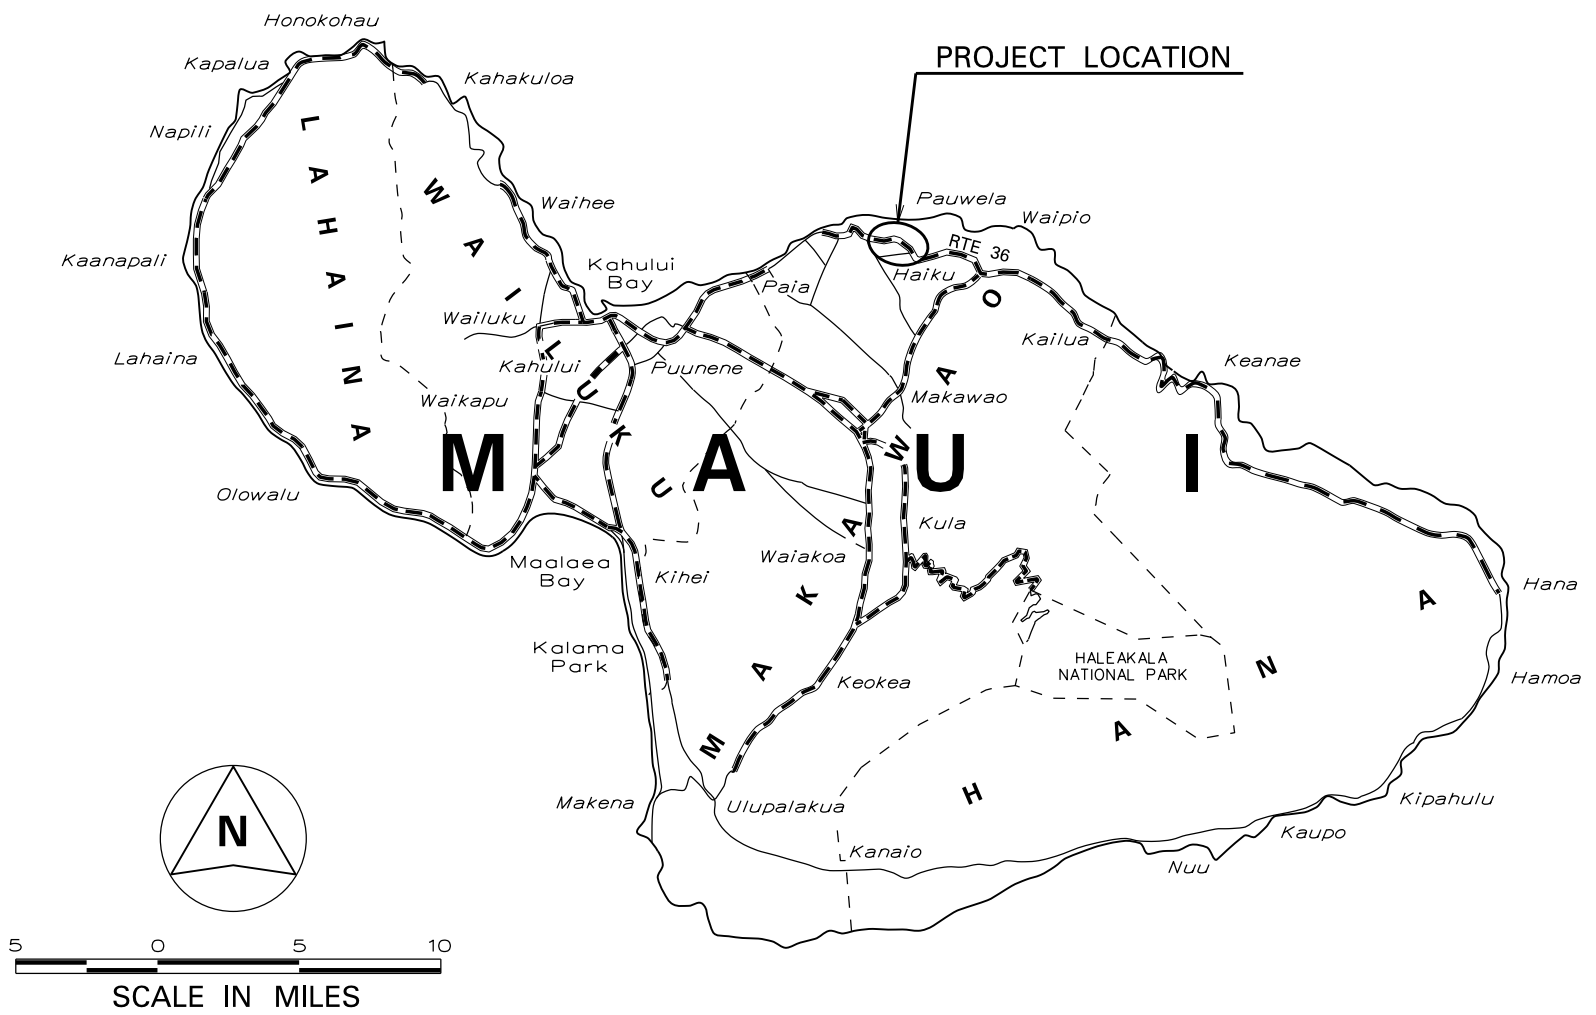

----- FEDERAL AID PROJECTS PREVIOUSLY CONSTRUCTED OR UNDER CONSTRUCTION

MILE POST 12.38 TO MILE POST 12.42

HWY-M DESIGNED BY _____
HWY-M MANAGED BY _____
873-3535 PHONE _____
OCT., 2022 DATE _____

DEPARTMENT OF TRANSPORTATION
STATE OF HAWAII
APPROVED: _____
Feb 10, 2023
DIR. OF TRANSPORTATION DATE

STANDARD PLANS SUMMARY

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	2	14

STANDARD PLAN NO.	TITLE	DATE
B-01	NOTES & MISCELLANEOUS DETAILS	05/31/07
B-03	BACKFILL DETAILS AT EARTH RETAINING STRUCTURES	05/31/07
B-12	PRESTRESSED CONCRETE PILES & COMPRESSION SPLICE CAN DETAILS	05/31/07
B-12A	PRESTRESSED CONCRETE PILES, PILE & COMPRESSION SPLICE CAN DETAILS & NOTES	05/31/07
B-12B	PILE INTERACTION DIAGRAM	05/31/07
B-13	PRESTRESSED CONCRETE PILE BUILD-UP DETAILS	05/31/07

D-01	CATTLE GATE	05/31/07
D-02	CHAIN LINK FENCE WITH TOPRAIL	05/31/07
D-03	CHAIN LINK FENCE WITHOUT TOPRAIL	05/31/07
D-04	WIRE FENCE WITH METAL POSTS	05/31/07
D-05	TYPICAL DETAILS OF CURBS AND/OR GUTTERS	05/31/07
D-06	TYPICAL DETAIL OF REINFORCED CONCRETE DROP DRIVEWAY	05/31/07
D-07	CENTERLINE AND REFERENCE SURVEY MONUMENTS	05/31/07
D-08	STREET SURVEY MONUMENT	05/31/07
D-15	CONCRETE SIDEWALK	05/31/07
D-16	P.C.C. BUS PAD	05/31/07
D-17	P.C.C. BUS PAD	05/31/07
D-18	P.C.C. PAVEMENT LAYOUT	05/31/07
D-19	P.C.C. PAVEMENT W/ PERMEABLE BASE JOINT DETAILS	05/31/07
D-20	P.C.C. PAVEMENT W/ PERMEABLE BASE JOINT DETAILS	05/31/07
D-21	P.C.C. LONGITUDINAL JOINT DETAILS	05/31/07
D-22	P.C.C. CONNECTION TO CURBS AND GUTTERS	05/31/07
D-23	JOINTS	05/31/07

L-01	TREE PLANTING	08/16/06
L-02	TREE PLANTING	08/16/06
L-03	TREE TRANSPLANTING	08/16/06
L-04	PALM PLANTING	08/16/06
L-05	SHRUB PLANTING	08/16/06
L-06	LANDSCAPE DETAILS	08/16/06
L-07	LANDSCAPE DETAILS	08/16/06
L-08	LANDSCAPE DETAILS	08/16/06
L-09	LANDSCAPE DETAILS	08/16/06
L-10	LANDSCAPE DETAILS	08/16/06
L-11	PLANTING NOTES	08/16/06
L-12	IRRIGATION DETAILS	08/16/06
L-13	IRRIGATION DETAILS	08/16/06
L-14	IRRIGATION DETAILS	08/16/06
L-15	IRRIGATION DETAILS	08/16/06
L-16	IRRIGATION DETAILS	08/16/06
L-17	IRRIGATION DETAILS	08/16/06
L-18	IRRIGATION DETAILS	08/16/06
L-19	IRRIGATION DETAILS	08/16/06
L-20	IRRIGATION DETAILS	08/16/06
L-21	IRRIGATION DETAILS	08/16/06
L-22	IRRIGATION DETAILS	08/16/06
L-23	IRRIGATION DETAILS	08/16/06
L-24	IRRIGATION NOTES	08/16/06

STANDARD PLAN NO.	TITLE	DATE
H-01A	TYPE A CATCH BASIN	05/31/07
H-01B	TYPE B CATCH BASIN	05/31/07
H-01C	TYPE C CATCH BASIN	05/31/07
H-01D	TYPE D CATCH BASIN	05/31/07
H-01E	CATCH BASIN SECTIONS	05/31/07
H-02A	TYPE A1 CATCH BASIN	05/31/07
H-02B	TYPE B2 CATCH BASIN	05/31/07
H-02C	TYPE C1 CATCH BASIN	05/31/07
H-02D	TYPE D1 CATCH BASIN	05/31/07
H-02E	CATCH BASIN SECTION	05/31/07
H-03	TYPE A,B, AND C STORM DRAIN MANHOLE	05/31/07
H-04	TYPE D STORM DRAIN MANHOLE	05/31/07
H-05	TYPICAL REINFORCING DETAILS FOR DRAINAGE STRUCTURES	05/31/07
H-06	TYPICAL REINFORCING DETAILS FOR DRAINAGE STRUCTURES	05/31/07
H-07	CATCH BASIN AND MANHOLE CASTINGS	05/31/07
H-08	TYPE 1A-9 AND 1A-9P GRATED DROP INLET	05/31/07
H-09	TYPE 2A-9 AND 2A-9P GRATED DROP INLET	05/31/07
H-10	TYPE A-9 OR A-9P STEEL FRAMES	05/31/07
H-11	TYPE A-9 AND A-9P STEEL GRATES	05/31/07
H-12	TYPE 61614P AND 1211214P GRATED DROP INLET	05/31/07
H-13	TYPE 61616P AND 1211216P GRATED DROP INLET	05/31/07
H-14	TYPE 61214P GRATED DROP INLET	05/31/07
H-15	TYPE 1211214, 1211214P, 1211216, 1211216P STEEL FRAME AND GRATES	05/31/07
H-16	TYPE 61614, 61614P, 61616, 61616P STEEL FRAME AND GRATES	05/31/07
H-17	TYPE 61214 STEEL FRAMES AND GRATES	05/31/07
H-18	TYPE 61214P STEEL GRATES	05/31/07
H-19	TYPE 61614B STEEL FRAME AND GRATES	05/31/07
H-20	CEMENT RUBBLE MASONRY STRUCTURES	05/31/07
H-21	CONCRETE AND CEMENT RUBBLE MASONRY STRUCTURES	05/31/07
H-22	INLET/OUTLET STRUCTURE	05/31/07
H-23	INLET/OUTLET STRUCTURE	05/31/07
H-24	FLARED END SECTION FOR CULVERTS	05/31/07
H-25	FLARED END SECTION FOR CULVERTS	05/31/07
H-26	CONCRETE SPILLWAY INLET	05/31/07
H-27	CAP COUPLING DETAILS STANDARD JOINT	05/31/07
H-28	REINFORCED CONCRETE COLLAR & JACKET	05/31/07
H-29	UNDERDRAIN CLEANOUT STEEL FRAME AND COVER	05/31/07
H-30	UNDERDRAIN CONNECTION TO DRAINAGE STRUCTURE	05/31/07

TE-01	SIGN HEIGHT AND LOCATION	07/11/08
TE-1A	SIGN INSTALLATION	07/11/08
TE-02A	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-02B	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-02C	GALVANIZED FLANGED CHANNEL SIGN POST MOUNTING	05/31/07
TE-03A	GALVANIZED SQUARE TUBE SIGN POST MOUNTING	05/31/07
TE-03B	GALVANIZED SQUARE TUBE SIGN POST MOUNTING	05/31/07
TE-04	REGULATORY SIGNS	07/11/08
TE-05	WARNING SIGNS	07/11/08
TE-06	MISCELLANEOUS SIGNS	07/11/08
TE-07	CONSTRUCTION SIGNS	07/11/08
TE-08	MISCELLANEOUS INTERSECTION SIGNS	07/11/08

STANDARD PLAN NO.	TITLE	DATE
TE-09	BIKE ROUTE SIGN & SUPPLEMENTARY PLATES	07/11/08
TE-10	INTERSTATE ROUTE MARKER	07/11/08
TE-11	STATE ROUTE MARKER AND AUXILIARY MARKERS	07/11/08
TE-12	STATE ROUTE MARKER AND BORDER DETAIL FOR GUIDE SIGNS	07/11/08
TE-12A	ROUTE SIGN ASSEMBLIES	07/11/08
TE-13	STREET NAME SIGN ON MAST ARM	07/11/08
TE-14	MISCELLANEOUS REFLECTOR MARKERS	07/11/08
TE-15	OBJECT MARKERS	07/11/08
TE-16	MILE POSTS	07/11/08
TE-17A	CANTILEVER OVERHEAD SIGN ELEVATION & DETAILS	05/31/07
TE-17B	CANTILEVER SIGN FRAME DETAIL AND SECTION	05/31/07
TE-17C	CANTILEVER SIGN FRAME DETAIL	05/31/07
TE-17D	CANTILEVER SIGN FRAME SECTION	05/31/07
TE-17E	CANTILEVER SIGN FRAME DETAILS	05/31/07
TE-18A	TWO POST OVERHEAD SIGN FRAME ELEVATIONS	05/31/07
TE-18B	TWO POST SIGN FRAMING PLAN SECTION	05/31/07
TE-18C	TWO POST SIGN FRAMING SECTIONS AND DETAILS	05/31/07
TE-18D	TWO POST SIGN FRAME DETAILS	05/31/07
TE-18E	TWO POST SIGN FRAME DETAILS	05/31/07
TE-19A	OVERHEAD SIGN FRAMING SCHEDULE	05/31/07
TE-19B	SIGN POST DRILLED SHAFT FOUNDATION	05/31/07
TE-19C	SPREAD FOOTING	05/31/07
TE-19D	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.1	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.2	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.3	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.4	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19D.5	SIGN FRAME FOUNDATION SCHEDULE	05/31/07
TE-19E	ANCHORAGE DETAILS	05/31/07
TE-19F	ANCHORAGE DETAILS	05/31/07
TE-19G	MISCELLANEOUS SIGN FRAME DETAILS	05/31/07
TE-19H	LUMINAIRE WALKWAY SUPPORT	05/31/07
TE-19J	FIXED MESSAGE LUMINAIRE SUPPORT	05/31/07
TE-19K	MISCELLANEOUS SIGN DETAILS	05/31/07
TE-19L	MISCELLANEOUS SIGN DETAILS	05/31/07
TE-19M	MISCELLANEOUS SIGN FRAME DETAILS	05/31/07
TE-20	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20A	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20B	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-20C	SUPPORTS FOR GROUND MOUNTED GUIDE SIGN	05/31/07
TE-21A	SIGN BREAKAWAY MOUNTS	05/31/07
TE-21B	SIGN BREAKAWAY MOUNTS	05/31/07
TE-22	LAMINATED ALUMINUM SIGN PANELS (OVERHEAD)	05/31/07
TE-23	LAMINATED ALUMINUM SIGN PANELS (GROUND MOUNTED)	07/11/08
TE-24	SOLID ALUMINUM EXTRUDED SIGN PANEL AND ACCESSORY DETAILS	05/31/07
TE-25	GUIDE SIGNS LUMINAIRE MOUNTINGS	05/31/07
TE-26	RAISED PAVEMENT MARKERS AND STRIPING	07/11/08
TE-27	RAISED PAVEMENT MARKERS AND STRIPING	07/11/08
TE-28	ENTRANCE AND EXIT PAVEMENT MARKINGS	07/11/08
TE-28A	MISCELLANEOUS PAVEMENT MARKINGS	07/11/08
TE-29	PAVEMENT ARROWS AND SYMBOLS	07/11/08
TE-30	PAVEMENT ALPHABETS, NUMBERS & SYMBOLS	07/11/08
TE-31	PAVEMENT ALPHABETS, NUMBERS & SYMBOLS	07/11/08

STANDARD PLAN NO.	TITLE	DATE
TE-32	TYPE I & II TRAFFIC SIGNAL SYSTEM MISC. DETAILS	05/31/07
TE-33	TYPE II TRAFFIC SIGNAL SYSTEM	08/16/06
TE-33A.1	TYPE II TRAFFIC SIGNAL STANDARD	05/31/07
TE-33A.2	TYPE II TRAFFIC SIGNAL STANDARD	05/31/07
TE-34	LOOP DETECTOR DETAILS	07/11/08
TE-35	LOOP DETECTORS & DUCT DETAILS	07/11/08
TE-36	TRAFFIC SIGNAL DETAILS	07/11/08
TE-37	PULLBOX & COVER DETAILS	07/11/08
TE-37A	TYPE "A" TRAFFIC PULLBOX	05/31/07
TE-37B	TYPE "A" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37C	TYPE "B" TRAFFIC PULLBOX	05/31/07
TE-37D	TYPE "B" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37E	TYPE "B" TRAFFIC PULLBOX FOUNDATION	05/31/07
TE-37F	TYPE "C" TRAFFIC PULLBOX	05/31/07
TE-37G	TYPE "C" TRAFFIC PULLBOX REINFORCING	05/31/07
TE-37H	TYPE "C" TRAFFIC PULLBOX FOUNDATION	05/31/07
TE-37J	TRAFFIC PULLBOX COVER AND DETAILS	05/31/07
TE-38	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-38A.1	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-38A.2	TYPE III TRAFFIC SIGNAL STANDARD	05/31/07
TE-39	METAL GUARDRAIL CONNECTION TO CONCRETE BARRIER	07/11/08
TE-40	CONCRETE BARRIER TRANSITION	05/31/07
TE-40A	CONCRETE BARRIER TRANSITION SECTIONS	05/31/07
TE-41	GUARDRAIL TYPE 6 (RIGID BARRIER)	05/19/21
TE-41A	GUARDRAIL TYPE 6 (RIGID BARRIER)	05/19/21
TE-41B	GUARDRAIL TYPE 6G (RIGID BARRIER W/GLARE SCREEN)	05/19/21
TE-41C	GUARDRAIL TYPE 6G (RIGID BARRIER W/GLARE SCREEN)	05/19/21
TE-41D	GUARDRAIL TYPE 6 & 6G (RIGID BARRIER)	05/19/21
TE-42	PORTABLE CONCRETE BARRIER	05/31/07
TE-43	PORTABLE CONCRETE BARRIER	05/31/07
TE-44	GUARDRAIL TYPE 4 MISCELLANEOUS DETAILS	07/11/08
TE-45	BARRICADES	07/11/08
TE-46	DELINEATION & PAVEMENT MARKINGS AT NARROW BRIDGES	07/11/08
TE-47	HIGHWAY LIGHT STANDARD	05/31/07

NOTE:

STANDARD PLANS APPLICABLE TO THIS PROJECT ARE INDICATED BY A "●" NEXT TO THE STANDARD PLAN NO. (FOR EXAMPLE: D-07 ●)

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

STANDARD PLANS SUMMARY

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection

Project No. 36C-01-22M

Date: October, 2022

SURVEY PLOTTED BY: _____ DATE: 10/22
 DRAWN BY: _____
 CHECKED BY: _____
 DESIGNED BY: LH
 QUANTITIES BY: _____
 ORIGINAL PLAN: _____
 NOTE BOOK: _____
 me/lay
 4/10/2015/sgl

GENERAL NOTES

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	3	14

- The project includes repairing the eroded slope area above an existing concrete box culvert per recommendations in the Geotechnical Engineering Exploration Report (Aug. 12, 2022), copy included with the contract documents. The slope repair operations involve site preparation (clearing and grubbing), excavation and slope repair preparation (grading), and installation of reinforced soil slope (geogrids and select granular fill) and erosion protection. The project also includes repaving/stripping the roadway shoulder and installing new guardrail.
- The removal of existing guardrail shall include disposal and be considered incidental to various contract items. The installation of new guardrail shall include guardrail sections, guardrail posts, spacer blocks (Standard 8-inch), reflector markers (RM-5), and mounting hardware.
- The Contractor's attention is directed to the following Sections Special Provisions: Section 107.13 - Public Convenience and Safety; Subsection 107.21 - Contractor's Responsibility for Utility Property and Services and Section 645 - Traffic Control.
- Contractor shall submit a Traffic Control Plan (TCP) and schedule at least 15 working days before the start of work for review and approval.
- The existence and location of underground utilities, manholes, monuments and structures as shown on the plans are from the latest available data but the accuracy is not guaranteed. The encountering of other obstacles during the course of work is possible. The Contractor shall be held liable for any damages incurred to the existing facilities and/or improvements as a result of his operations.
- Dressing of shoulder shall consists of clearing, grubbing, grading, reshaping, and compacting the unpaved shoulders with suitable excavated materials as shown on the plans and/or as directed by the Engineer. This work shall be considered incidental to the various contract items.
- All construction signs shall be left in place until all construction items have been completed. Contractor shall obtain prior approval from the Engineer to remove construction signs.
- All lanes shall be open to traffic during the morning peak hours from 6:00 a.m. to 8:30 a.m. during afternoon peak hours from 3:00 p.m. to 6:00 p.m. off work hours. Only one lane of highway shall be closed at any other time.
- The Contractor shall not leave more than 1 1/2" drop-off at the edge of pavement, at the end of each work day. Whenever the Contractor leaves a 1 1/2" drop-off, the Contractor shall install delineators and barricades along the edge of the pavement. This work, which includes furnishing, installing, cleaning, maintaining correct placement and removing when required, shall be considered incidental to various contract items.
- At the end of each day's work, the Contractor shall remove all equipment and other obstructions to permit free and safe passage of public traffic.
- The Contractor shall provide for access to and from all existing sideroads and driveways at all times.
- All new guardrail shall be paved in front, under, beyond and front of end terminals. Prior to installing HMA V, level and remove vegetation and compact existing ground. Refer to Plan Sheet 9.































Section 7 of the Endangered Species Act:

- To avoid impacts to listed Hawaiian seabirds, nighttime construction is not anticipated. If nighttime construction does occur, it shall be scheduled to avoid the seabird fledging period, September 15 through December 15. If nighttime construction occurs during other times of the year, all lighting shall be fully shielded and directed toward the ground so the bulb can only be seen from below to avoid attracting adult seabirds as they travel from the ocean to their breeding areas. Any required outdoor lighting shall have the appropriate automatic motion sensor switches and timer controls to turn off lights when there is no human activity in the vicinity. Where fences extend above vegetation, integrate durable scare tape or bird deterrent into the fence to increase visibility and minimize fence strikes.
- To avoid impacts to the Hawaiian hoary bat, no woody plants (e.g., trees and shrubs) taller than 15 feet shall be trimmed, removed, or disturbed during the hoary bat birthing and pup rearing season, June 1 through September 15.
- To avoid impacts to the Blackburn's sphinx moth, all work will occur on an existing roadway and be within the State highway right-of-way. The shoulder areas within the right-of-way are maintained on a regular basis to limit the growth of vegetation and avoid attraction of the Blackburn's sphinx moth. No critical habitat is located within the State highway right-of-way.
- To avoid impacts to the Hawaiian Stilt, no standing water will be allowed within the construction area(s) to eliminate any water resources.
- No above or below ground utilities will be moved or realigned with this project.
- No highway lighting will be installed or replaced with this project.

HRS Chapter 6E:

- In the unlikely event that subsurface historic resources, including human skeletal remains, structural remains, cultural deposits, artifacts, sand deposits, or sink holes are identified during the demolition and/or construction work, cease work in the immediate vicinity of the find, protect the find from additional disturbance, and contact the State Historic Preservation Division, at (808) 652-1510.

LEGEND

-  Reconstruction Areas
-  Slope Repair Area
-  Existing Electrical Pull Box
-  Existing Electrical Line
-  Existing Joint Pole
-  Existing Power Pole
-  Existing Electric Manhole
-  Existing Telephone Line
-  Existing Telephone Pole
-  Existing Telephone Manhole
-  Existing 12" Water Line
-  Existing Water Manhole
-  Existing Water Air Valve
-  Existing Water Valve Box
-  Existing Water Meter
-  Existing Fire Hydrant
-  Existing Standpipe
-  Existing Sewer Line
-  Existing Sewer Manhole
-  Existing Monument
-  Existing 24" Drain Line
-  Existing Storm Drain Manhole
-  Existing Grated Drop Inlet
-  Existing Catch Basin
-  Existing Traffic Sign
-  New Traffic Sign
-  New Traffic Sign With 2 Posts
-  Existing Street Light
-  Existing Metal Guardrail
-  New Metal Guardrail

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	10/22
me/jay	DESIGNED BY	
me/jay	QUANTITIES BY	
me/jay	CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL NOTES & LEGEND

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M

Date: October, 2022

SHEET No. 1 OF 2 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	4	14

NOTES FOR CONSTRUCTION WITHIN STATE RIGHT-OF-WAY

1. The Contractor shall obtain Permit to Perform Work upon State Highways from the Maui District Engineer, State Highways, at 650 Palapala Drive, prior to commencement of work within the State's highway right-of-way.
2. Removal, construction and restoration of all existing highway facilities within the State's right-of-way, including the legal relations and responsibility to the public, shall be in accordance with the current Hawaii Standard Specifications for Road and Bridge Construction, and the Specifications for Installation of Miscellaneous Improvements within State Highways, of the State Highways Division.
3. Work may not be performed between the peak hours of 6:00 a.m. to 8:30 a.m. and from 3:00 p.m. to 6:00 p.m., Monday through Friday, except State holidays, unless when otherwise approved in writing by the District Engineer.
4. During work hours, only one lane of traffic shall be closed, unless otherwise approved in writing by the District Engineer. All lane closures must be approved by HDOT fifteen (15) working days in advance. All lane closures and detours shall require advisory signs and an advertisement per section 645.03 of the Standard Specifications.
5. At certain locations, "NO LANE CLOSURE" will be allowed during the "Back To School Jam", Thanksgiving weekend, Christmas/New Year Period and at other times as directed by the Highways Division.
6. The Contractor shall provide, install, and maintain all necessary signs, lights flares, barricades, markers, cones, and other protective facilities, and shall take all necessary precautions for the protection, convenience, and safety of public traffic. All such protective facilities and precautions to be taken shall conform with the "Administrative Rules of Hawaii Governing the Use of Traffic Control Devices at Work Sites on or Adjacent to Public Streets and Highways", adopted by the Director of Transportation, and the "U.S. Federal Highway Administration MUTCD - Manual on Uniform Traffic Control Devices, Part VI - Temporary Traffic Control, 2009 Edition",
7. No material and/or equipment shall be stockpiled or otherwise stored within the highway right-of-way, except at locations designated in writing and approved by the District Engineer.
8. The Contractor shall exercise care to minimize damages to existing highway improvements. All damages shall be repaired by the Contractor, at his expense, to the satisfaction of the District Engineer.
9. All regulatory, guide, and construction signs and barricades shall have a high-intensity Type III or IV retroreflective background.
10. The Contractor shall inform the State Highway's Permit Office (873-3535) by noon Wednesday, one week prior to closing any lanes.
11. Driveways shall be kept open unless the owners of the properties using these rights-of-way are otherwise provided for satisfactorily.
12. Where pedestrian walkways exist they shall be maintained in a safe and passable conditions, or other facilities for pedestrians shall be provided. Passages between walkways at intersections shall likewise be provided. All walkways shall conform to ADA requirements.
13. The Contractor shall exercise care when performing work in or adjacent to the State highway right-of-way. Damages to the existing facilities shall be immediately reported to the respective utility companies, and/or City or State agencies. The repair work shall be done at the Contractor's expense.
14. Highway lights shall be operational during construction. Should work be necessary, the contractor shall notify the State Highways' Highway Lighting Supervisor (873-3535), three (3) working days prior to commencing work.
15. The Permit to Perform Work upon State Highways may be revoked because of default in any of the following, but not limited to, conditions:
 - a. Work performed before of after permitted hours.
 - b. Failure to maintain roadway surfaces in a smooth and safe condition.
 - c. Failure to clean up construction debris generated from project work.
 - d. Failure to provide proper traffic control.
 - e. Failure to replace damaged pavement markings and signs.
 - f. Failure to maintain highway lights and traffic signals systems.
 - g. Failure to address public complaints to the satisfaction of the District Engineer.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	10/22
mei,jay	DESIGNED BY	
mei,jay	QUANTITIES BY	
mei,jay	CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M

Date: October, 2022

SHEET No. 2 OF 2 SHEETS

WATER POLLUTION AND EROSION CONTROL NOTES:

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	5	14

A. GENERAL:

- See Special Provisions Section 209 - Water Pollution and Erosion Control. Section 209 describes but is not limited to: submittal requirements; scheduling of a water pollution and erosion control conference with the Engineer; construction requirements; method of measurement; and basis of payment. In addition, Appendix A lists potential pollutant sources and corresponding BMPs used to mitigate the pollutants.
- Follow the guidelines in the current HDOT Construction Best Management Practices Field Manual in developing, installing and maintaining the Best Management Practices (BMP) for the project. For any conflicting requirements between the Manual and applicable bid documents, the applicable bid documents will govern. Should a requirement not be clearly described within the applicable bid documents, the Contractor shall notify the Engineer immediately for interpretation. For the purposes of clarification under Note A.2, "applicable bid documents" include the construction plans, standard specifications, Special Provisions, Permits, and the Storm Water Pollution Prevention Plan (SWPPP) when applicable.
- Follow the guidelines in the Honolulu's City & County "Rules Relating to Soil Erosion Standards and Guidelines" along with applicable Soil Erosion Guidelines for projects on Maui, Molokai, Kauai, and Hawaii.
- The Engineer may assess liquidated damages of up to \$27,500 for non-compliance of each BMP requirement and each requirement stated in Section 209 and special provisions, for every day of non-compliance. There is no maximum limit on the amount assessed per day.
- The Engineer will deduct the cost from the progress payment for all citations received by the Department for non-compliance, or the Contractor shall reimburse the State for the full amount of the outstanding cost incurred by the State.
- If necessary, install a rain gage prior to any field work including the installation of any site-specific best management practices. The rain gage shall have a tolerance of at least 0.05 inches of rainfall. Install the rain gage on the project site in an area that will not deter rainfall from entering the gage opening. Do not install in a location where rain water may splash into rain gage. The rain gage installation shall be stable and plumbed. Do not begin field work until the rain gage is installed and site-specific best management practices are in-place.
- Submit Site-Specific BMP Plan to the Engineer along with a completed Site-Specific BMP Review Checklist within 30 calendar days of contract execution. The Site-Specific BMP Review Checklist may be obtained from <http://www.stormwaterhawaii.com>. Site-Specific BMP Plan shall include placing a sandbag barrier inside the culvert for temporary sediment control (refer to SC-8 in the Construction Best Management Practices Field Manual).
- The Contractor shall consider and install BMP measures which take into account high intensity and prolonged rainfall, and to address the potential problems that may result.
- All areas used in support of construction activities disturbed or damaged by the Contractor, including but not limited to, staging areas, construction entrance/exit, and travel routes, shall be temporarily stabilized during construction in accordance with Section 209 of the 2005 Standard Specifications for Road and Bridge Construction. These areas shall be restored to their original condition or better upon completion of construction. Disturbed and exposed areas shall be permanently stabilized using vegetative cover, pavement, or equivalent to match pre-existing or better condition as approved by the State.
- Final stabilization and restoration of disturbed or damaged areas shall begin immediately as soon as construction is completed and the construction support areas are no longer used.
- The State reserves the right to determine the appropriateness and adequacy of proposed and/or implemented BMPs. Additional BMP measures required by the State shall not be paid for by the State.
- The Contractor shall be responsible for all damages and/or injuries resulting from the BMPs.
- The Contractor shall be responsible for any citations or fines that may be levied as related to the NPDES program on this permit, whether directly levied against the Contractor or the Department of Transportation.

- The Contractor may discuss proposed and implemented BMP measures and the adequacy of them, with District Engineer.

B. WASTE DISPOSAL:

- Waste Materials**
Collect and store all waste materials in a securely lidded metal dumpster or roll off container with cover to keep rain out or loss of waste during windy conditions. The dumpster shall meet all local and State solid waste management regulations. Deposit all trash and construction debris from the site in the dumpster. Empty the dumpster weekly or when the container is two-thirds full, whichever is sooner. Do not bury construction waste materials onsite. The Contractor's supervisory personnel shall be instructed regarding the correct procedure for waste disposal. Post notices stating these practices in the office trailer, on a weatherproof bulletin board, or other accessible location acceptable to the Engineer. The Contractor shall be responsible for seeing that these procedures are followed. Submit the Solid Waste Disclosure Form for Construction Sites to the Engineer within 30 calendar days of contract execution. Provide a copy of all the disposal receipts from the facility permitted by the Department of Health to receive solid waste to the Engineer monthly. This should also include documentation from any intermediary facility where solid waste is handled or processed.
- Hazardous Waste**
Dispose all hazardous waste materials in the manner specified by local, federal or State regulations and by the manufacturer. The Contractor's site personnel shall be instructed in these practices and shall be responsible for seeing that these practices are followed.
- Sanitary Waste**
Collect all sanitary waste from the portable units a minimum of once per week, or as required. Position sanitary facilities where they are secure and will not be tipped over or knocked down.

C. EROSION AND SEDIMENT CONTROL INSPECTION AND MAINTENANCE PRACTICES:

- For projects with an NPDES Permit for Construction Activities, inspect at the following intervals. For construction areas discharging to nutrient or sediment impaired waters, inspect all control measures at least once each week and within 24 hours of any rainfall event of 0.25 inches or greater within a 24 hour period. For construction areas discharging to waters not impaired for nutrient or sediments, inspect all control measures weekly. Inspections are only required during the project's normal working hours. The discharge point water classification may be found in the SWPPP.
- For projects without an NPDES Permit for Construction Activities, inspect all control measures weekly.
- Maintain all erosion and sediment control measures in good working order. If repair is necessary, initiate repair immediately and complete by the close of the next work day if the problem does not require significant repair or replacement, or if the problem can be corrected through routine maintenance. When installation of a new erosion or sediment control or a significant repair is needed, install the new or modified control or complete the repair no later than 7 calendar days from the time of discovery. "Immediately" means the Contractor shall take all reasonable measures to minimize or prevent discharge of pollutants until a permanent solution is installed and made operational. If a problem is identified at a time in the day in which it is too late to initiate repair, initiation of repair shall begin on the following work day.
- Remove built-up sediment from silt fence when it has reached one-third the height of the fence. Remove sediment from other perimeter sediment control devices when it has reached one-half the height of the device.
- Inspect silt screen or fence for depth of sediment, tears, to verify that the fabric is securely attached to the fence posts or concrete slab and to verify that the fence posts are firmly in the ground. Inspect and verify the bottom of the silt screen is buried a minimum of 6 inches below the existing ground.
- Inspect temporary and permanent seeding and planting for bare spots, washouts and healthy growth.
- Complete and submit to the Engineer a maintenance inspection report within 24 hours after each inspection.

ORIGINAL PLAN	DATE
DESIGNED BY	10/22
CHECKED BY	
DATE	
DESIGNED BY	
CHECKED BY	
DATE	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M

Date: October, 2022

WATER POLLUTION AND EROSION CONTROL NOTES (Cont.):

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	6	14

8. Provide a stabilized construction entrance at all points of exit onto paved roads to reduce vehicle tracking of sediments. Include stabilized construction entrance in the Water Pollution, Dust, and Erosion Control submittals. Minimum length should be 50 feet. Minimum width should be 30 feet. Minimum depth should be 12 inches or as recommended by the soils engineer and underlain with geo-textile fabric. If minimum dimensions cannot be met, provide other stabilization techniques that remove sediment prior to exit. Clean the paved street adjacent to the site entrance daily or as required to remove any excess mud, cold-planed materials, dirt or rock tracked from the site. Do not hose down the street without containing or vacuuming wash water. Cover dump trucks hauling material from the construction site with a tarpaulin. Remove sediment tracked onto the street, sidewalk, or other paved area by the end of the day in which the track-out occurs.
9. Include designated Concrete Washout Area(s) in the Water Pollution, Dust, and Erosion Control submittals.
10. Submit the name of a specific individual designated responsible for inspections, maintenance and repair activities and filling out the inspection and maintenance report.
11. Personnel selected for the inspection and maintenance responsibilities shall receive training from the Contractor. They shall be trained in all the inspection and maintenance practices necessary for keeping the erosion and sediment controls used onsite in good working order.
12. Contain, remove, and dispose slurry generated from saw cutting of pavement in accordance with approved BMP practices. Do not allow discharge into the drainage system or State waters.
13. For projects with an NPDES Permit for Construction Activities, immediately initiate stabilizing exposed soil areas upon completion of earth-disturbing activities for areas where earth-disturbing activities have permanently or temporarily ceased. Earth-disturbing activities have permanently ceased when clearing and excavation within any area of the construction site that will not include permanent structures has been completed. Earth-disturbing activities have temporarily ceased when clearing, grading, and excavation within any area of the site that will not include permanent structures will not resume (i.e., the land will be idle) for a period of 14 or more calendar days, but such activities will resume in the future. For construction areas discharging into waters not impaired for nutrients or sediments, complete initial stabilization within 14 calendar days after the temporary or permanent cessation of earth-disturbing activities. For construction areas discharging into nutrient or sediment impaired waters, complete initial stabilization within 7 calendar days after the temporary or permanent cessation of earth-disturbing activities. Classification of water at the discharge point may be found in the SWPPP.
14. For projects without an NPDES Permit for Construction Activities, complete initial stabilization within 14 calendar days after the temporary or permanent cessation of earth-disturbing activities.

D. GOOD HOUSEKEEPING BEST MANAGEMENT PRACTICES:

1. Materials Pollution Prevention Plan

- a. Applicable materials or substances listed below are expected to be present onsite during construction. Other materials and substances not listed below shall be added to the inventory.

Concrete	Cleaning Solvents
Detergents	Wood
Paints (enamel and latex)	Masonry Block
Metal Studs	Herbicides and Pesticides
Tar	Curing Compounds
Fertilizers	Adhesives
Petroleum Based Products	

- b. Use Material Management Practices to reduce the risk of spills or other accidental exposure of materials and substances to storm water runoff. Make an effort to store only enough product as is required to do the job.
- c. Store all materials stored onsite in a neat, orderly manner in their appropriate containers and if possible under a roof or other enclosure.

- d. Keep products in their original containers with the original manufacturer's label.
 - e. Do not mix substances with one another unless recommended by the manufacturer.
 - f. Whenever possible, use a product up completely before disposing of the container.
 - g. Follow manufacturer's recommendations for proper use and disposal.
 - h. Conduct a daily inspection to ensure proper use and disposal of materials onsite.
2. Hazardous Material Pollution Prevention Plan
 - a. Keep products in original containers unless they are not resealable.
 - b. Retain original labels and Safety Data Sheets (SDS), formerly Material Safety Data Sheets (MSDS).
 - c. Dispose of surplus products according to manufacturers' instructions and local and State or Federal regulations.
 3. Onsite and Offsite Product Specific Plan

The following product specific practices shall be followed onsite:

 - a. Petroleum Based Products:

Monitor all onsite vehicles for leaks and perform regular preventive maintenance to reduce the chance of leakage. Store petroleum products in tightly sealed containers which are clearly labeled. Apply asphalt substances used onsite according to the manufacturer's recommendation.
 - b. Fertilizers:

Apply fertilizers used only in the minimum amounts recommended by the manufacturer and federal, state, and local requirements. Avoid applying just before a heavy rain event. Apply at the appropriate time of year for the location, and preferably timed to coincide as closely as possible to the period of maximum vegetation uptake and growth. Once applied, work fertilizer into the soil to limit exposure to storm water. Do not apply to storm conveyance channels with flowing water. Storage shall be in a covered shed or in an area where fertilizer will not come into contact with precipitation or stormwater. Transfer the contents of any partially used bags of fertilizer to a sealable plastic bin to avoid spills.
 - c. Paints:

Seal and store all containers when not required for use. Do not discharge excess paint to the drainage system, sanitary sewer system, or State waters. Dispose properly according to manufacturers' instructions and State and local regulations.
 - d. Concrete Trucks:

Washout or discharge concrete truck drum wash water only at a designated site as far as practicable from storm drain inlets or State waters. Do not discharge water in the drainage system or State waters. Disposal by percolation is prohibited. Clean disposal site as required or as requested by the Engineer.
 4. Spill Control Plan
 - a. Post a spill prevention plan to include measures to prevent and clean up each spill.
 - b. The Contractor shall be the spill prevention and cleanup coordinator. Designate at least three site personnel who shall receive spill prevention and cleanup training. These individuals shall each become responsible for a particular phase of prevention and cleanup. Post the names of responsible spill personnel in the material storage area on a weatherproof bulletin board or other accessible location acceptable to the Engineer and in the office trailer onsite.
 - c. Clearly post manufacturers' recommended methods for spill cleanup. Make site personnel aware of the procedures and the location of the information and cleanup supplies.
 - d. Keep ample materials and equipment necessary for spill cleanup in the material storage area onsite.
 - e. Clean up all spills immediately after discovery.
 - f. Keep the spill area well ventilated. Personnel shall wear appropriate protective clothing to prevent injury from contact with a hazardous substance.

SURVEY PLOTTED BY	DATE
DRAWN BY	10/22
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
ddxx	
ddgn	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS

Vicinity of West Kuiaha Road Intersection

Project No. 36C-01-22M

Date: October, 2022

SHEET No. 2 OF 4 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	7	14

g. Where a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under either 40 CFR Part 110, 40 CFR Part 117, or 40 CFR Part 302 occurs during a 24-hour period, the Contractor shall notify the Engineer as soon as the Contractor has knowledge of the discharge. Note that the reportable quantity for oil and fuel products is a spill of 25 gallons or more, a spill not cleaned within 72 hours, or a spill that threatens ground or surface waters. The Engineer will notify the National Response Center (NRC) at (800) 424-8802, the Clean Water Branch during regular business hours at 586-4309, the Clean Water Branch (DOH-CWB) via email at cleanwaterbranch@doh.hawaii.gov during non-business hours, the DOH Hazard Evaluation and Emergency Response Office at (808) 586-4249, the Coast Guard Maui Station at (808) 986-0023 and the local Emergency Planning Committee at (808) 720-7285. The Contractor shall also provide to the Engineer, within 1 calendar days of knowledge of the release, a description of the release, the circumstances leading to the release, and the date of the release. The Engineer will provide this information to the DOH-CWB. The Engineer will provide information to the NRC if requested.

E. PERMIT REQUIREMENTS:

1. The calculated land disturbance area for this project based on the construction plans is 0.15 acres not including Contractor Staging and Storage areas. If the total of the disturbed area and the Contractor Staging and Storage area is one acre or greater, the Contractor shall obtain the NPDES Construction Activities Permit using HDOT's latest SWPPP template. See Hawaii Administrative Rules Chapter 11-55, Appendix C for the definition of land disturbance. The Contractor shall be responsible for obtaining the required NPDES Construction Activities Permit and complying with the requirements of HAR 11-55 including, but not limited to:
 - a. Deadlines for initiating and completing initial stabilization
 - b. Increased inspection frequency and installation of rain gage if applicable
 - c. Deadlines to initiate and complete repairs to BMPs
 - d. Reporting requirements and corrective action reports
2. Comply with all applicable State and Federal Permit conditions. Permits may include, but not limited to the following:
 - a. NPDES Permit for Construction Activities
 - b. NPDES Permit for Construction Dewatering
 - c. NPDES Permit for Hydrotesting Waters
 - d. Water Quality Certification
 - e. Stream Channel Alteration Permit
 - f. Section 404 Army Corps of Engineer Permit

F. SITE-SPECIFIC BMP REQUIREMENTS:

Each BMP below is referenced to the corresponding section of the current HDOT Construction Best Management Practices Field Manual and appropriate Supplemental Sheets. The Manual may be obtained from the HDOT Statewide Stormwater Management Program Website at <http://www.stormwaterhawaii.com/resources> under Construction Best Management Practices Field Manual. Supplemental BMP sheets are located at http://stormwaterhawaii.com/contractors/contractors_BMPmanual.aspx under Concrete Curing and Irrigation Water.

The requirements for Water Pollution, Dust, and Erosion Control submittals are included in Section 209 of the Hawaii Standard Specifications for Road and Bridge Construction dated 2005 and applicable Special Provisions. A list of pollutant sources and corresponding BMP used to mitigate the pollutants are included in Section 209 of the Special Provisions under Appendix A.

Follow the requirements below:

1. Protect all Drainage Inlets receiving runoff from disturbed areas (SC-1).
2. Contain on-site runoff using Perimeter Sediment Controls
 - a. SC-7 Silt Fence or Filter Fabric Fence
 - b. SC-2 Vegetated Filter Strips and Buffers
 - c. SC-6 Compost Filter Berm/Sock
 - d. SC-8 Sandbag Barrier
 - e. SC-9 Brush or Rock Filter
3. Control offsite runoff from entering construction area
 - a. EC-3 Run-On Diversion
 - b. EC-5 Earth Dikes, Swales, and Ditches
4. Incorporate applicable Site Management BMP
 - a. SM-1 Construction BMP Training
 - b. SM-2 Material Storage and Handling
 - c. SM-3 Stockpile Management
 - d. SM-6 Solid Waste Management
 - e. SM-7 Sanitary Waste Management
 - f. SM-9 Hazardous Materials and Management
 - g. SM-10 Spill Prevention and Control
 - h. SM-11 Vehicle and Equipment Cleaning
 - i. SM-12 Vehicle and Equipment Maintenance
 - j. SM-13 Vehicle and Equipment Refueling
 - k. SM-14 Scheduling
 - l. SM-15 Location of Potential Sources of Sediment
 - m. SM-16 Staging Area
 - n. SM-17 Preservation of Existing Vegetation
 - o. SM-19 Dust Control
 - p. SM-20 Paving Operations
 - q. SM-21 Structure Construction and Painting
5. Contain pollutants within the Construction Staging/Storage Area BMP with applicable Perimeter Sediment Controls and Site Management BMP. Include a Stabilized Construction Entrance/Exit (SC-11) for all areas which exit onto a paved street. Restrict vehicle access to these points.
6. Manage Concrete Waste including installing a Concrete Washout Area (SM-4) and properly disposing of Concrete Curing Water (California Stormwater BMP Handbook NS-12 Concrete Curing).
7. Remove saw cut slurry and hydrodemolition water from the site by vacuuming. Provide storm drain protection and/or perimeter sediment controls during saw cutting and hydrodemolition work.

ORIGINAL PLAN	DATE
NO. _____	10/22
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M

Date: October, 2022

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	8	14

EROSION CONTROL/BEST MANAGEMENT PRACTICES NOTES

1. The Contractor, at his own expense, shall keep the project areas and surrounding areas free from dust nuisance. The work shall be done in conformance with air pollution control standards contained in Hawaii Administrative Rules: Chapter 11-60, "Air Pollution Control".
2. Measures to control erosion and other pollutants shall be in place before any grading work is initiated. These measures shall be properly constructed and maintained throughout the construction period of each site.
3. Construction shall be sequenced to avoid disturbance at all project sites at one time and minimize exposure time of the demolition and reconstruction areas.
4. The Contractor shall observe and comply with the State Department of Health regulations regarding storm water discharge.
5. Inlet protection shall be implemented at all storm drain inlets and catch basins as indicated to prevent any sediment laden runoff from leaving the site. Inlet protection devices shall be removed during any event where flooding could occur if devices remain in place and replaced after the event has passed.
6. Good housekeeping shall be utilized to ensure protection of roadways from mud, dirt, and debris.
7. The Contractor shall provide erosion control measures for their construction, staging, and storage areas and shall inspect and monitor his construction, staging, and storage areas to ensure that no non-storm water discharges are emitted. If such sources are identified the Contractor shall provide immediate mitigative measures.
8. No sediment laden runoff shall leave the site
9. Water trucks shall be utilized to minimize the amount of airborne dust.
10. Contractor shall ensure the proper working order and conduct regular maintenance of all construction equipment. All construction equipment shall be serviced off-site, and no oil or fuel shall be stored on the site.
11. The Contractor shall dispose of equipment and hydraulic oils off-site and in accordance with County, State, and Federal regulations.
12. At the end of the construction, existing catch basins and drain Inlets surrounding the project site shall be inspected and any accumulated sediment and debris found shall be removed. Flushing into the catch basins or drain inlets is prohibited.
13. Construction shall be staged and phased for large projects. Areas of one phase shall be stabilized before another phase is initiated. Stabilization shall be accomplished by temporary or permanent protecting the disturbed soil surface from rainfall impacts and runoff.
14. Storm water flowing toward the construction area shall be diverted by using appropriate control measures, as practical.
15. Water must be discharged in a manner that the discharge shall not cause or contribute to a violation of the basic water quality criteria as specified in the Hawaii Administrative Rules, Section 11-54-04.
16. All grading work shall conform to Maui County Code chapter 20.08 "Soil Erosion and Sediment Control", as amended and applicable provisions of Chapter 54, Water Quality Standards and Chapter 55, Water Pollution Control, Title II, Administrative Rules of the State Department of Health.
17. The Contractor shall schedule construction during the dry weather periods and shall be prepared in case of rainfall events. The Contractor shall provide for temporary bypass or detention of storm water flows or other measures to avoid flooding of properties upstream or adjacent to the site.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	10/22
DESIGNED BY	me/jay	
QUANTITIES BY		
CHECKED BY		

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

WATER POLLUTION & EROSION CONTROL NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS

Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M


Date: October, 2022

SHEET No. 4 OF 4 SHEETS



GENERAL NOTES

- All hardware, posts and fasteners shall be hot-dip zinc coated galvanized after fabrication. No punching, drilling or cutting will be permitted after galvanizing.
- Where conditions require, special post lengths in increments of 6 inches may be specified by the Engineer.
- All fasteners, posts, and rail elements (i.e. FBB03, PWE01, RWM04b, etc.) shall conform to the latest edition and amendments of "A Guide to Standardized Highway Barrier Rail Hardware", a report prepared and approved by the AASHTO-AGC-ARTBA Joint Cooperative Committee, Subcommittee On New Highway Materials, Task Force 13 Report. Dimensions of fasteners, posts and rail elements have been converted from metric units into their present form.
- The Blockout or Offset Block shall be approved by the State.
- All new guardrail systems (system consists of total length of guardrail including both end treatments) shall include the Additional Paved Area.
- After the guardrail posts are installed in the paved area, the Contractor shall fill/seal around each guardrail post and all cracks in the paved area caused during the guardrail post installation. If required by the inspector/engineer, the Contractor shall tamper the paved area around the guardrail post prior to filling/sealing. All costs associated with this work shall not be paid for separately, but shall be considered incidental to the various guardrail items.
- When standards for the fill slope area cannot be met, a site specific, engineer approved design may be used.
- Minimum working width (clear distance) between back of MGS post to any fixed object is 4'-1" (49").
- New Hot Mix Asphalt (HMA) pavement at guardrails shall extend 6 feet longitudinally beyond terminal ends.
- Reflector Markers (RM-5) mounted on guardrails shall be spaced every 25 feet. RM-5's shall not be installed on Terminal Sections. Furnishing and installing of each RM-5 shall be considered incidental to the guardrail system.


GUARDRAIL TYPE	DIMENSION	
	H	A
MGS w/ Standard 8" Offset Block	2'-1"	1'-6"
MGS w/ No Blockout	2'-7/8"	9/4"

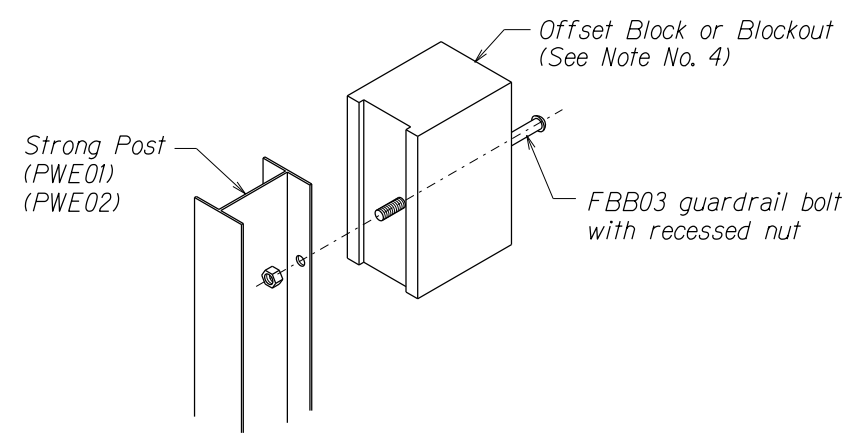

Exploded View
(Rail and washer not shown)
STEEL POST AND BLOCK DETAIL

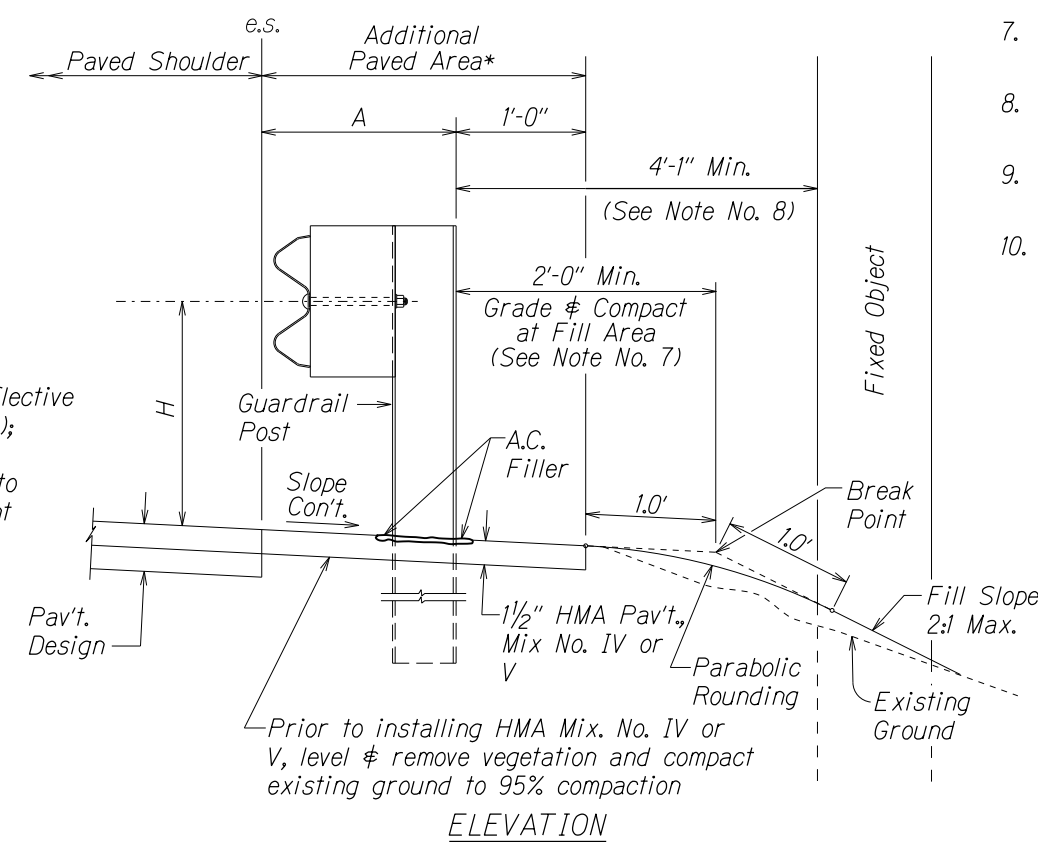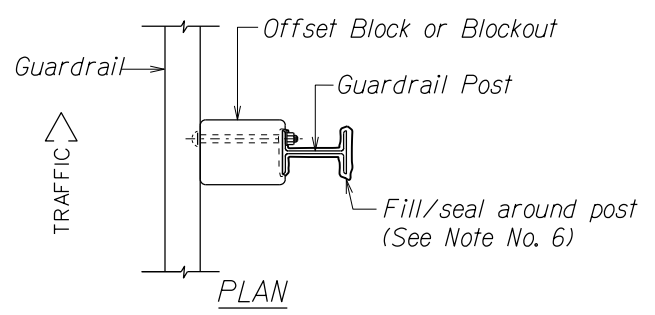

ELEVATION
TYPICAL GUARDRAIL INSTALLATION

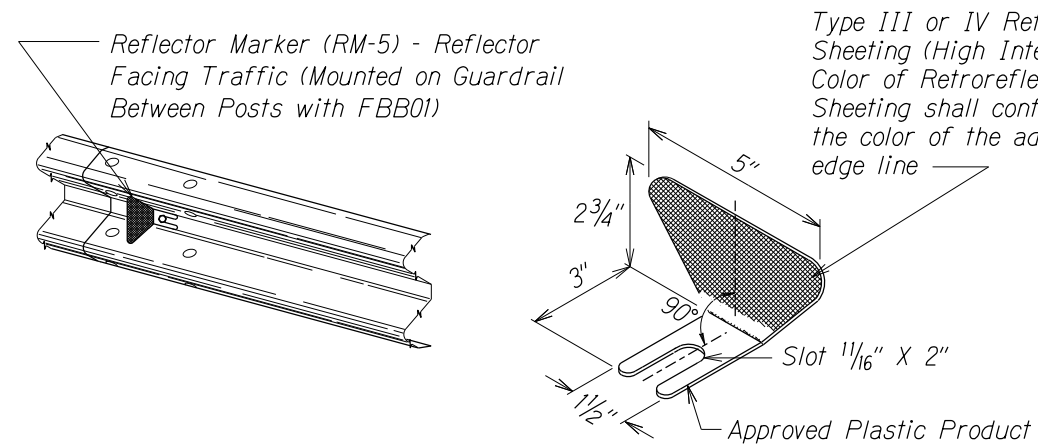

REFLECTOR MARKER (RM-5) DETAIL AND TYPICAL INSTALLATION



STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


GUARDRAIL DETAILS & NOTES

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M




Scale: NTS Date: October, 2022

SHEET No. 1 OF 3 SHEETS


SURVEY PLOTTED BY: DATE: 10/22
 DRAWN BY: LH
 DESIGNED BY: LH
 QUANTITIES BY: LH
 CHECKED BY: LH
 ORIGINAL PLAN No.
 NOTE BOOK No.
 r05/03/18 D:\r05\standards\Traffic Guardrail Standards\archive\ml_1e50rev.dgn

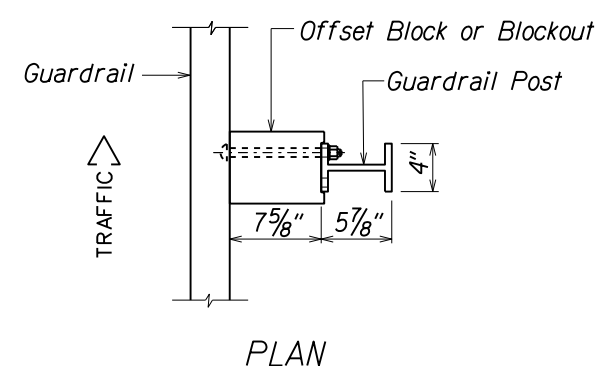


NOTE:
All Holes are
3/4" Dia.

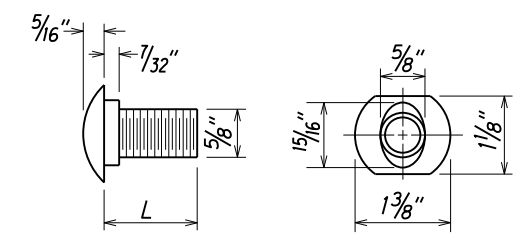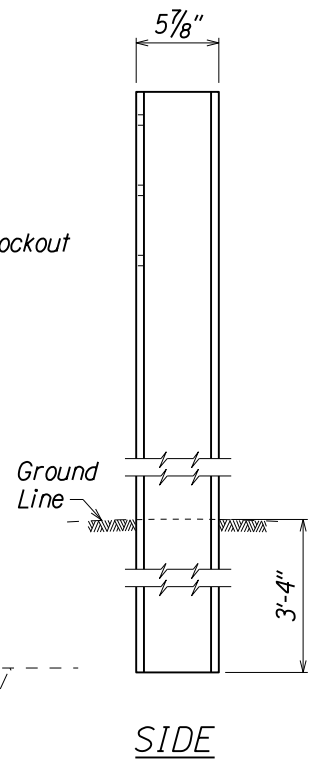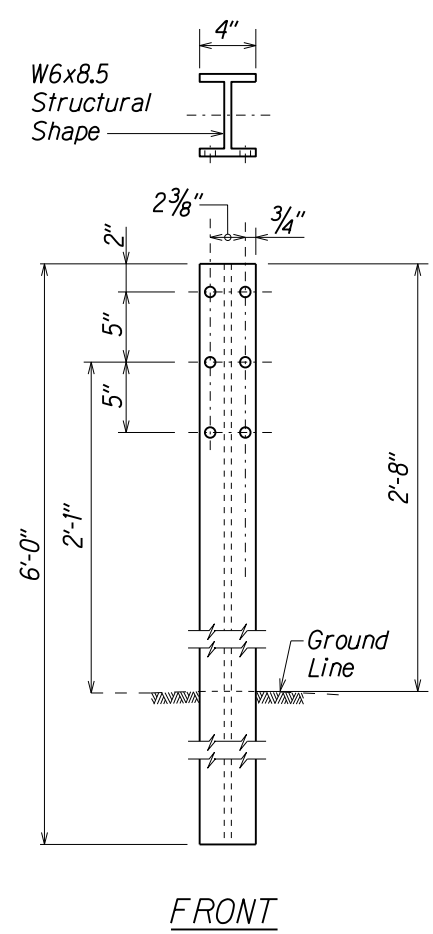

DESIGNATOR	L
FBB01	1 3/8"
FBB02	2"
FBB03	10"

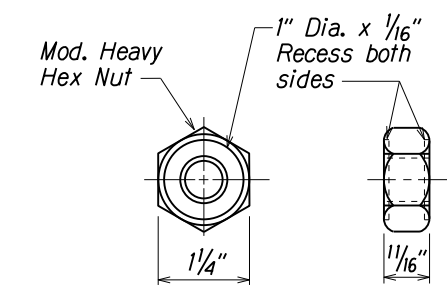



GUARDRAIL BOLTS AND RECESSED NUT

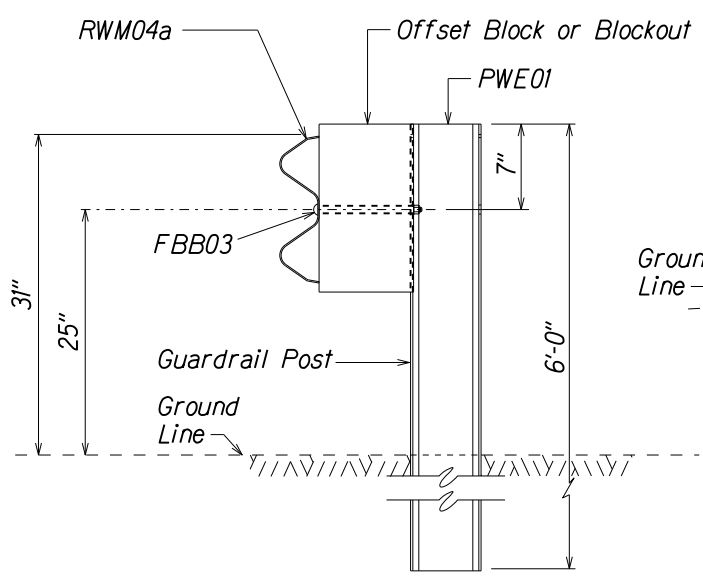

SECTION A-A



WIDE-FLANGED GUARDRAIL POST (PWE01)

DESIGNATOR	BASE METAL THICKNESS
RWM04a	12 Gauge

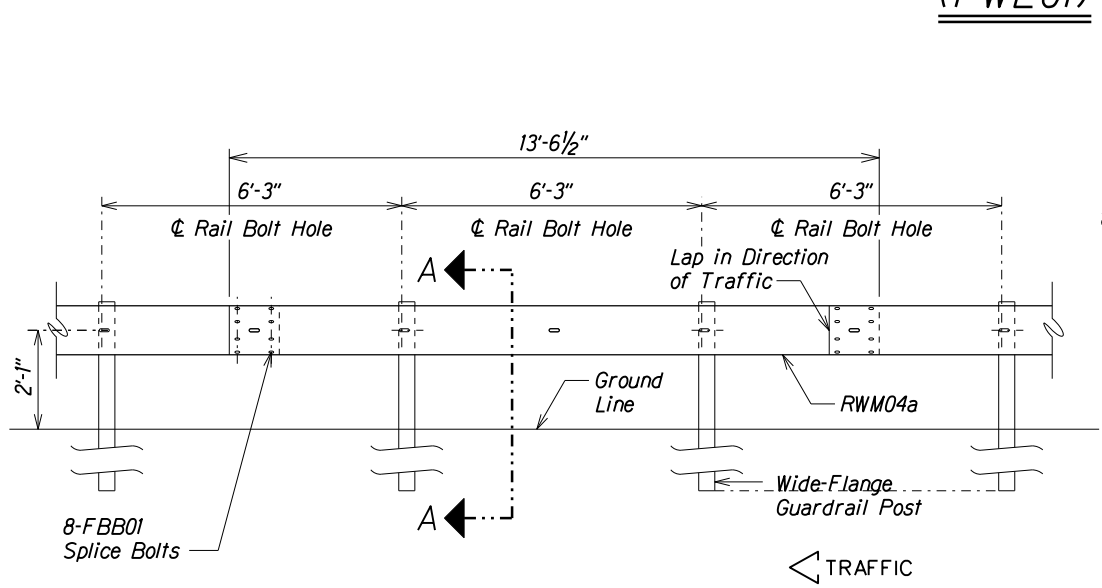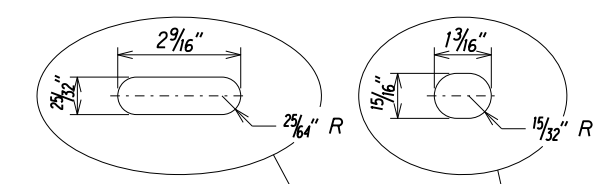

ELEVATION

MIDWEST GUARDRAIL SYSTEM WITH STANDARD 8" OFFSET BLOCK (SGR47)

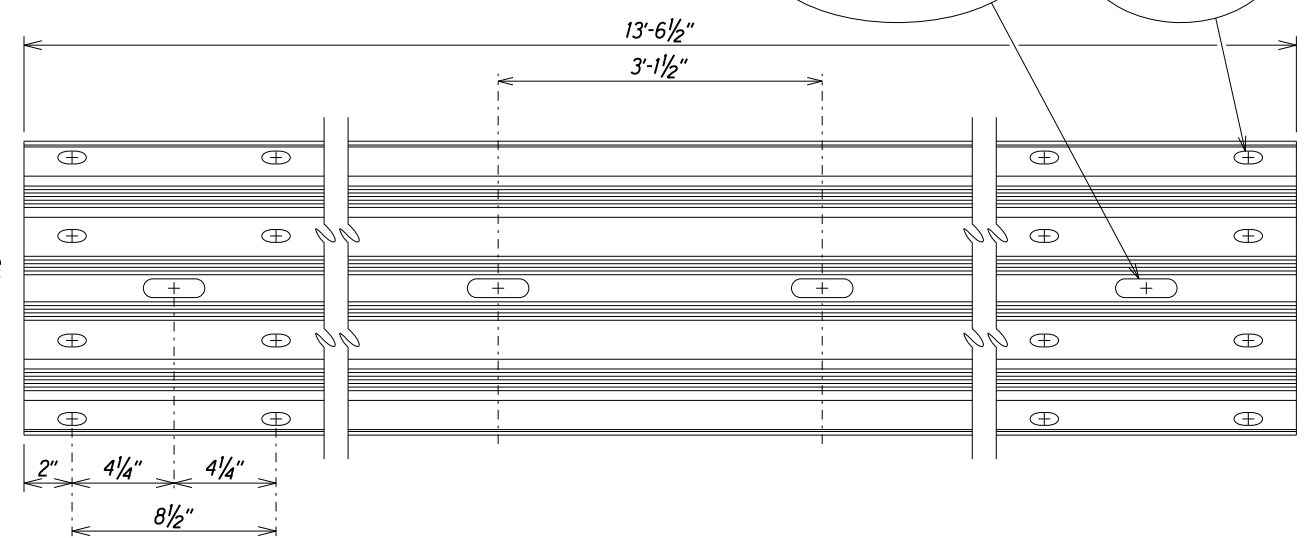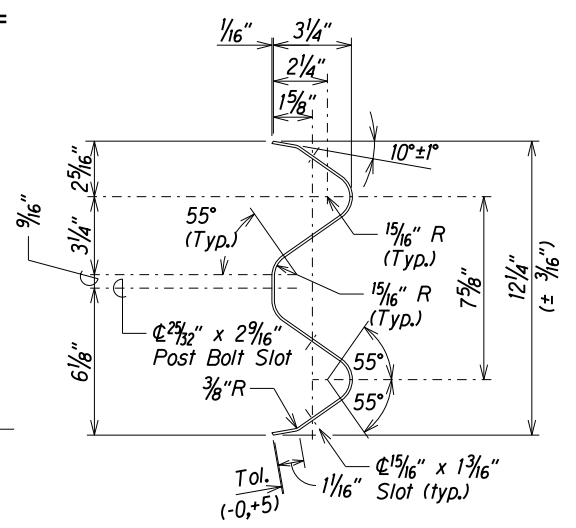

4 SPACE W-BEAM GUARDRAIL (RWM04a)




STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
3" W-BEAM GUARDRAIL WITH STANDARD 8" OFFSET BLOCK
HANA HIGHWAY EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M
Scale: NTS Date: October, 2022
SHEET No. 2 OF 3 SHEETS


DATE: 10/22
DESIGNED BY: LH
CHECKED BY: N
NOTE BOOK
QUANTITIES BY: N

r02/05/20 D:\usr2\Ernest\standards\Traffic Guardrail Standards\archive\m2_wbeamsp.dgn

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	11	14

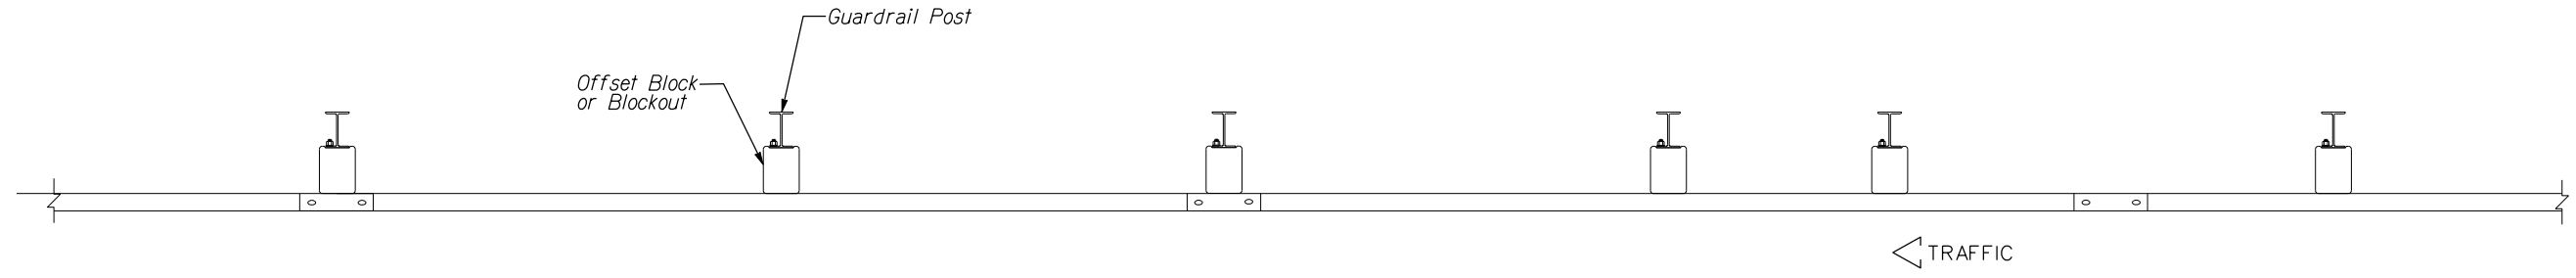

PLAN

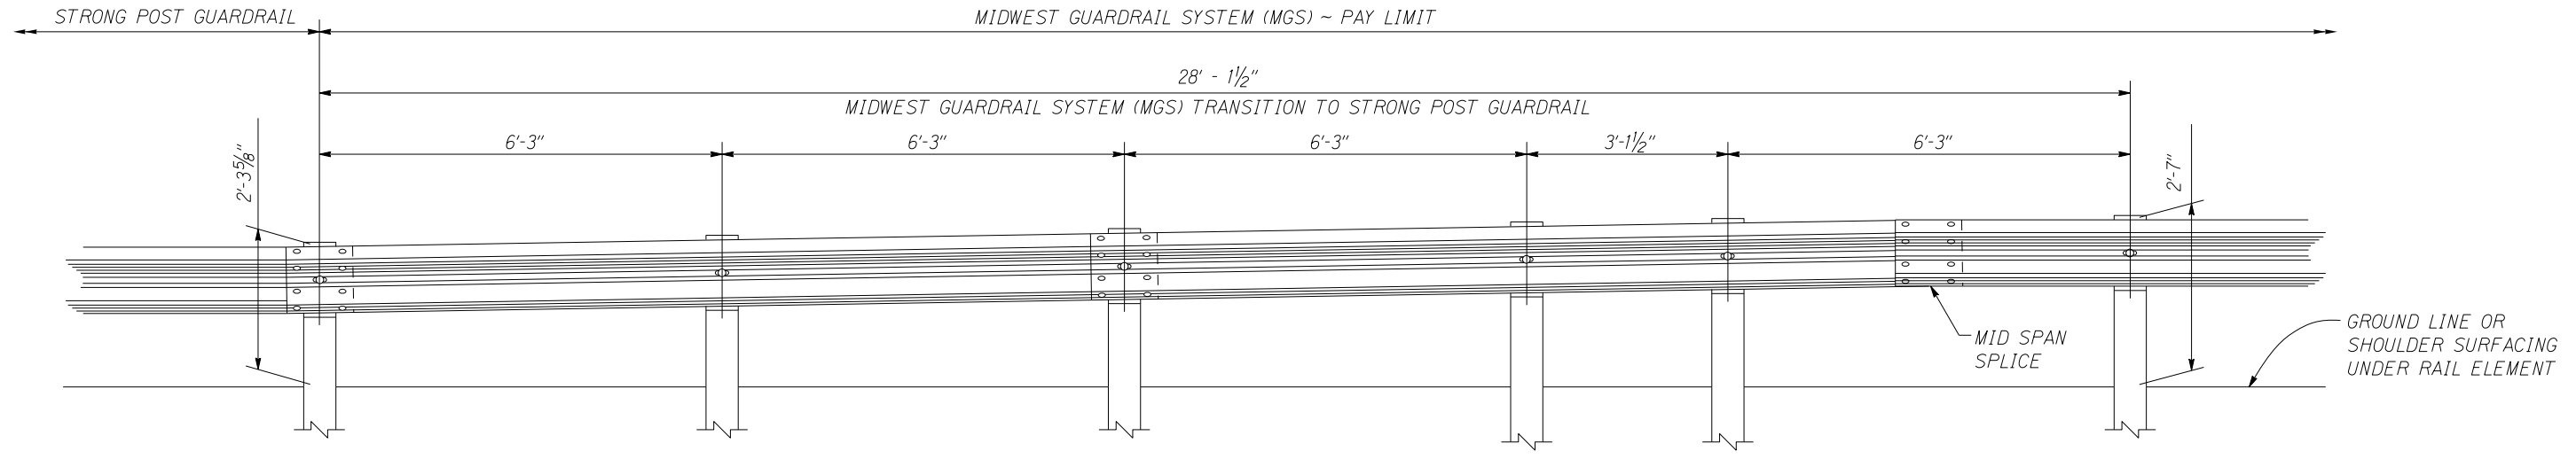

ELEVATION

ORIGINAL PLAN	DATE
NOTED	10/22
DESIGNED BY LH	
QUANTITIES BY	
CHECKED BY	

r09/06/16 D:\st2\Ernest\standards\Traffic Guardrail Standards\ml7_midwest.dgn

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION


**MGS TRANSITION TO
STRONG POST GUARDRAIL**

*HANA HIGHWAY EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M*

Scale: NTS Date: October, 2022

SHEET No. 3 OF 3 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	12	14

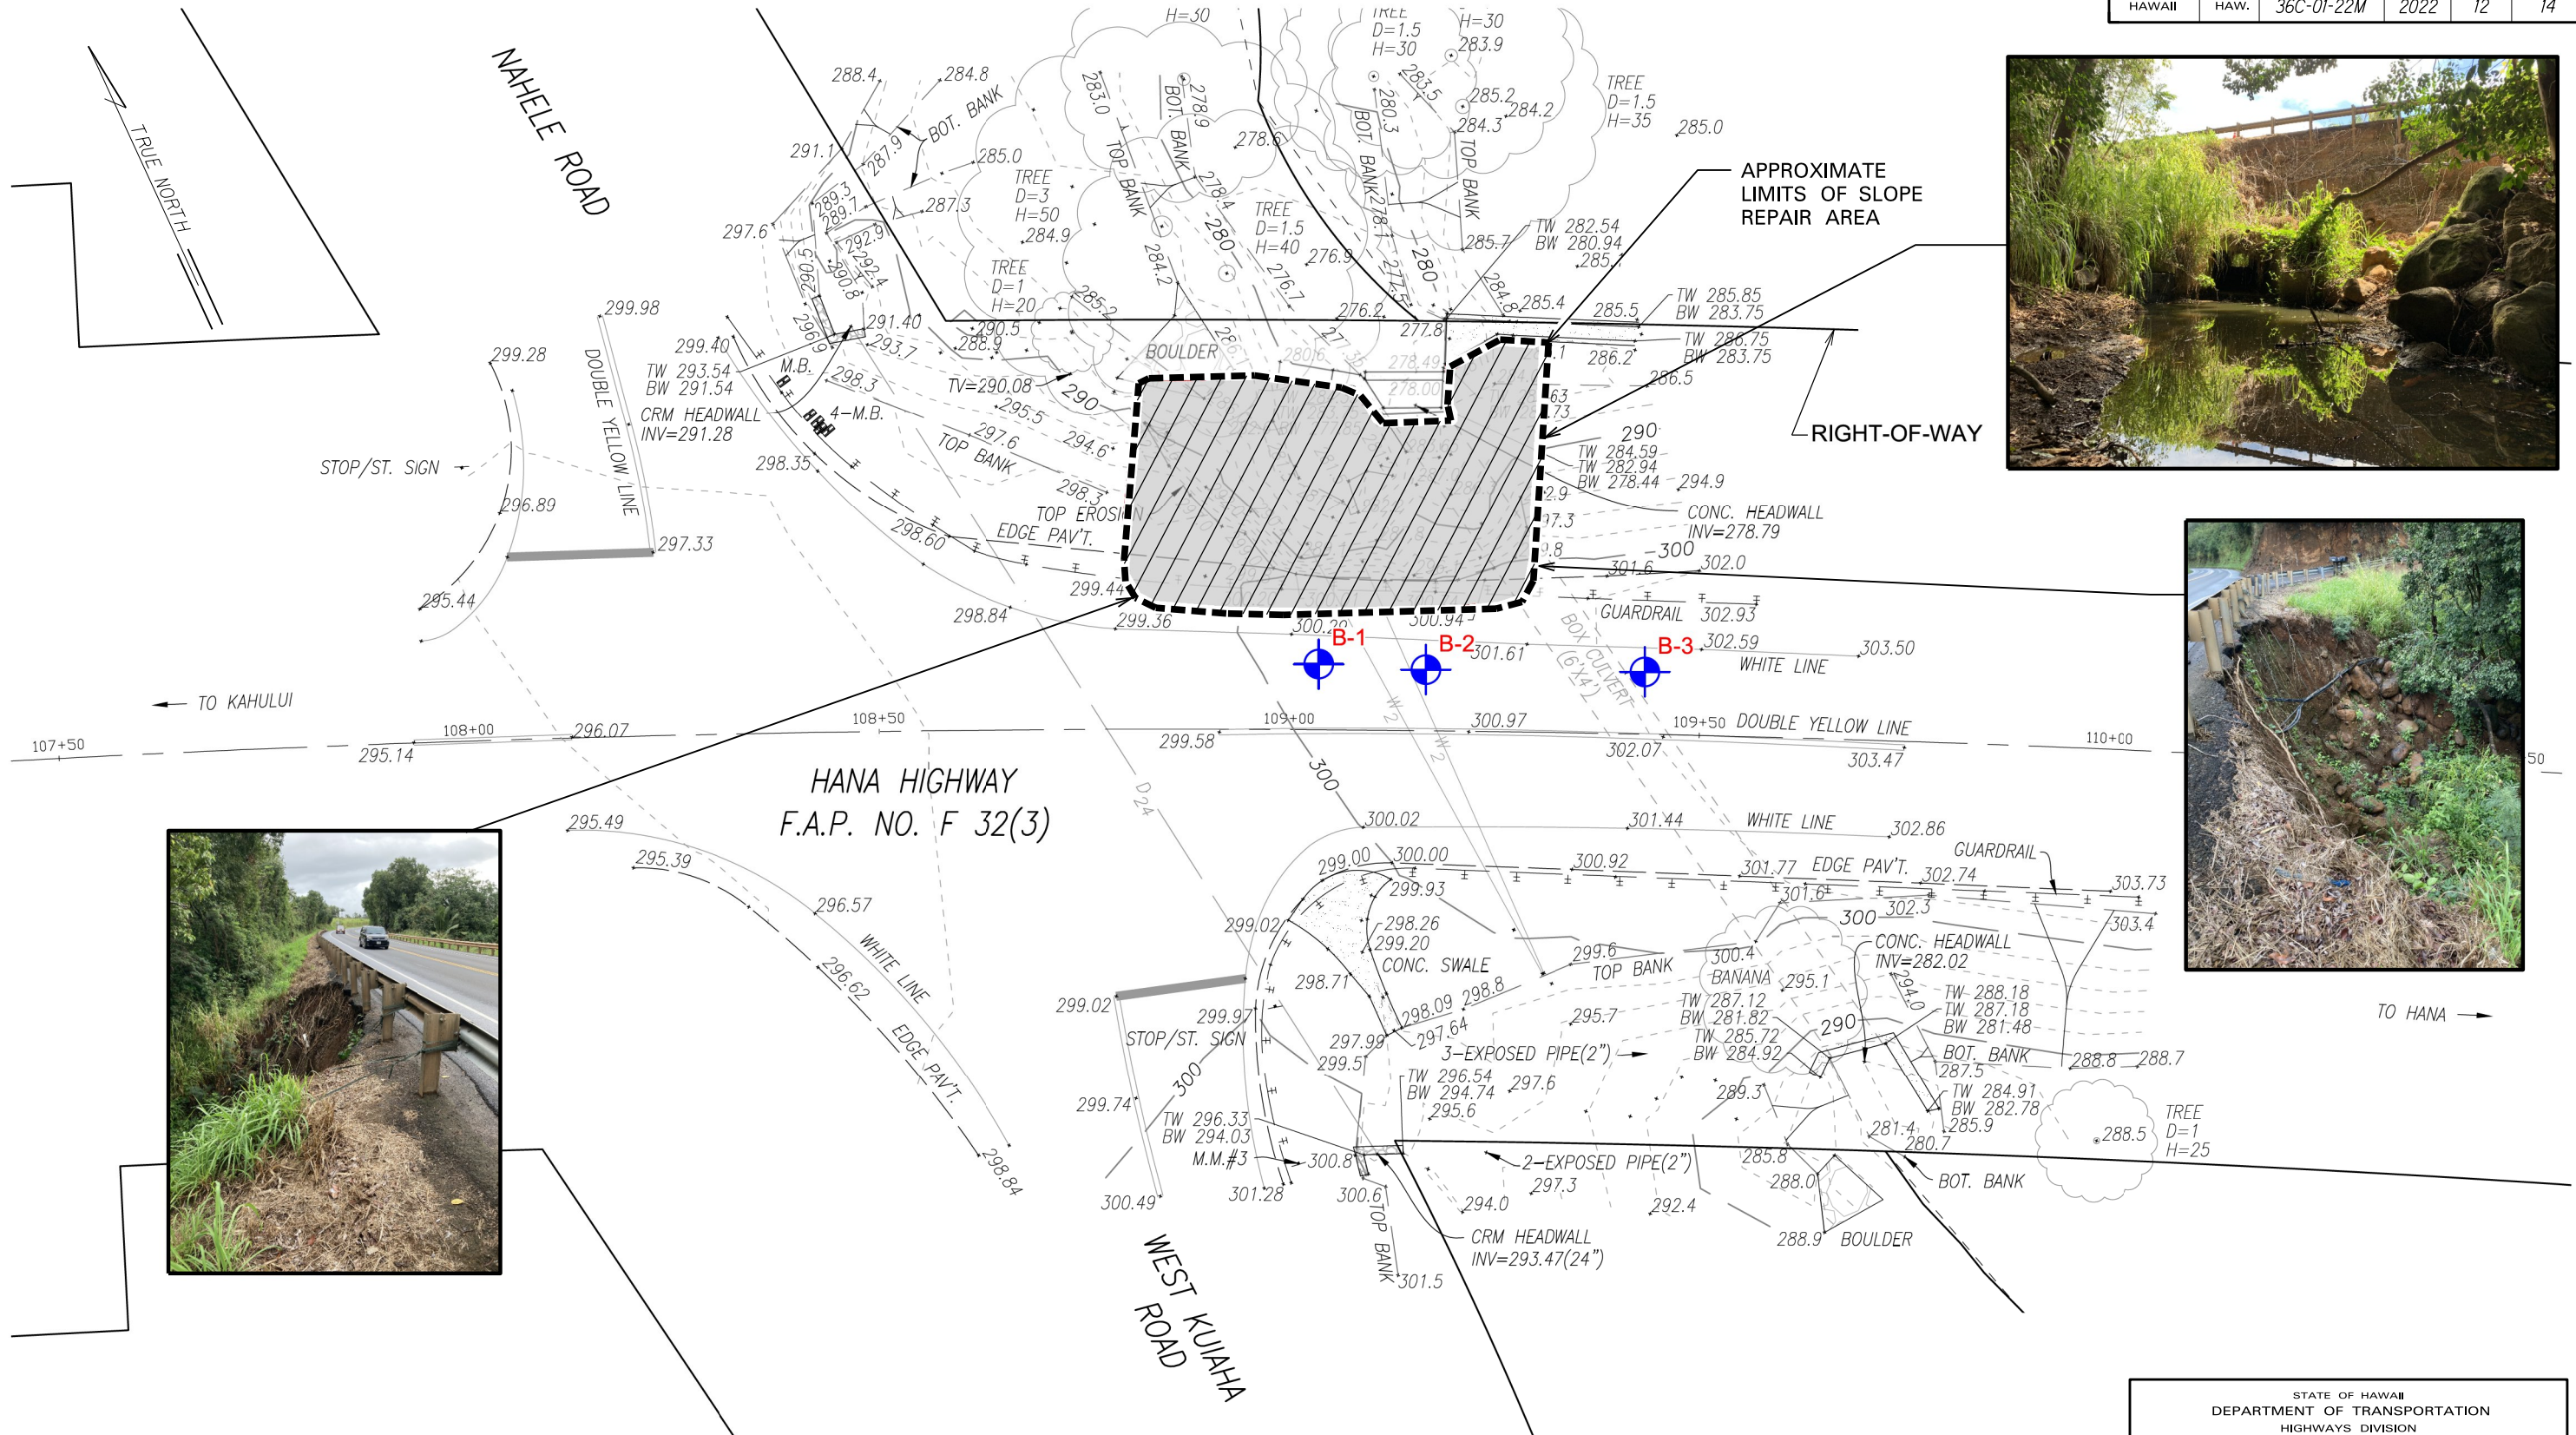

LEGEND:
 APPROXIMATE BORING LOCATION

Source:
 Plate 2 (Site Plan) from the "Geotechnical Engineering Exploration Hana Highway Emergency Slope Repairs Vicinity of West Kuiaha Road Intersection" report (Aug. 12, 2022).



STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION

SITE PLAN
HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
 Vicinity of West Kuiaha Road Intersection
 Project No. 36C-01-22M

Scale: 1" = 20' Date: October, 2022
 SHEET No. 1 OF 1 SHEETS


REFERENCE: TOPOGRAPHIC SURVEY MAP PREPARED BY CONTROLPOINT SURVEYING, INC. DATED MARCH 10, 2022.

DATE	10/22
SURVEY PLOTTED BY	
DRAWN BY	
DESIGNED BY	LH
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
No.	

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	13	14

NOTES:

- Slope repair improvements shall be constructed according to the recommendations presented in the Geotechnical Engineering Exploration report (Geolabs, Inc; Aug. 12, 2022).
- The areas within the grading limits should be thoroughly cleared and grubbed. Vegetation, debris, deleterious materials, and other unsuitable materials should be removed and disposed of properly off-site. The soft/loose overcast materials in front and along the edges of the existing near-vertical slope should be removed to expose the firm in-situ soils.
- Existing irrigation lines extending under the highway are to remain in place, protect during construction (excavation, backfill and slope repair) operations.
- Prior to the placement of the embankment fills, the over-excavated subgrade should be scarified to a depth of at least 12 inches, moisture-conditioned to about 2 percent above the optimum moisture content, and recompacted to a minimum of 90 percent relative compaction.
- Soft and/or yielding areas encountered at the bottom of the over-excavation below areas designated to receive fill should be over-excavated to expose stiff and/or dense materials. The resulting excavation should be backfilled with well-compacted select granular fill materials. The excavated soft and/or organic soils should be disposed of properly off-site.
- Excavations for this project will generally consist of key and bench excavations for the new fills and proposed slope repairs. Care should be exercised not to over-excavate creating overhang and/or unsafe conditions. A support and shoring system should be used to adequately support the near vertical temporary key and bench excavations.
- Fill materials should consist of select granular fill or aggregate base course materials. Select granular fill materials should consist of non-expansive materials, such as crushed basalt or coral. The material should be well-graded from coarse to fine with particles no larger than 3 inches and contain between 10 and 30 percent particles passing the No. 200 sieve. Select granular fill materials should have an angle of internal friction of at least 36 degrees, when tested by the standard direct shear test (ASTM D3080).
- Geosynthetic reinforcement (Tensar UX1100 Geogrids or approved equal) shall be used for primary reinforcement to mechanically stabilize and reinforce the slope fill materials. Intermediate geogrid reinforcement (Tensar BX110 or approved equal) shall be placed between the primary reinforcement layers as shown (min. length of 5 feet and vertical spacing of 12 inches). As the slope is constructed, the horizontal layers of geogrids shall be placed in the compacted fill. Install the geosynthetic reinforcement according to the manufacturer's specifications and recommendations.
- Fills to be placed should be keyed into stiff natural material and benched into the existing slope to provide stability of the new fill materials against sliding. The filling operations should start at the lowest point and continue up in level horizontal compacted layers. Fill slopes should be constructed by overfilling and cutting back to the design slope ratio to obtain a well-compacted slope face. Fill materials should be placed in level lifts not exceeding 8 inches in loose thickness, moisture-conditioned to above the optimum moisture content and compacted to at least 90 percent relative compaction (ASTM D1557).
- Slope planting and turf reinforcement matting (North American Green C350 or approved equal) should be provided as soon as the fill slope is completed. The slope face should be properly graded and compacted prior to placing the matting. Anchor trenches should be installed to anchor matting ends. The anchor trenches should be properly backfilled and compacted to 90 percent relative compaction. The turf reinforcement matting may be anchored at the overlaps by metal staples. Wood anchors (pegs or stakes) extending above the ground surface should not be allowed.
- Refer to the Roadway & Pavement Marking Plan (Sheet 14) for the installation of roadway shoulder AC paving, striping, and new guardrails.

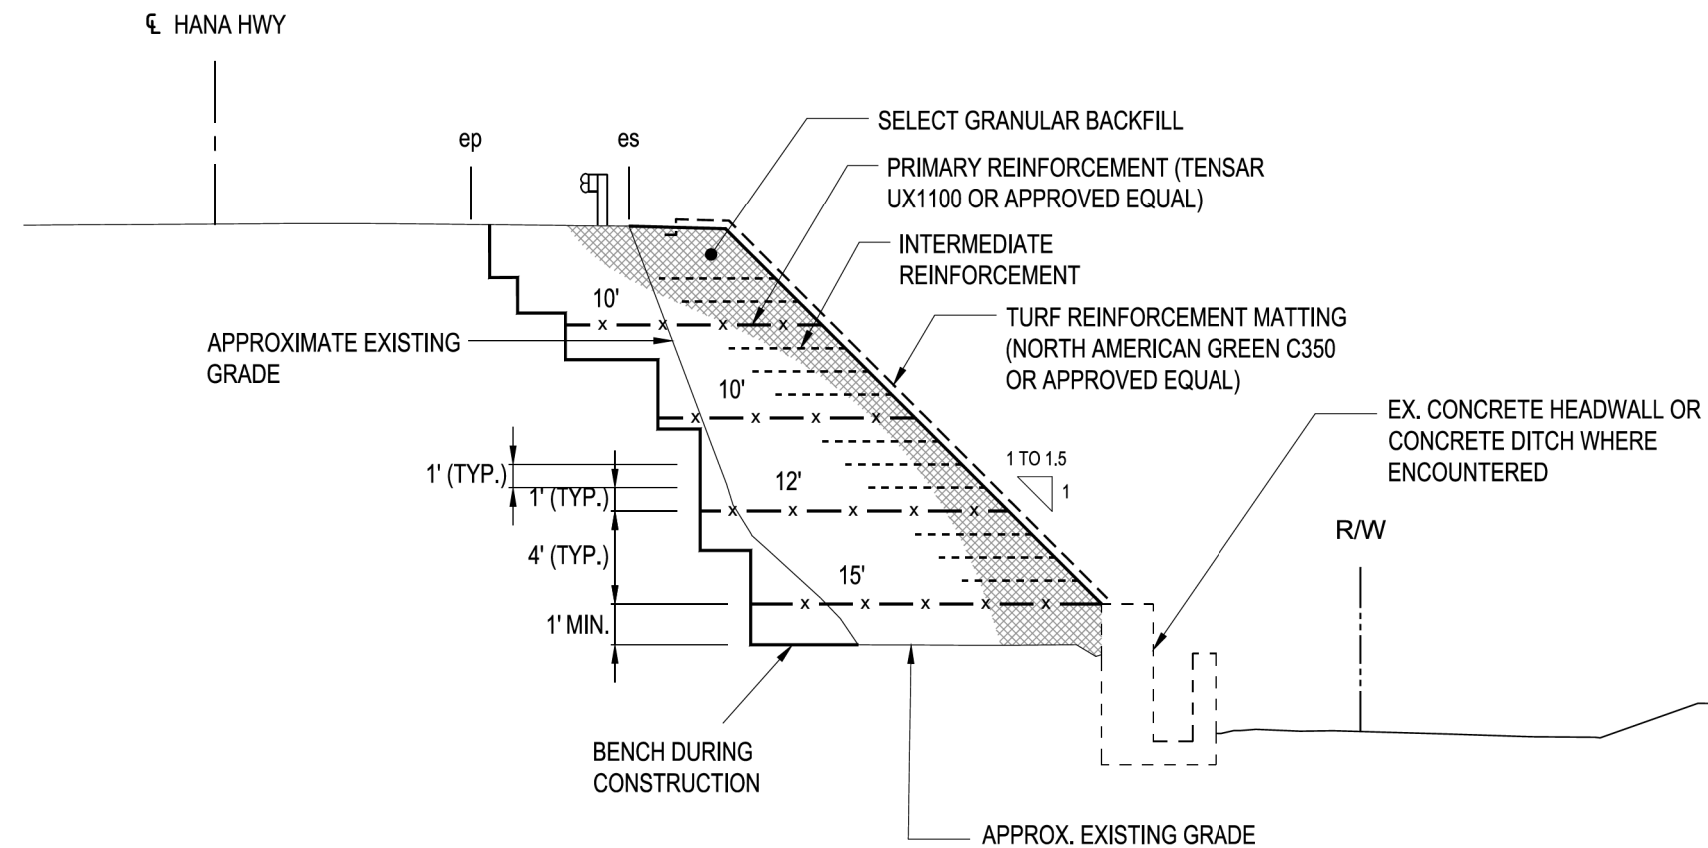

**TYPICAL SECTION -
REINFORCED SOIL SLOPE**
NOT TO SCALE

DATE	10/22
SURVEY PLOTTED BY	
DRAWN BY	LH
DESIGNED BY	LH
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
me/jay	
me/jay	

Source:
Plate 3 (Typical Section - Reinforced Soil Slope) from the "Geotechnical Engineering Exploration Hana Highway Emergency Slope Repairs Vicinity of West Kuiaha Road Intersection" report (Aug. 12, 2022).


STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

TYPICAL REPAIR SECTION
HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M
Date: October, 2022

SHEET No. 1 OF 1 SHEETS

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	36C-01-22M	2022	14	14

TRUE NORTH
SCALE: 1" = 20'

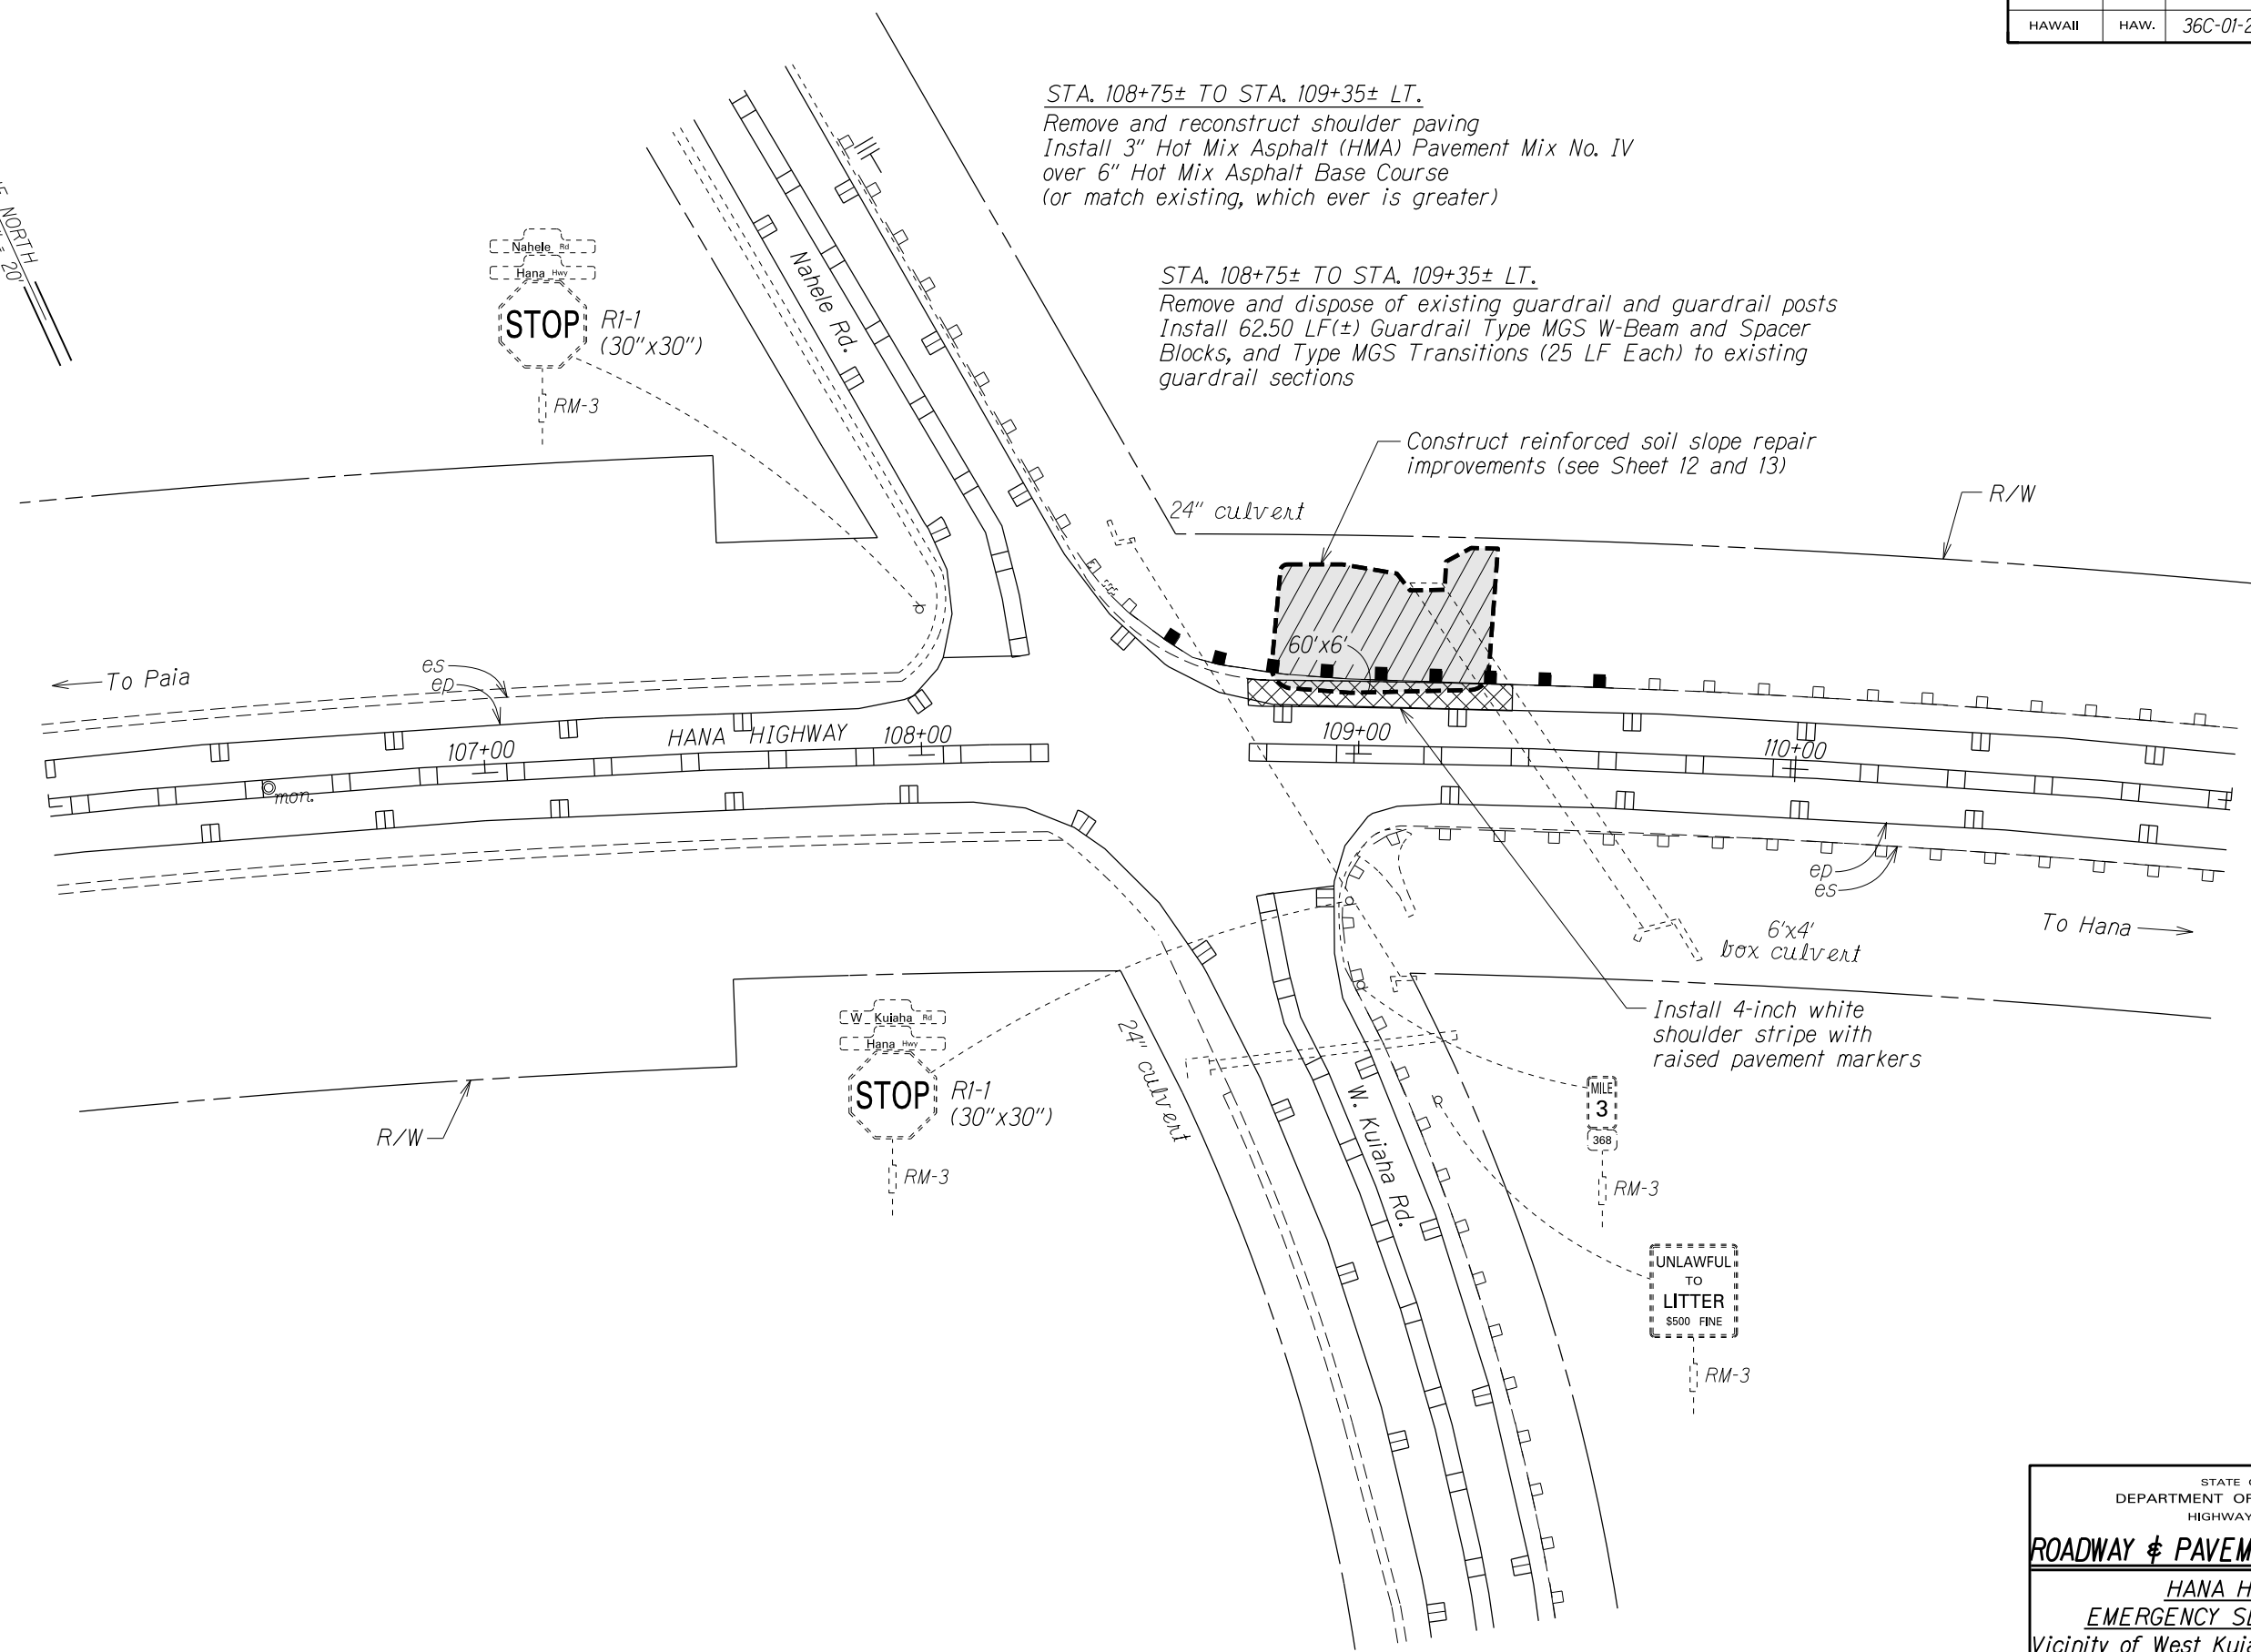

SURVEY PLOTTED BY	DATE
DRAWN BY	10/22
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
No.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ROADWAY & PAVEMENT MARKING PLAN

HANA HIGHWAY
EMERGENCY SLOPE REPAIRS
Vicinity of West Kuiaha Road Intersection
Project No. 36C-01-22M

Scale: 1" = 20' Date: October, 2022

SHEET No. 1 OF 1 SHEETS