

DISABILITY PARKING PERMIT SPECIFICATIONS

1.1 Description of Work.

The work to be performed by the Contractor shall be for the furnishing and delivering of long term disability parking permits (placards) and temporary disability parking permits (placards) as specified herein.

1.2 Material Requirements.

1. Long Term Disability Placards.

The material for the long term disability placards shall be a High-Density Polyethylene, thirty-five (35) mil in thickness. No substitutions.

2. Temporary Disability Placards.

The material for the temporary disability placards shall be a High-Density Polyethylene, thirty-five (35) mil in thickness. No substitutions.

1.3 Fabrication Requirements.

1. Long Term Disability Placards.

- A. The overall dimension shall be 4" width x 9" length.
- B. The placement and size of the printed words and cut-out shall conform to attached Exhibit A. Refinement of the actual size/type of lettering/numbers and the exact placement of the words/numbers and cut-out shall be finalized by the State in consultation with the Contractor.
- C. The background color of the placards shall be blue. The exact shade shall be Pantone 287 (blue). No substitutions.
- D. The text, International Symbol of Access, and decal box outlines shall be white.
- E. The placards shall be printed on the front and back as shown on attached Exhibit A.
- F. The placards cut-out hole for the rear-view mirror stem shall be designed as shown on attached Exhibit A.
- G. The placards shall be numbered sequentially beginning with P-282-700

2. Temporary Disability Placards.

- A. The word “TEMPORARY” shall be printed in the size and location as shown attached Exhibit B.
- B. The overall dimension shall be 4” width x 9” length.
- C. The placement and size of the printed words and cut-out shall conform to attached Exhibit B. Refinement of the actual size/type of lettering/numbers and the exact placement of the words/numbers and cut-out shall be finalized by the State in consultation with the Contractor.
- D. The background color of the placards shall be red. The exact shade shall be Pantone 185 (red). No substitutions.
- E. The text, International Symbol of Access, and decal box outlines shall be white.
- F. The placards shall be printed on the front and back as shown on attached Exhibit B.
- G. The placards cut-out hole for the rear-view mirror stem shall be designed as shown on attached Exhibit B.
- H. The placards shall be numbered sequentially beginning with T-184-500

1.4 Number of Units.

- 1. **Long Term Disability Placards:** 25,000
- 2. **Temporary Disability Placards:** 10,000

1.5 Warranty

1. Long Term Disability Placards.

Minimum period of durability of the long term disability placards under normal conditions of use shall be not less than five (5) years from the time of issuance to the public.

The Contactor shall also certify that all placards furnished conform to the specifications contained herein and shall replace all non-conforming items with others meeting these specifications without cost to the State.

If, after meeting these specifications, placards become deteriorated under normal conditions of use, the Contractor shall replace the placards at no cost to the State.

2. Temporary Disability Placards.

Minimum period of durability of the temporary disability placards under normal conditions of use shall be not less than five (5) years from the time of issuance to the public.

The Contactor shall also certify that all placards furnished conform to the specifications contained herein and shall replace all non-conforming items with others meeting these specifications without cost to the State.

If, after meeting these specifications, placards become deteriorated under normal conditions of use, the Contractor shall replace the placards at no cost to the State.

1.6 Packaging.

1. Long Term Disability Placards:

The long term disability placards shall be packaged in such a manner as to prevent sticking or damaging of printed surface while in transit or storage.

Each placard shall be wrapped in stacks of 100 placards and sealed in cartons not to exceed five hundred (500) placards per carton.

Each carton shall have a packing list on the outside indicating the type, amount, and sequential numbering (e.g.: P-xxx-xxx to P-xxx-xxx) of placards contained therein.

The carton dimensions shall not exceed 12" length x 9" width x 10" depth.

2. Temporary Disability Placards:

The temporary placards shall be packaged in such a manner as to prevent sticking or damaging of printed surface while in transit or storage.

Each placard shall be wrapped in stacks of 100 placards and sealed in cartons not to exceed five hundred (500) placards per carton.

Each carton shall have a packing list on the outside indicating the type, amount, and sequential numbering (e.g.: T-xxx-xxx to T-xxx-xxx) of placards contained therein.

The carton dimensions shall not exceed 12" length x 9" width x 10" depth.

1.7 Delivery.

Delivery must be completed within sixty (60) calendar days of receipt of each printing order from the Disability and Communication Access Board. Delivery shall be made to the Disability and Communication Access Board, 1010 Richards Street, Room 118, Honolulu, HI 96813.

1.8 Security Measures.

The Contractor must provide adequate security measures and supervision to protect the placards and decals while in storage from theft or loss to prevent unauthorized and illegal use of placards.

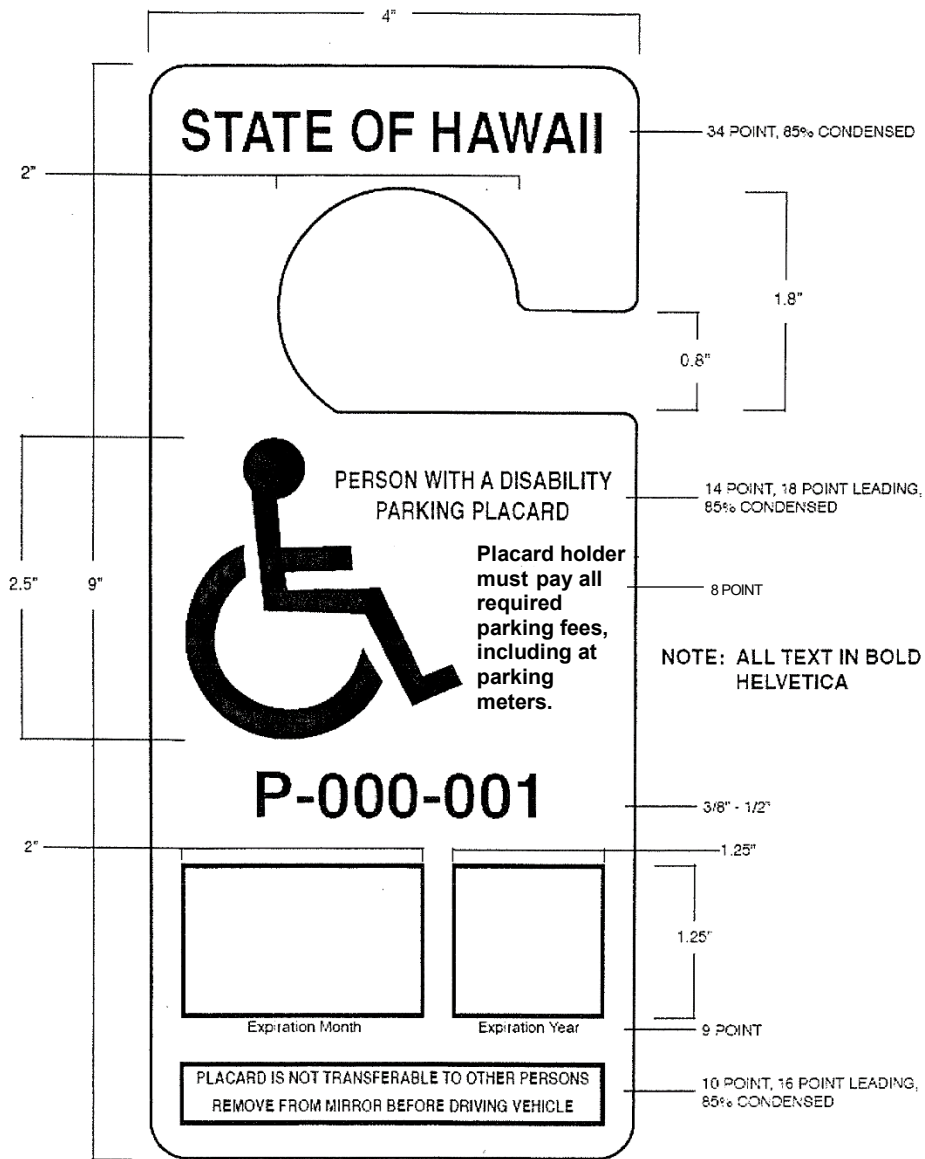


EXHIBIT A - FRONT

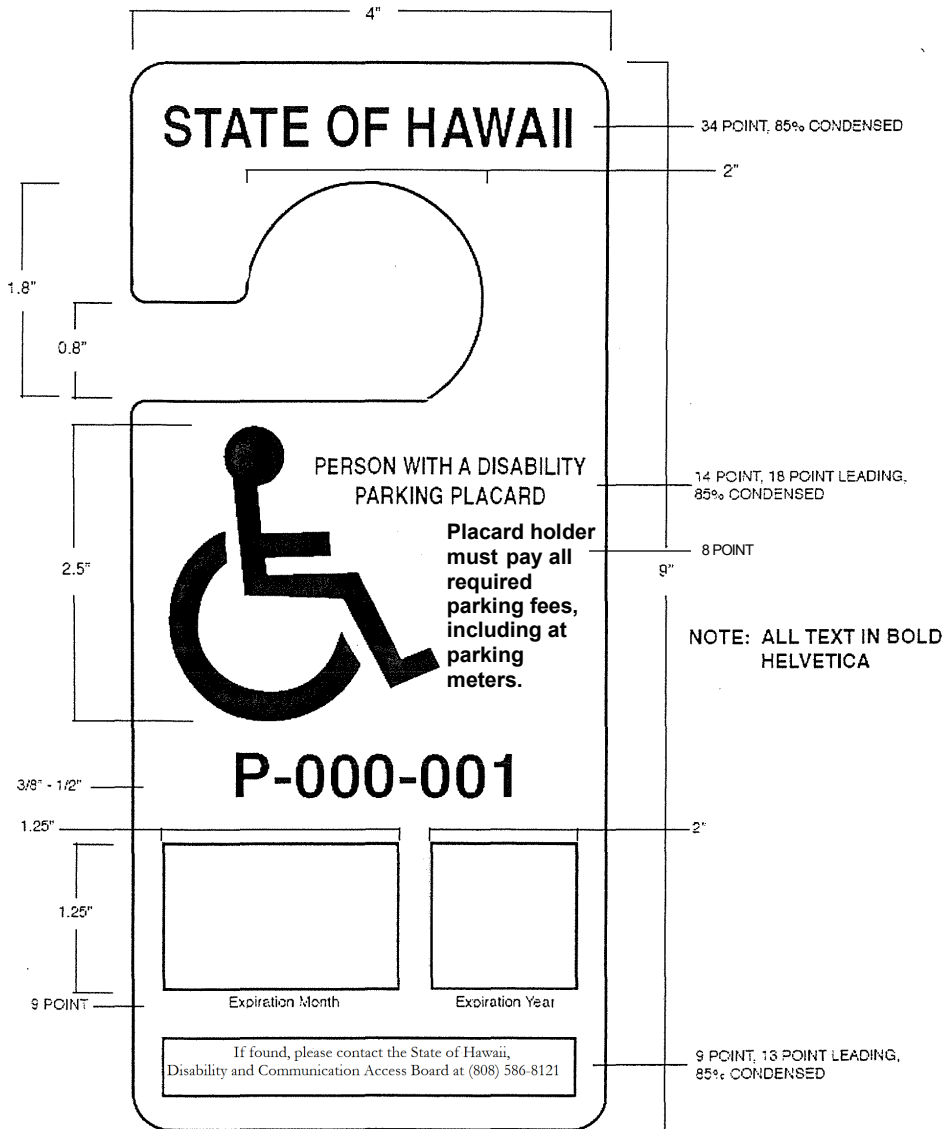


EXHIBIT A - BACK

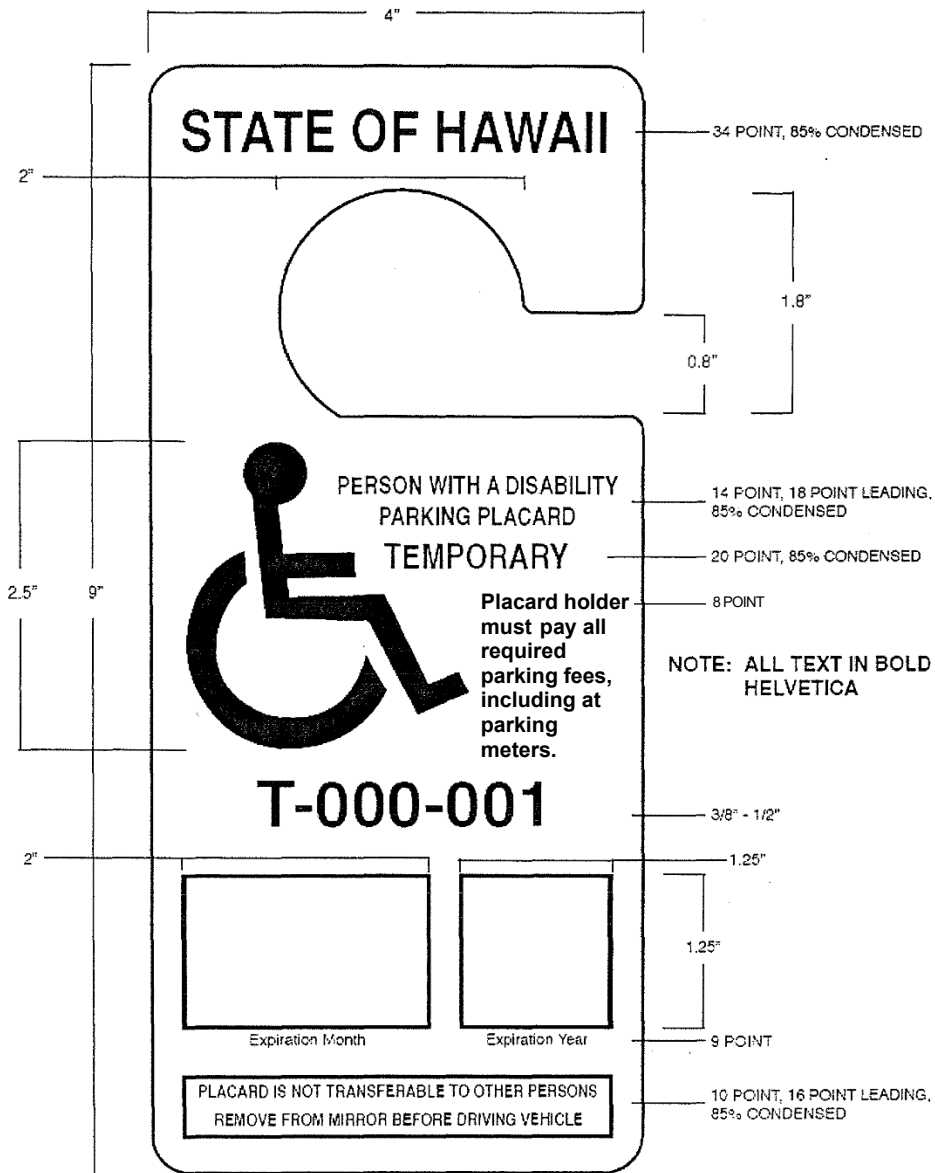


EXHIBIT B - FRONT

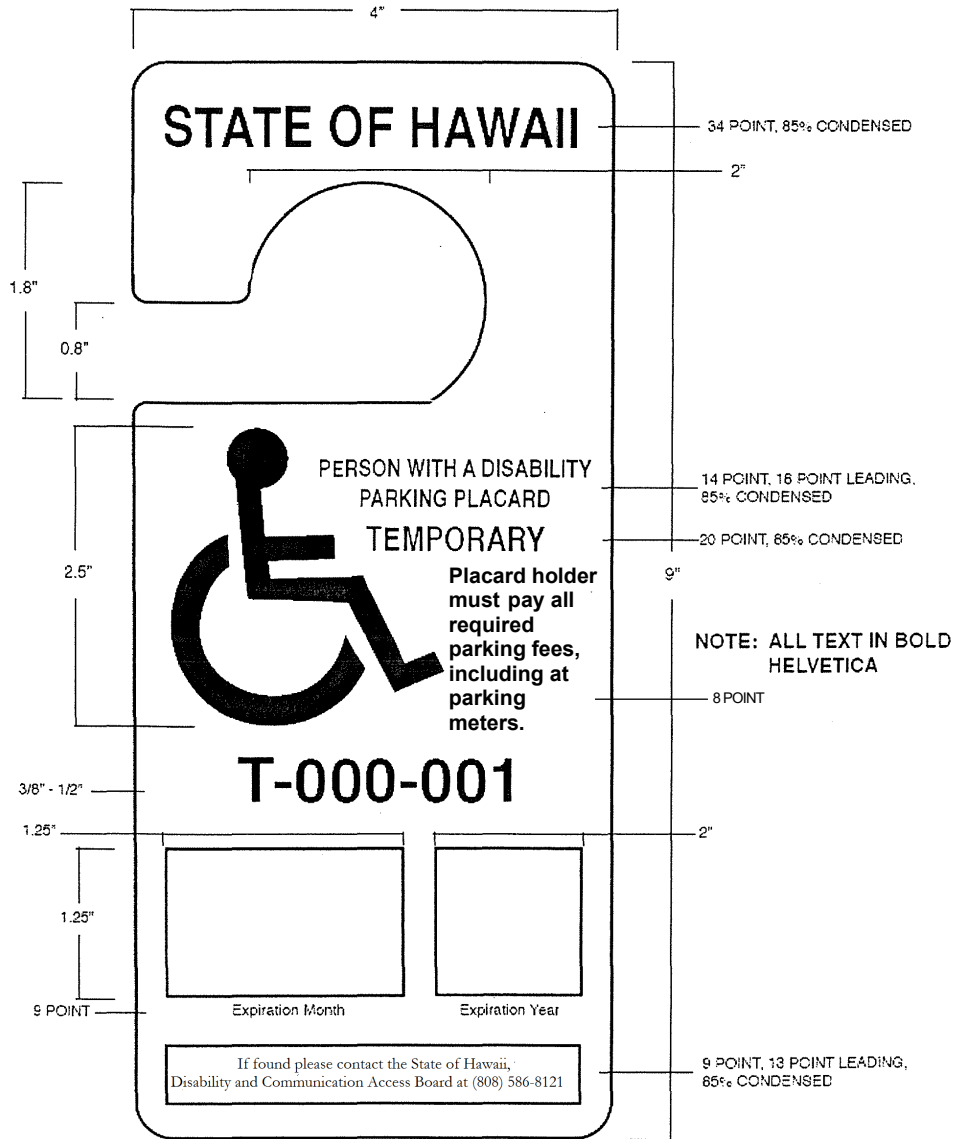


EXHIBIT B - BACK