


Drop-Deck Tilt T-16DT

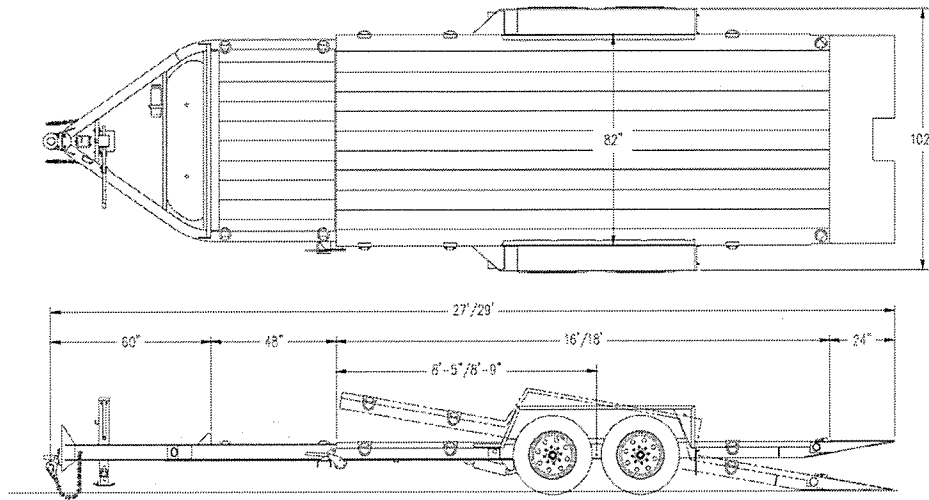

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 3" Pintle
- 7-Pole RV Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray (Lockable Lid Optional)
- 12K Bolt-On, Side-Wind, Drop-Leg Parking Jack
- Battery Break-Away Kit with Tow Charger and Test Light
- Safety Chains with Hooks

Frame/Deck

- 82" Load Width
- 19" Deck Height (Fully Loaded)
- 4' Stationary Deck
- Tilt Deck Cushion Cylinder
- Dual-Point, Single Lever Deck Lock
- 6" I-Beam Main Frame
- 3" Channel Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (6 Per Side)
- 12 Gauge One-Piece Formed Fender/Panel

Tail/Approach

- 24" Knife Edge Approach Plate (24" Length is in addition to 16' or 18' Deck Length)
- 16' Tilt Deck Load Angle 13°
- 18' Tilt Deck Load Angle 12°

Axles/Suspension

- Rubber-Ride Torsion Suspension Axles
- (2) 8,000 lb. Axles (4 Wheels)
- Tires -215/75R17.5 Load Range H, 16-Ply
- 17.5" Wheels, 8-Bolt
- Electric Brakes
- EZ Lube Hubs
- 34" Axle Spacing

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 10 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
16,000	20,840	4,840	16,000	82"	16'
16,000	20,980	4,980	16,000	82"	18'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Towmaster.com 800-462-4517