

DIVISION OF FORESTRY AND WILDLIFE

State of Hawaii  
DEPARTMENT OF LAND AND NATURAL RESOURCES  
ENGINEERING DIVISION  
Honolulu, Hawaii

---

BOARD OF LAND AND NATURAL RESOURCES

Dawn N. S. Chang  
Chairperson

CONTRACT SPECIFICATIONS AND PLANS

Job No.D00CO45C  
Kawainui Marsh Protection  
Kahanaiki Access Road Improvements  
Kailua, Oahu, Hawaii

Civil Engineer: Bowers + Kubota Consulting, Inc.  
Archaeologist: Cultural Surveys Hawaii


May 2026


State of Hawaii  
DEPARTMENT OF LAND AND NATURAL RESOURCES  
ENGINEERING DIVISION  
Honolulu, Hawaii

---

CONTRACT SPECIFICATIONS AND PLANS

Job No. D00CO45C  
Kawainui Marsh Protection;  
Kahanaiki Access Road Improvements  
Kailua, Oahu, Hawaii

Approved:   
\_\_\_\_\_  
DAVID G. SMITH  
Administrator  
Division of Forestry and Wildlife

Approved:   
\_\_\_\_\_  
DINA U. LAU, P.E.  
Acting Chief Engineer  
Engineering Division

May 2026

NOTICE TO BIDDERS .....	iii
INFORMATION AND INSTRUCTIONS TO BIDDERS .....	I-1
PROPOSAL .....	P-1
SPECIAL PROVISIONS.....	SP-1
DETAILED SPECIFICATIONS .....	S-1

PLANS (Bound Separately)

DEPARTMENT OF LAND AND NATURAL RESOURCES INTERIM GENERAL  
CONDITIONS, DATED OCTOBER 1994 (Bound Separately)

NOTICE TO BIDDERS  
(Chapter 103D, HRS)

COMPETITIVE BIDS for Job No. D00CO45C, Kawainui Marsh Protection; Kahanaiki Access Road Improvements shall be submitted to the Department of Land and Natural Resources, Engineering Division on the specified date and time through the Hawaii State e-Procurement (HIePRO). HIePRO is accessible through the State Procurement Office website at [www.spo.hawaii.gov](http://www.spo.hawaii.gov).

The Department of Land and Natural Resources Interim General Condition, dated October 1994, as amended, and the General Conditions –AG008, latest revision shall be made part of the specifications.


The project is located at Kawainui Marsh, Kailua, Oahu, Hawaii.

The work shall generally consist of construction of a paved access road to support operations and management within Kawainui Marsh, including grading, erosion and sediment control, and related site improvements.

Due to the nature of work contemplated, bidders must possess a valid State Contractor’s license, classification A.

Voluntary pre-bid meeting will be held at DOFAW Baseyard, 734 Ulukahiki Street, Kailua, Hawaii 96734, on May 19, 2026, at 10:50 am.

All interested parties are invited to State-conducted site visit on May 19, 2026 at 1:15 pm, due to site being secured access should be coordinated with DOFAW personnel. The gated project site is located approximately 600 feet from the intersection and before the entrance to LeJardin Academy on Kapa‘a Quarry Road (between Kalaniana‘ole Highway and Kapa‘a Quarry Road), Kailua, Oahu, Hawaii (see location map below).

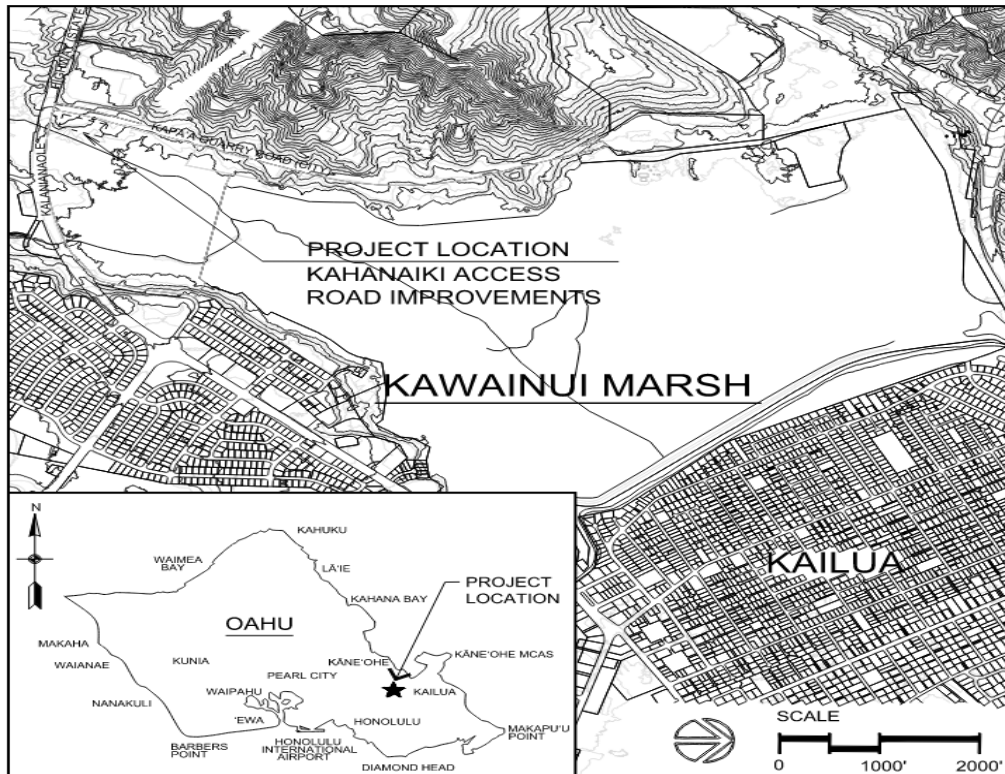

The estimated cost of construction is \$410,000.00.

The award of the contract, if it be awarded, will be subject to the availability of funds.

Since the estimated cost of construction is \$250,000 or more, the apprenticeship agreement preference pursuant to Hawaii Revised Statutes §103-55.6 (ACT 17, SLH 2009) shall apply.

Should there be any questions, please refer to the HIEPRO solicitation.

# INFORMATION AND INSTRUCTIONS TO BIDDERS

## CONTENTS

		<u>Page</u>
A	Project Location and Scope of Work.....	I-2
B	Proposals .....	I-2
C	General Conditions .....	I-2
D	Proposal Form .....	I-2
E	Omissions or Erasures .....	I-2
F	Notice of Intent to Bid and Questionnaire .....	I-2
G	Bid Security .....	I-2
H	Contractor's License Required .....	I-2
I	Irregular Bids .....	I-3
J	Withdrawal of Bids .....	I-3
K	Successful Bidder to File Performance and Payment Bonds .....	I-3
L	Number of Executed Original Counterparts of Contract Documents .....	I-3
M	Change Orders .....	I-3
N	Wages and Hours .....	I-3
O	Permits .....	I-3
P	Property Damage .....	I-4
Q	Time .....	I-4
R	Bidder's Responsibility to Provide Proper Superintendence .....	I-4
S	Liquidated Damages .....	I-4
T	Hiring of Hawaii Residents .....	I-4
U	Water and Electricity .....	I-5
V	Public Convenience and Safety .....	I-5
W	Work to be Done Without Direct Payment.....	I-5
X	As-Built Drawings .....	I-5
Y	Asbestos Containing Materials .....	I-5
Z	Worker Safety .....	I-5
AA	Toilet Facilities .....	I-6
BB	Signs .....	I-6
CC	Field Office for Department .....	I-6
DD	Quantities .....	I-6
EE	Other Health Measures .....	I-6
FF	Hawaii Business Requirement .....	I-6
GG	Compliance With §3-122-112 HAR .....	I-7

## INFORMATION AND INSTRUCTIONS TO BIDDERS

- A. PROJECT LOCATION AND SCOPE OF WORK: The project location and scope of work shall be as generally described in the Notice to Bidders.
- B. PROPOSALS: Bidders shall submit their bid, including the completed proposal form, bid bond, and any other documents required by the solicitation as part of their bid through the State of Hawaii e-Procurement System (HIePRO). See Item D, PROPOSAL FORM.
- C. GENERAL CONDITIONS: The Department of Land and Natural Resources Interim General Conditions dated October 1994, as amended, shall be made a part of these contract specifications and are referred to hereafter as the General Conditions.
- D. PROPOSAL FORM: **The Bidders shall fill out and upload the electronic copy of the proposal form to the HIePRO website when submitting the bid. Bid Proposals shall not be mailed, faxed or delivered to the State, unless requested to do so after the designated closing date. The successful Bidder shall fill out and print a hard copy of the proposal form, sign and submit the form with the contract award package.**
- E. OMISSIONS OR ERASURES: Any proposal which contains any omission or erasure or alteration not properly initialed, or conditional bid, or other irregularity may be rejected by the Board of Land and Natural Resources (Board).
- F. NOTICE OF INTENT TO BID AND QUESTIONNAIRE: A Notice of Intent to Bid is not required for this project. In compliance with HRS Section 103D-310, the lowest responsive and responsible bidder may be required to complete a questionnaire. When requested by the State, the completed questionnaire shall be submitted to the Chief Engineer for evaluation. Failure to furnish the requested information within the time allowed may be grounds for a determination of non-responsibility, in accordance with HRS Section 103D-310 and HAR Section 3-122-108.
- G. BID SECURITY: A bid security will be furnished by each bidder as provided in sub-section 2.7 of the General Conditions. The successful bidder's bid security will be retained until Contract execution and furnished a performance and payment bond in an amount equal to one hundred percent (100%) of the total Contract price, including an amount estimated to be required for extra work, is furnished.
- The Board reserves the right to hold the bid securities of the four lowest bidders until the successful bidder has entered into a contract and has furnished the required performance bond. All bid securities will be returned in accordance with sub-section 3.5 of the General Conditions.
- Should the successful bidder fail to enter into a contract and furnish a satisfactory performance bond within the time stated in the proposal, the bid security shall be forfeited as required by law.
- H. CONTRACTOR'S LICENSE REQUIRED: The Board will reject all bids received from contractors who have not been licensed by the State Contractors License Board in accordance

with Chapter 444, HRS; Title 16, Chapter 77, Hawaii Administrative Rules; and statutes amendatory thereto.

- I. IRREGULAR BIDS: No irregular bids or propositions for doing the work will be considered by the Board.
- J. WITHDRAWAL OF BIDS: No bidder may withdraw his bid between the time of the opening thereof and the award of contract.
- K. SUCCESSFUL BIDDER TO FILE PERFORMANCE AND PAYMENT BONDS: The successful bidder will be required to file performance and payment bonds each; in the amount equal to the total contract price, including amounts estimated to be required for extra work, as provided in sub-section 3.6 of the General Conditions.
- L. NUMBER OF EXECUTED ORIGINAL COUNTERPARTS OF CONTRACT DOCUMENTS: If requested by the Board, six copies of the Contract, performance and payment bonds shall be executed.
- M. CHANGE ORDERS: No work of any kind in connection with the work covered by the plans and specifications shall be considered as change order work, or entitle the Contractor to extra compensation, except when the work has been ordered in writing by the Chief Engineer (Engineer) and in accordance with sub-section 4.2 of the General Conditions.

The Contractor shall clearly identify and inform the Engineer in writing of any deviations from the contract documents at the time of submission and shall obtain the Engineer's written approval to the specified deviation prior to proceeding with any work.

- N. WAGES AND HOURS: In accordance with sub-sections 7.3 to 7.9 of the General Conditions relative to hours of labor, minimum wages and overtime pay, the current minimum wage rates promulgated by the Department of Labor and Industrial Relations (DLIR) shall be paid to the various classes of laborers and mechanics engaged in the performance of this contract on the job site. The minimum wages shall be increased during the performance of the contract in an amount equal to the increase in the prevailing wages for those kinds of work as periodically determined by the DLIR.

The Department of Land and Natural Resources will not recognize any claim for additional compensation because of the payment by the Contractor of any wage rate in excess of the said minimum wage rates. The possibility of wage increase is one of the elements to be considered by the Contractor in determining his bid, and will not, under any circumstances, be considered as the basis of a claim against the Department under this Contract.

No work shall be done on Saturdays, Sundays, legal State holidays, and/or in excess of eight (8) hours each day without the written consent of the Engineer. Should permission be granted to work at such times, the Contractor shall pay for all inspection administrative costs thereof. No work shall be done at night unless authorized by the Engineer.

- O. PERMITS: The State will process permit applications whenever possible, and the Contractor shall procure the pre-processed permits and pay the required fees. If permit applications are not processed by the State, the Contractor shall process the permit applications, permits and

licenses, and pay all charges and fees. In all cases, the Contractor shall give all notices necessary and incident to the due and lawful prosecution of the work.

- P. PROPERTY DAMAGE: It shall be the responsibility of the contractor to respect State property and to prevent damage to existing improvements. The Contractor will be responsible for damages resulting from construction operations. Immediately upon discovery, the Contractor shall repair such damage to the satisfaction of the Engineer.

All trees and shrubbery outside the excavation, embankment or construction limits shall be fully protected from injury.

- Q. TIME: The time of completion is specified in the Proposal. It is the Board's intention to insist the Contractor diligently prosecute the work to completion within the specified time.

Prospective bidders are reminded that the State has the option to proceed with or abandon a project depending on whether the project can be completed for occupancy in the specified time.

It is the bidder's responsibility to check the availability of all materials before bidding. The bidder shall select sub-contractors and suppliers who can warrant availability and delivery of all specified or qualified materials to assure project completion within the specified time.

The successful bidder must assume all risks for completing the project by the specified date. There shall be no extension of time for any reason except for delays caused by acts of God, labor disputes involving unions, or actions of the State. If for any reason the project falls behind schedule, the Contractor shall at its own cost, take necessary remedial measures to get the project back on schedule, i.e., working overtime, air freighting all materials, etc. In addition, if the Contractor fails to fully complete the project by the completion date, Contractor will be required to make the facility usable at its own cost.

- R. BIDDER'S RESPONSIBILITY TO PROVIDE PROPER SUPERINTENDENCE: The successful low bidder shall designate in writing to the Engineer the name of its authorized superintendent (Superintendent), who will be present at the job site whenever any work is in progress. The Superintendent shall be responsible for all work, receiving and implementing instructions from the Engineer in a timely manner. The cost for superintendence shall be considered incidental to the project.

If the Superintendent is not present at the site of work, the Engineer shall have the right to suspend the work as described under sub-section 5.5 c. and 7.20 - Suspension of Work of the General Conditions.

- S. LIQUIDATED DAMAGES: Liquidated damages in the amount specified in the Proposal will be assessed for each and every calendar day from and after the expiration of the time period stated in the Contract for the completion of the project.

- T. HIRING OF HAWAII RESIDENTS: The Contractor shall comply with Act 68, SLH 2010, in the performance and for the duration of this contract. The Contractor shall ensure that Hawaii residents compose not less than eighty percent of the workforce employed to perform the contract work on the project. The eighty percent requirement shall be determined by

dividing the total number of hours worked on the contract by Hawaii residents, by the total number of hours worked on the contract by all employees of the Contractor in the performance of the contract. The hours worked by any Subcontractor of the Contractor shall count towards the calculation for this section. The hours worked by employees with shortage trades, as determined by the Department of Labor and Industrial Relations (DLIR), shall not be included in the calculation for this section.

The requirements shall apply to any subcontract of \$50,000 or more in connection with the Contractor, that is, such Subcontractors must also ensure that Hawaii residents compose not less than eighty percent of the Subcontractor's workforce used to perform the subcontract.

- U. WATER AND ELECTRICITY: The Contractor shall make all necessary arrangements and pay all expenses for water and electricity used in the construction of this project.
- V. PUBLIC CONVENIENCE AND SAFETY: The Contractor shall conduct construction operations with due regard to the convenience and safety of the public at all times. No materials or equipment shall be stored where it will interfere with the safe passage of public traffic. The Contractor shall provide, install, and maintain in satisfactory condition, all necessary signs, flares and other protective facilities and shall take all necessary precautions for the protection of the work and the convenience and safety of the public. The Engineer shall have the right to suspend the performance of the work in accordance with sub-section 7.20 - Suspension of Work of the General Conditions.
- W. WORK TO BE DONE WITHOUT DIRECT PAYMENT: Whenever the contract that the Contractor is to perform work or furnish materials of any kind for which no price is fixed in the contract, it shall be understood that the Contractor shall perform such work or furnish said materials without extra charge or allowance or direct payment of any sort. The cost of performing such work or furnishing said material is to be included by the Contractor in a unit price for the appropriate item unless it is expressly specified that such work or material is to be paid for as extra work.
- X. AS-BUILT DRAWINGS: As-built drawings, the intent of which is to record the actual in-place construction so that any future renovations or tie-ins can be anticipated accurately, shall be required. All authorizations given by the Engineer to deviate from the plans shall be drawn on the job site plans. All deviations from alignments, elevations and dimensions which are stipulated on the plans shall be recorded on the as-built drawings. Final as-built drawings shall be submitted to the Engineer for review and approval. After the Engineer approves the as-built drawings, the contractor shall submit an electronic copy in Adobe PDF format on CD ROM.
- Y. ASBESTOS CONTAINING MATERIALS: The use of asbestos containing materials or equipment is prohibited. The Contractor shall insure that all materials and equipment incorporated in the project are asbestos-free
- Z. WORKER SAFETY: The Contractor shall provide, install and maintain in satisfactory condition all necessary protective facilities and shall take all necessary precautions for the protection and safety of its workers in accordance with the Occupational Safety and Health Standards for the State of Hawaii. The Engineer shall have the right to suspend the performance of the work in accordance with sub-section 7.20 - Suspension of Work of the General Conditions.

- AA. TOILET FACILITIES: All toilet facilities constructed at the project site shall be in accordance with the Public Health Regulations of the State Department of Health (DOH). All necessary precautions shall be observed at the project site. The use of sanitary facilities shall be strictly enforced and workers violating these provisions shall be promptly discharged.
- BB. SIGNS: Whenever the project involves closing or obstructing any public thoroughfare, the Contractor shall provide traffic signs conforming to the applicable provisions of the current edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways", published by the Federal Highway Administration as directed by the Engineer for the purpose of diverting or warning traffic prior to the construction area. All traffic signs shall bear proper wording stating thereon the necessary information as to diverting or warning traffic.

When indicated in the Proposal, the Contractor shall provide a project sign, size 4'-0" x 7'-0" to be placed as directed by the Engineer. The sign shall be constructed in accordance with Section 01581 - Project Sign of these specifications and approved by the Engineer. All wording, type and size of lettering and color selection shall be as specified in these specifications or as approved by the Engineer.

All signs shall be kept neat and clean and properly erected at all times.

- CC. FIELD OFFICE AREA FOR DEPARTMENT: When indicated in the Proposal, the Contractor shall provide a housed working area of at least 100 square feet adjacent to the Contractor's office for the Department's use. This area will be used by the Engineer to perform tests and to store equipment. As a minimum, the field office shall include the following: standard sized office desk and chair, lighting, ventilation, window-type air conditioning rated at 5,000 BTU, door and window with locking hardware, electrical outlets, and working communications facilities (a cellular telephone is acceptable). The Department will pay for all long-distance toll charges made by the Engineer.
- DD. QUANTITIES: All bids will be compared on the basis of quantities of work to be done as shown in the Proposal; the quantities shown in the Unit Price items are estimated, being given as a basis for comparison of bids. The Board reserves the right to increase or decrease the quantities given under the items or delete items entirely as may be required during the progress of the work.
- EE. OTHER HEALTH MEASURES: Forms of work site exposure or conditions which may be detrimental to the health or welfare of workers or of the general public shall be eliminated or reduced to safe levels as required by the DOH codes, standards, and regulations. Suitable first aid kits and a person qualified to render first aid, as specified in the DOH regulations, shall be provided at all times when work is scheduled.
- FF. HAWAII BUSINESS OR COMPLIANT NON-HAWAII BUSINESS REQUIREMENT: Bidders (Contractors) shall be incorporated or organized under the laws of the State or be registered to do business in the State as a separate branch or division that is capable of fully performing under the contract, as stipulated in §3-122-112 HAR.

GG. COMPLIANCE WITH §3-122-112 HAR:

As a condition for award of the contract and as proof of compliance with the requirements of 103D-310(c) HRS, the apparent low bidder shall furnish the required documents to the Department. If the valid required certificates are not submitted on a timely basis for award of a contract, a bidder otherwise responsive and responsible may not receive the award. Bidder is responsible to apply for and submit the following documents to the Department.

- A. **TAX CLEARANCE REQUIREMENTS (HRS Chapter 237):** Bidder shall obtain a tax clearance certificate from the Hawaii State Department of Taxation (DOTAX) and the Internal Revenue Service (IRS). The certificate is valid for six months from the most recently approved stamp date on the certificate; the certificate must be valid on the date received by the Department.
- B. Department of Labor (DLIR) “**Certificate of Compliance**”. (HRS Chapter 383 - Unemployment Insurance, Chapter 386 - Workers’ Compensation, Chapter 392 - Temporary Disability Insurance, and 393 – Prepaid Health Care): Bidder shall obtain a certificate of compliance from the Hawaii State Department of Labor and Industrial relations (DLIR). The certificate is valid for six months from the date of issue; certificates must be valid on the date received by the Department.
- C. Department of Commerce and Consumer Affairs (DCCA), Business Registration Division (BREG) “**Certificate of Good Standing**”. Bidder shall obtain a certificate of good standing issued by the Department of Commerce and Consumer Affairs (DCCA), Business Registration Division (BREG). The certificate of good standing is valid for six months from the date of issue; certificates must be valid on the date received by the Department.

Alternately, instead of separately applying for these certificates at the various state agencies, bidder may choose to use the Hawaii Compliance Express (HCE), which allows businesses to register online through a simple wizard interface at <http://vendors.ehawaii.gov> to acquire a “Certificate of Vendor Compliance” indicating the bidder’s status is compliant with the requirements of §103D-310(c), HRS, and shall be accepted for contracting and final payment purposes. Bidders that elect to use the new HCE services will be required to pay an annual fee of \$12.00 to the Hawaii Information Consortium, LLC (HIC). Bidders choosing not to participate in the HCE program will be required to provide the paper certificates as instructed in the previous paragraphs.

PROPOSAL

FOR

DEPARTMENT OF LAND AND NATURAL RESOURCES  
ENGINEERING DIVISION  
State of Hawaii

KAWAINUI MARSH PROTECTION; KAHANAIKI ACCESS ROAD  
IMPROVEMENTS, KAILUA, OAHU, HAWAII

\_\_\_\_\_, 2026

Chief Engineer  
Engineering Division  
Department of Land and Natural Resources  
State of Hawaii  
Honolulu, Hawaii

Dear Sir:

The undersigned, having carefully examined the local conditions and all available records and information covering conditions which may affect the cost of the work to be performed, and having carefully examined the Plans and Specifications, and other contract documents, hereby proposes to furnish and pay for all materials, tools, equipment, labor and other incidental work necessary to grade and install porous pavement, as required or called for in this Proposal, all according to the true intent and meaning of the Notice to Bidders, Information and Instructions to Bidders, Proposal, Detailed Specifications, Interim General Conditions, Plans, and any and all addenda for:

JOB NO. D00CO45C  
KAWAINUI MARSH PROTECTION  
KAHANAIKI ACCESS ROAD IMPROVEMENTS  
Kailua, Oahu, Hawaii

on file in the office of the Engineering Division for the TOTAL BASE BID (Items 1 to 10) of:

\_\_\_\_\_ Dollars (\$\_\_\_\_\_)  
and will fully complete all work under this contract within 180 consecutive calendar days from the date of written notice to proceed, including date of said order, said total sum being itemized on the following pages.

**JOB NO. D00CO45C  
KAWAINUI MARSH PROTECTION  
KAHANAIKI ACCESS ROAD IMPROVEMENTS**

**PROPOSAL**

<b>Item No.</b>	<b>Quantity</b>	<b>Unit</b>	<b>Description</b>	<b>Unit Price</b>	<b>Total</b>
1.	1	LS	Erosion and Sediment Control, including best management practices, stabilization, irrigation of grassing, construction ingress and egress, perimeter control, filter socks, and silt fences, in place complete.	LS	\$ _____
2.	1	LS	Earthwork, inclusive of clearing, grubbing, excavation and embankment, in place complete.	LS	\$ _____
3.	1	LS	Access road inclusive of granular subbase, geotextile, crushed stone, geoweb geocells, in place complete.	LS	\$ _____
4.	1	LS	Traffic Control, in place complete.	LS	\$ _____
5.	1	LS	Demolition Work, including demolition, hauling, and disposal as required to construct new improvements	LS	\$ _____
6.	1	LS	Tree Demolition, including Chipping, Stockpiling Mulch; Tree Pruning	LS	\$ _____
7.	1	LS	Tree Root Pruning within trail alignment, staging areas	LS	\$ _____
8.	1	LS	Project Sign, in Place Complete	LS	\$ _____
9.	Allowance		Field Office		\$ 5,000 _____
<b>Subtotal Base Bid (Items 1-9)</b>					\$ _____
10.		LS	Mobilization and Demobilization (not to exceed 10% of the Subtotal Base Bid)		\$ _____
<b>Total Base Bid (Items 1-10)</b>					\$ _____

RECYCLED PRODUCTS PREFERENCE

This project allows a 10% price preference for recycled products in accordance with HRS 103D-1005. Please indicate your selection of recycled or non-recycled product by indicating its cost FOB jobsite unloaded in the schedule below, including applicable General Excise & Use Taxes.

<u>DESCRIPTION</u>	<u>RECYCLED PRODUCT COST</u>	<u>NONRECYCLED PRODUCT COST</u>
_____	\$ _____	\$ _____
_____	\$ _____	\$ _____
_____	\$ _____	\$ _____
_____	\$ _____	\$ _____

The bidder requesting a recycled product preference shall also complete and submit the form “CERTIFICATION OF RECYCLED CONTENT” as shown in the Interim General Conditions and provide all supporting information with this proposal. Additional information may be requested to qualify a product.

The following definitions are applicable to the CERTIFICATION OF RECYCLED CONTENT form:

"Post-consumer recovered material" means any product used by a consumer, including a business that purchases the material, that has served its intended end use, and that has been separated or diverted from the solid waste stream for the purpose of use, reuse, or recycling.

"Product" includes materials, manufactures, supplies, merchandise, goods, wares, and foodstuffs.

"Recovered material" means waste material and by-products that have been separated, diverted, or removed from the solid waste stream after a manufacturing process for the purpose of use, reuse, or recycling. Recovered material does not include those materials and by-products that are generated and normally reused on-site or within original manufacturing processes (such as mill broke, in the case of paper products).

"Recycled content" means the percentage of a product composed of recovered material, or post-consumer recovered material, or both.

"Recycled product" means a product containing recovered material, or post-consumer recovered material, or both.

The bidder agrees that preference for recycled products shall be taken into consideration to determine the low bidder in accordance with said Section and the rules promulgated, however, the award of contract will be in the amount of the bid offered exclusive any preference.

## APPRENTICESHIP AGREEMENT PREFERENCE

1. If applicable to this project, any bidder seeking the preference must be a party to an apprenticeship agreement registered with the State Department of Labor and Industrial Relations (DLIR) at the time the bid is submitted for each apprenticeable trade the bidder will employ to construct the project. “Employ” means the employment of a person in an employer-employee relationship.
  - a. The apprenticeship agreement shall be registered with the DLIR and conform to the requirements of Hawaii Revised Statutes Chapter 372.
  - b. Subcontractors do not have to be a party to an apprenticeship agreement for the bidder to obtain preference.
  - c. The bidder is not required to have apprentices in its employ at the time the bid is submitted to qualify for the preference.
2. A bidder seeking the preference must state the apprenticeable trade the bidder will employ for each trade to be employed to perform the work by submitting a completed signed original Certification Form 1 verifying participation in an apprenticeship program registered with DLIR. “Apprenticeable trade” shall have the same meaning as “apprenticeable occupation” pursuant to Hawaii Administrative Rules (HAR) §12-30-5.
  - a. The *Certification Form 1* shall be authorized by an apprenticeship sponsor listed on the DLIR list of registered apprenticeship programs. “Sponsor” means an operator of an apprenticeship program and in whose name the program is approved and registered with the DLIR pursuant to HAR §12-30-1.
  - b. The authorization shall be an original signature by an authorized official of the apprenticeship sponsor.
  - c. The completed signed original Certification Form 1 for each trade must be submitted with the bid. Previous certifications shall not apply.
  - d. When filling out the *Certification Form 1*, the name of Apprenticeable Trade and Apprenticeship Sponsor must be the same as recorded in the List of Construction Trades in Registered Apprenticeship Programs that is posted on the DLIR website. “Registered apprenticeship program” means a construction trade program approved by the DLIR pursuant to HAR §12-301 and §12-30-4.
  - e. The *Certificate Form 1* and the List of Construction Trades in Registered Apprenticeship Programs is available on the DLIR website at: <http://hawaii.gov/labor/wdd>.
3. Upon receiving the *Certification Form 1*, the Procurement Officer will verify that the apprenticeship program is on the List of Construction Trades in Registered Apprenticeship Programs and that the form is signed by an authorized official of the Apprenticeship Program Sponsor. If the programs and signature are not confirmed by the DLIR, the bidder will not qualify for the preference.

4. If the bidder is certified to participate in an apprenticeship program for each trade which will be employed by the bidder for the project, a preference will be applied to decrease the bidder's bid amount by five percent (5%) for evaluation purposes.
5. Should the bidder qualify for other preferences (e.g. Hawaii Products), all applicable preferences shall be applied to the bid price.

CONTRIBUTIONS BY STATE AND COUNTY CONTRACTORS PROHIBITED

Contractors are hereby notified of the applicability of Section 11-355, HRS, which states that campaign contributions are prohibited from specified State or county government contractors during the term of the contract if the contractors are paid with funds appropriated by a legislative body.

## CONDITION OF AWARD

It is understood that the award of the contract will be made on the basis of the lowest responsible Total Base Bid (Items 1 to 10) selected by the Board of Land and Natural Resources. Write the total of bid items 1 to 10 on pages P-1.

It is understood and agreed that the Board of Land and Natural Resources reserves the right to reject any and/or all bids and waive any defects when, in the Board's opinion, such rejection or waiver will be for the best interest of the State of Hawaii.

In the event all bids exceed available funds certified by the appropriate fiscal officer, the head of the purchasing agency responsible for the procurement in question is authorized in situations where time or economic considerations preclude resolicitation of work of a reduced scope to negotiate an adjustment of the bid price, including changes in the bid requirements, with the low responsible and responsive bidder, in order to bring the bid within the amount of available funds. It is understood and agreed upon that the head of the purchasing agency may delete a portion or all of any item(s) in the proposal at the stated unit or lump sum price as necessary to stay within the available funding. The bidder is responsible to make an earnest effort to represent the actual cost of each item, including all materials, labor, equipment, overhead and profit in their bid proposal to preclude claims of anticipated profit or loss of profit because of an unbalanced bid proposal.

It is also understood that if a mutually agreeable cost for the reduced scope of work necessitated by a lack of available funds cannot be agreed upon between the bidder and the head of the purchasing agency within 14 calendar days after the bid opening, then the bid may be rejected in the best interest of the purchasing agency, and the head of the purchasing agency may negotiate in progressive order (lowest to highest) with the next lowest responsible and responsive bidder.

It is also understood and agreed that the award of the contract shall be conditioned upon funds being made available for this project and further upon the right of the Board of Land and Natural Resources to hold all bids received for a period of one hundred eighty (180) days from the date of the opening thereof, unless otherwise required by law, during which time no bid may be withdrawn.

It is also understood that Notice to Proceed may be delayed up to three hundred sixty-five (365) days after the bid opening date, and that no additional compensation will be provided for any claim for escalation or delay for issuance of Notice to Proceed on or before that date.

It is also understood and agreed that the quantities given herewith are approximate only and are subject to increase or decrease, and that the undersigned will perform all quantities of work as either increased or decreased, in accordance with the provisions of the Contract Specifications.

It is also understood and agreed that the estimated quantities shown for the items for which a UNIT PRICE is asked in this Proposal are only for the purpose of comparing on a uniform basis, bids offered for the work under this contract, and the undersigned agrees that he is satisfied with and will at no time, dispute said estimated quantities as a means of claims for anticipated profit or loss of profit, because of a difference between the quantities of the various classes of work done or the materials and equipment installed, and the said estimated quantities. On UNIT PRICE bids, payment will be made only for the actual number of units incorporated into the finished project at the contract UNIT PRICE.

After the HIEPRO bid due date and time, the figures will be extended and/or totaled in accordance with the bid prices of the acceptable proposals and the totals will be compared. In the comparison of bids,

words written in the proposal shall govern over figures and unit prices will govern over totals. Until the award of the contract, however, the right will be reserved to reject any and all proposals and to waive any defects or technicalities as may be deemed best for the interest of the State.

It is also understood and agreed that liquidated damages in the amount of One Hundred and No/100 Dollars (\$100.00) for each and every calendar day in excess thereof prior to completion of the contract shall be withheld from payments due to the Contractor.

It is also understood and agreed that if this bid is accepted, the successful bidder must enter into and execute a contract with the Board of Land and Natural Resources and furnish a Performance and Payment Bond, as required by law. These bonds shall conform to provisions of Section 103D-324 and 325, Hawaii Revised Statutes and any law applicable hereto.

It is also understood and agreed that the successful bidder will provide all necessary labor, materials, tools, equipment, and other incidentals necessary to do all the work and furnish all the materials specified in the contract in the manner and time herein prescribed, and according to the requirements of the Engineer as therein set forth.

It is understood that by submitting this proposal, the undersigned is declaring that his firm has not been assisted or represented on this matter by an individual who has, in a State capacity, been involved in the subject matter of this contract in the past two years.

It is understood that by submitting this proposal in accordance with HAR 3-122-192, the undersigned is declaring that the price submitted is independently arrived without collusion.

It is also understood that by submitting this proposal, a Certification for Safety and Health Programs for bids in excess of \$100,000 (in accordance with HRS 396-18), the undersigned certifies that his organization will have a written safety and health plan for this project that will be available and implemented by the Notice to Proceed date of this project. Details of the requirements of this plan may be obtained from the Department of Labor and Industrial Relations, Occupational, Safety and Health Division (HIOSH).

It is further understood and agreed that the successful bidder shall comply with paragraph 3.1.a "SUBCONTRACTING" of the General Provisions which requires that the contractor shall perform with his own organization and with the assistance of workmen under his immediate superintendence, work of a value not less than twenty percent (20%) of the value of all work embraced in the Contract, except that certain contract items of work, if specifically referred to in the special provisions, will be exempted from said twenty percent requirement.

Compliance with §103-310 HRS. As a condition of award all bidders shall comply with all laws governing entities doing business in the State, including Chapter 237 HRS (general excise tax); Chapter 383 HRS (employment security – unemployment insurance); Chapter 386 HRS (workers compensation); Chapter 392 HRS (temporary disability insurance); and Chapter 393 HRS (pre-paid health care), and shall produce all documents to the State (DLNR, Engineering Division) required to demonstrate compliance with these subsections. Any bidder making a false affirmation or certification under this subsection shall be suspended and may be debarred from further offerings or awards pursuant to §103D-702 HRS.

**RECEIPT OF ADDENDA**

The bidder also acknowledges receipt of any and all addenda issued by the Engineering Division, by recording the date of receipt of the respective addenda in the space provided below:

<u>Addendum</u>	<u>Date Received</u>	<u>Addendum</u>	<u>Date Received</u>
No. 1	_____	No. 5	_____
No. 2	_____	No. 6	_____
No. 3	_____	No. 7	_____
No. 4	_____	No. 8	_____

It is understood that failure to receive any such addendum shall not relieve the Contractor from any obligation under this Proposal as submitted.

It is also understood and agreed that if this Proposal is accepted and the undersigned should fail or neglect to contract as aforesaid, the Board may determine that the bidder has abandoned the Contract, and thereupon, forfeiture of the security accompanying his proposal shall operate and the same shall become the property of the Board.

JOINT CONTRACTORS OR SUBCONTRACTORS  
TO BE ENGAGED ON THIS PROJECT

The Bidder agrees that the following is a complete listing of all joint contractors or subcontractors covered under Chapter 444, Hawaii Revised Statutes (HRS), who will be engaged by the Bidder on this project to perform the required work indicated pursuant to Section 103D-302, HRS. It is the sole responsibility of the contractor to review the requirements of this Project and determine the appropriate licenses that are required to complete the Project. The Bidder certifies that the completed listing of joint contractors or subcontractors fulfills the requirements for the project and the Bidder, together with the listed subcontractors or joint contractors have all the specialty contractor's licenses to complete the work, except as provided for in HRS §103D-302(b). Failure of the Bidder to comply with this requirement may be just cause for rejection of the bid.

“A” General Engineering Contractors and “B” General Building Contractors are reminded that due to the Hawaii Supreme Court’s January 28, 2002 decision in Okada Trucking Co., Ltd. v. Board of Water Supply, et al., 97 Haw. 450 (2002), they are prohibited from undertaking any work, solely or as part of a larger project, which would require the general contractor to act as a specialty contractor in any area in which the general contractor has no license. Although the “A” and “B” contractor may still bid on and act as the “prime” contractor on an “A” or “B” project (See, HRS §444-7 for the definitions of an “A” and “B” project.), respectively, the “A” and “B” contractor may only perform work in the areas in which they have the appropriate contractor’s license (*An “A” or “B” contractor obtains “C” specialty contractor’s licenses either on its own, or automatically under HAR § 16-77-32*). The remaining work must be performed by appropriately licensed entities.

General Engineering “A” Contractors automatically have these “C” specialty contractor’s licenses: C-3, C-9, C-10, C-17, C-24, C-31a, C-32, C-35, C-37a, C-37b, C-38, C-43, C-49, C-56, C-57a, C-57b and C-61.

General Building “B” Contractors automatically have these “C” specialty contractor’s licenses: C-5, C-6, C-10, C-12, C-24, C-25, C-31a, C-32a, C-42a and C-42b.

In completing the Joint Contractors or Subcontractors List, describe the specialty contractor’s nature and scope of work to be performed for this project and provide the complete firm name of the joint contractor or subcontractor in the respective columns. If the Bidder is a general contractor and providing the work of the required specialty contractor, fill in the Bidder’s (general contractor’s) name and nature and scope of work to be performed on this project.

List only one joint contractor or subcontractor per required specialty contractor’s classification, unless within the same specialty, the work of each joint contractor or subcontractor can be described so that there is no overlap in work descriptions.

If a contractor’s license is required by law for the performance of the work which is called for in this bid, the bidder and all subcontractors must have the required license before the submission of the bidder’s proposal in the case of a non-federal aid project, and for federal-aid projects, the bidder must have the required license prior to the award of the project and all subcontractors prior to the start of the subcontracted work.



Enclosed herewith is a:

- 1. Surety Bond (\*1) )
- 2. Legal Tender (\*2) )
- 3. Cashier's Check (\*3) )
- 4. Certificate of Deposit (\*3) ) in the
- 5. Certified Check (\*3) ) amount
- 6. Official Check (\*3) ) of
- 7. Share Certificate (\*3) )
- 8. Teller's Check (\*3) )
- 9. Treasurer's Check (\*3) )

(Cross Out Those Not Applicable)

\_\_\_\_\_ Dollars (\$ \_\_\_\_\_)

as required by law.

Exact Legal Name of Company, Joint Venture or Partnership

Company is:

Sole Proprietor  Partnership  Corporation  Joint Venture  Other \_\_\_\_\_

Contractor's License No.: \_\_\_\_\_

Federal I.D. No.: \_\_\_\_\_

Hawaii General Excise Tax License I.D. No.: \_\_\_\_\_

Payment address (other than street address below): \_\_\_\_\_

City, State, Zip Code: \_\_\_\_\_

Business Address (street address): \_\_\_\_\_

City, State, Zip Code: \_\_\_\_\_

Respectfully submitted,

By \_\_\_\_\_  
 Authorized (Original) Signature (\*4)

Title: \_\_\_\_\_

Print Name: \_\_\_\_\_

Date: \_\_\_\_\_

Telephone No.: \_\_\_\_\_

E-Mail Address: \_\_\_\_\_

NOTES:

1. Surety bond underwritten by a company licensed to issue bonds in this State;
2. Legal tender; or
3. A certificate of deposit; share certificate; or cashier's, treasurer's, teller's, or official check drawn by, or a certified check accepted by, and payable on demand to the State by a bank, a savings institution, or credit union insured by the Federal Deposit Insurance Corporation or the National Credit Union Administration.
  - A. These instruments may be utilized only to a maximum of \$100,000.
  - B. If the required security or bond amount totals over \$100,000, more than one instrument not exceeding \$100,000 each and issued by different financial institutions shall be accepted.
4. Please attach to this page evidence of the authority of this officer to submit bids on behalf of the Company and also the names and residence addresses of all officers of the Company.
5. Fill in all blank spaces with information asked for or bid may be invalidated. PROPOSAL MUST BE INTACT, MISSING PAGES MAY INVALIDATE YOUR BID.

**End of Proposal**

## **SPECIAL PROVISIONS**

Amend INTERIM GENERAL CONDITIONS, dated October 1994, as follows:

### **Section 2 – Proposal Requirements and Conditions**

1. **AMEND** Section 2.1 Qualification of Bidder with the following:

Written Notice of Intent to Bid or Offer: A written Notice of Intent to Bid is not required for the Solicitation.

Standard Qualification Questionnaire: Bidders may be required to complete a standard qualifications questionnaire. When requested, the information shall be furnished within two working days or longer at the discretion of the Engineer. Failure to furnish the requested information within the time allowed may be grounds for a determination of non-responsibility, in accordance with HRS Section 103D-310 and HAR Section 3-122-108.

Hawaii Business or Compliant Non-Hawaii Business Requirement: Bidders shall be incorporated or organized under the laws of the State or be registered to do business in the State as a separate branch or division that is capable of fully performing under the contract, as stipulated in §3-122-112 HAR. A certified letter is not required prior to bid opening.

Compliance with §3-122-112 HAR: As a condition for award of the contract and as proof of compliance with the requirements of 103D-310(c) HRS, the apparent low bidder shall furnish the required documents to the Department. If the valid required certificates are not submitted on a timely basis for award of a contract, a bidder otherwise responsive and responsible may not receive the award. Bidder is responsible to apply for and submit the following documents to the Department.

- A. Tax Clearance (HRS Chapter 237): Bidder shall obtain a tax clearance certificate from the Hawaii State Department of Taxation (DOTAX) and the Internal Revenue Service (IRS). The certificate is valid for six months from the most recently approved stamp date on the certificate; the certificate must be valid on the date received by the Department.
- B. Department of Labor (DLIR) “Certificate of Compliance”. (HRS Chapter 383 - Unemployment Insurance, Chapter 386 - Workers’ Compensation, Chapter 392 - Temporary Disability Insurance, and 393 – Prepaid Health Care): Bidder shall obtain a certificate of compliance from the Hawaii State Department of Labor and Industrial relations (DLIR). The certificate is valid for six months from the date of issue; certificates must be valid on the date received by the Department.
- C. Department of Commerce and Consumer Affairs (DCCA), Business Registration Division (BREG) “Certificate of Good Standing”. Bidder shall obtain a certificate of good standing issued by the Department of Commerce and Consumer Affairs (DCCA), Business Registration Division (BREG). The certificate of good standing is valid for six months from the date of issue; certificates must be valid on the date received by the Department.

**Hawaii Compliance Express.** Alternately, instead of separately applying for these certificates at the various state agencies, bidder may choose to use the Hawaii Compliance Express (HCE), which allows businesses to register online through a simple wizard interface at <http://vendors.hawaii.gov> to acquire a “Certificate of Vendor compliance” indicating that bidder’s status is compliant with requirements of §103D-310(c), HRS, shall be accepted for contracting and final payment purposes.

Bidders that elect to use the new HCE services will be required to pay an annual fee of \$15.00 to the Hawaii Information Consortium, LLC (HIC). Bidders choosing not to participate in the HCE program will be

required to provide the paper certificates as instructed in the previous paragraphs.

2. **ADD** Section 2.4a, Pre-Bid Conferences

Required Pre-bid Conferences: For construction and design-build projects with an estimated value of \$500,000 or more and solicited under the competitive sealed bid method (103D-302 HRS); and for construction and design-build projects with an estimated value of \$100,000 or more and solicited under the competitive sealed proposal method (103D-303 HRS); a pre-bid conference is required.

Other Pre-Bid Conferences: The Department may require a pre-bid conference for construction or design-build projects that are below the dollar threshold listed in above or when projects have special or unusual requirements.

Other Conditions: The Department may require the prospective Bidders to make a physical inspection of the project site and make attendance at the pre-bid conference a condition for submitting an offer.

Nothing stated at the pre-bid conference shall change the solicitation unless a change is made by written addendum.

3. **DELETE** Section 2.5, Addenda and Interpretations, in its entirety and replace with the following:

“Discrepancies, omissions, or doubts as to the meaning of drawings and specifications should be communicated using the question-and-answer section on the HIEPRO solicitation for interpretation and must be received in the time frame set in the HIEPRO solicitation. Any interpretation, if made and any supplemental instructions will be in the form of written addenda to the plans and specifications and made available prior to the offer due date. It shall be the prospective bidder’s sole responsibility to verify and obtain any said addenda. Failure of any bidder to receive any such addendum or interpretation shall not relieve such bidder from any obligation under his bid as submitted. All addenda so issued shall become part of the contract documents.”

**Section 3 – Award and Execution of Contract**

1. **AMEND** Section 3.3, Award of Contract, by deleting “sixty (60)” and replacing with “one hundred eighty (180) days” in the first paragraph.

2. **AMEND** Section 3.3, Award of Contract, by adding the following after the first paragraph:

“If the contract is not awarded within the one hundred eighty (180) days, the Department may request the successful Bidder to extend the time for the acceptance of its bid. The Bidder may reject such a request without penalty; and in such case, the Department may at its sole discretion make a similar offer to the next lowest responsive and responsible bidder and so on until a bid is duly accepted or until the Department elects to stop making such requests.”

3. **AMEND** Section 3.9, Notice to Proceed, by deleting “180 days” and replacing with “three hundred sixty-five (365) days” in the last paragraph.

4. **ADD** Section 3.10, Protests:

**“3.10 PROTESTS**—Pursuant to Section 103D-701, Hawaii Revised Statutes, an actual or prospective offeror who is aggrieved in connection with the solicitation or award may submit a protest. Any protest shall be submitting in writing to the Chairperson, Department of Land and Natural Resources, 1151

Punchbowl Street, Honolulu, Hawaii 96813, or designee as specified in the solicitation.

A protest shall be submitted in writing within five (5) working days after the aggrieved person knows or should have known the facts giving rise thereto; provided that a protest based upon the content of the solicitation shall be submitted in writing prior to the date set for receipt of offers. Further provided that a protest of an award or proposed award shall be submitted within five (5) working days after the posting of the award of the contract.

The notice of award, if any, resulting from this solicitation shall be posted on the HIePRO website: [HTTP://www.hawaii.gov/spo2/](http://www.hawaii.gov/spo2/).

### **Section 5 – Control of Work**

**AMEND** Section 5.8 Value Engineering Incentive by deleting “\$100,000” and replacing with “\$250,000” in the first paragraph.

### **Section 6 – Substitution of Materials and Equipment**

**ADD** the following to Section 6.3 Sub-paragraph b:

4. If the substitution meets all the requirements of the specifications and plans.

### **Section 7 – Prosecution and Progress**

1. **DELETE** Section 7.2d in its entirety and replace with the following:

“d. Insurance Requirements

1. Obligation of Contractor

The Contractor shall not commence any work until it obtains, at its own expense, all required insurance. Such insurance must have the approval of the Department as to limit, form and amount and must be maintained with a company authorized by law to issue such insurance in the State of Hawaii.

All insurance described herein will be maintained by the Contractor for the full period of the contract and in no event will be terminated or otherwise allowed to lapse prior to written certification of final acceptance of the work by the Department.

Certificate(s) of Insurance acceptable to the Department shall be filed with the Engineer prior to commencement of the work. These certificates shall contain a provision that coverages afforded under the policies will not be canceled or changed until at least thirty days written notice has been given to the Engineer by registered mail. The insurance policies shall name the State of Hawaii, its officers and employees as an additional insured and such coverage shall be noted on the Certificate. Should any policy be canceled before final acceptance of the work by the Department, and the Contractor fails to immediately procure replacement insurance as specified, the Department, in addition to all other remedies it may have for such breach, reserves the right to procure such insurance and deduct the cost thereof from any money due to the Contractor.

Nothing contained in these insurance requirements is to be construed as limiting the extent of Contractor’s responsibility for payment of damages resulting from its operations under this

contract, including the Contractor's obligation to pay liquidated damages, nor shall it affect the Contractor's separate and independent duty to defend, indemnify and hold the Department harmless pursuant to other provisions of this contract. In no instance will the Department's exercise of an option to occupy and use completed portions of the work relieve the Contractor of its obligation to maintain the required insurance until the date of final acceptance of the work.

All insurance described herein shall cover the insured for all work to be performed under the contract, all work performed incidental thereto or directly or indirectly connected therewith, including traffic detour work or other work performed outside the work area, and all change order work.

The Contractor shall, from time to time, furnish the Engineer, when requested, satisfactory proof of coverage of each type of insurance required or a copy of the actual policies covering the work. Failure to comply with the Engineer's request may result in suspension of the work and shall be sufficient grounds to withhold future payments due the Contractor and to terminate the contract for Contractor's default.

## 2. Types of Insurance

The Contractor shall purchase and maintain insurance described below which shall provide coverage against claims arising out of the Contractor's operations under the contract, whether such operations be by the Contractor itself or by the subcontractor or by anyone directly or indirectly employed by any of them or by anyone for whose acts any of them may be liable.

- (a) Worker's Compensation. The Contractor and all subcontractors shall obtain full worker's compensation insurance coverage for all persons whom they employ or may employ in carrying out the work under this contract. This insurance shall be in strict conformity with the requirements of the most current and applicable State of Hawaii Worker's Compensation Insurance laws in effect on the date of the execution of this contract and as modified during the duration of the contract.
- (b) Commercial General Liability Insurance and Automobile Insurance. Contractor's commercial general liability insurance and automobile liability insurance shall both be obtained in a combined, single limit of not less than \$1,000,000 per occurrence that shall include coverage for bodily injury, sickness, disease or death of any person, arising directly or indirectly out of, or in connection with, the performance of work under this contract.

The Contractor's property damage liability insurance shall provide for a single combined limit of not less than \$1,000,000 for all damages arising out of injury to or destruction of property of others including the Department's, arising directly or indirectly out of or in connection with the performance of the work under this contract including explosion or collapse.

The Contractor shall either:

- i. Require each of its subcontractors to procure and to maintain during the life of its subcontract, subcontractors' comprehensive general liability, automobile liability and property damage liability insurance of the type and in the same amounts specified herein; or
- ii. Insure the activities of its subcontractors in its own policy.

The Contractor will be permitted, in cooperation with insurers, to maintain a self-insured retention for up to 25% of the per occurrence combined single limits of the commercial general liability and the automobile liability policies. The existence of the self-insured retention must be noted on the certificate of insurance coverage submitted to the Department or else it will be understood that the insurer is providing first dollar coverage for all claims. For all claims within the self-insured retention amount, the rights, duties and obligations between the Contractor and the Department shall be identical to that between a liability insurer and the Department, as an additional insured, as if there was no self-insured retention.

- (c) **Builder's Risk Insurance.** Unless included in the Specifications of this project, the Contractor shall not be required to provide builder's risk insurance. If required as noted in the Specifications, builder's risk insurance shall be provided during the progress of work and until final acceptance by the Department upon completion of the contract. It shall be "All Risk" (including but not limited to earthquake, windstorm and flood damage) completed value insurance coverage on all completed work and work in progress to the full replacement value thereof. Such insurance shall include the Department as additional name insured. The Contractor shall submit to the Engineer for its approval all items deemed to be uninsurable. The policy may provide for a deductible in an amount of up to 25% of the amount insured by the policy. With respect to all losses up to any deductible amount, the relationship between the Contractor and the Department shall be that of insurer and additional insured as if no deductible existed".

2. **DELETE** Section 7.16 in its entirety and replace with the following:

"RESPONSIBILITY FOR DAMAGE CLAIMS; INDEMNITY – The Contractor shall indemnify the State and the Department against all loss of or damage to the State's or the Department's existing property and facilities arising out of any act or omission committed in the performance of the work by the Contractor, any subcontractor or their employees and agents. Contractor shall defend, hold harmless and indemnify the Department and the State, their employees, officers and agents against all losses, claims, suits, liability and expense, including but not limited to attorneys' fees, arising out of injury to or death of persons (including employees of the State and the Department, the Contractor or any subcontractor) or damage to property resulting from or in connection with performance of the work and not caused solely by the negligence of the State or the Department, their agents, officers and employees. The State or the Department may participate in the defense of any claim or suit without relieving the Contractor of any obligation hereunder. The purchase of liability insurance shall not relieve the Contractor of the obligations described herein.

The Contractor agrees that it will not attempt to hold the State and its Departments and Agencies and their officers, representatives, employees or agents, liable or responsible for any losses or damages to third parties from the action of the elements, the nature of the work to be done under these specifications or from any unforeseen obstructions, acts of God, vandalism, fires or encumbrances which may be encountered in the prosecution of the work.

The Contractor shall pay all just claims for materials, supplies, tools, labor and other just claims against the Contractor or any subcontractor in connection with this contract and the surety bond will not be released by final acceptance and payment by the Department unless all such claims are paid or released. The Department may, but is not obligated to, withhold or retain as much of the monies due or to become due the Contractor under this contract considered necessary by the Engineer to cover such just claims until satisfactory proof of payment or the establishment of a payment plan is presented.

The Contractor shall defend, indemnify and hold harmless the State and its Departments and Agencies and their officers, representatives, employees or agents from all suits, actions or claims of any character brought on account of any claims or amounts arising or recovered under the Worker's Compensation Laws or any other law, by-law, ordinance, order or decree.

**Section 8 – Measurement and Payment**

1. **DELETE** Section 8.7a in its entirety and replace with the following:

- a. Tax Clearances from the State of Hawaii Department of Taxation and Internal Revenue Service, subject to section 103D-328, HRS, current within two months of issuance date indicating that all delinquent taxes levied or accrued under State Statutes against the contractor have been paid.

2. **ADD** Section 8.7d, Certificate of Compliance:

- d. A Certification from the Contractor affirming that the Contractor has, as applicable, remained in compliance with all laws as required by Section 103D-310, HRS, and Section 3-122-112, HAR. A contractor making a false affirmation shall be suspended and may be debarred pursuant to section 103D-702, HRS.
  - 1. Certification of Compliance for Final Payment, State Procurement Office Form-22. Must be Signed Original.

3. **ADD** Section 8.7e, Hawaii Compliance Express:

- e. In lieu of submitting the tax clearances from Taxation and IRS, and SPO Form -22, the Contractor may choose to use the Hawaii Compliance Express as described on page SP-1 of this Special Provisions.

# TABLE OF CONTENTS

TECHNICAL SPECIFICATIONS	SECTION NO.
<b><i>DIVISION 1 - GENERAL REQUIREMENTS</i></b>	
General Specifications	01019
Standard References	01090
Archaeological Protection	01100
Submittals	01300
Mobilization and Demobilization	01505
Barricades	01530
Pollution Control	01567
Project Sign	01581
<b><i>DIVISION 2 - SITEWORK</i></b>	
Erosion Control	02050
Site Preparation	02100
Clearing and Grubbing	02110
Earthwork	02200
Site Demolition	02220

## SECTION 01019

### GENERAL SPECIFICATIONS

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

Work shall consist of furnishing all labor, tools, materials and equipment necessary and required to construct in place complete all work as indicated on the drawings and as specified herein.

##### 1.2 GENERAL

- A. Examination of Premises: The Contractor shall contact the Engineer and obtain permission before visiting the site.
- B. All lines and grades shall be established by a licensed surveyor, or licensed Civil Engineer, registered in the State of Hawaii. The Contractor shall submit evidence of current and valid registration.
- C. Notices: The Contractor shall notify the Engineer and give at least three (3) working days' notice before starting any work.
- D. Disruption of Utility Services: All work related to the temporary disconnection of electrical system shall be pre-arranged with the Engineer so that any disruption of such services will be kept to a minimum. In the event temporary power hook-up is required, the Contractor shall provide the necessary services.
- E. Contractor's Operations
  - 1. The Contractor must employ, insofar as possible, such methods and means of carrying out the work so as not to cause any interruption or interference to the facility's operations. Where the Contractor's operations would result in interruptions which would hamper the operations of the facilities, the Contractor shall rearrange the schedule of work accordingly.
  - 2. The Contractor shall maintain safe passageway to and from the facility for the user agency personnel and the public at all times.
- F. Lead Paint
  - 1. When the project includes paint to be disturbed that was applied prior to 1980, it shall be assumed to contain lead. The Contractor shall inform its employees, subcontractors, and all other persons engaged in the project that lead containing paints are present in the existing buildings at the job site and to follow the requirements of the Department of Labor and Industrial Relations, Division of

Occupational Safety and Health, Title 12, Subtitle 8, Chapter 148, Lead Exposure in Construction, Hawaii Administrative Rules (Chapter 12-148, HAR).

G. Parking Policy for Contractor

1. The Contractor and its employees will not be allowed to park in zones assigned to facility personnel.
2. Areas to be used by the Contractor shall be as designated by the Engineer. Any lawn damaged by the Contractor shall be restored as instructed by the Engineer at no cost to the State.

H. Toilet Accommodations: The Contractor may use the existing toilet facilities if so, designated by the Engineer; however, it is the Contractor's responsibility to keep same clean and in a sanitary condition at all times.

I. Protection of Property: The Contractor shall continually maintain adequate protection of all its work from damage and shall protect all property, including but not limited to buildings, equipment, furniture, grounds, vegetation, material, utility systems located at and adjoining the job site. The Contractor shall repair, replace or pay the expense of repair of damages resulting from its operations.

J. Use of Power-Driven Equipment: The Contractor is cautioned to take all necessary safety precautions to protect the facility personnel, and the public whenever power driven equipment is used.

K. Safety: The Contractor shall carefully read and strictly comply with the requirements of the Hawaii Occupational Safety and Health Law, Chapter 396, Hawaii Revised Statutes, as amended, is applicable and made a part of the Contract.

L. Clean Up Premises: The Contractor shall clean up and remove from premises all debris accumulated from operations as necessary or as directed. See also Section 7.25 of the General Conditions.

M. Responsibility

1. The State will hold the Contractor liable for all the acts of Subcontractors and shall deal only with the prime Contractor in matters pertaining to other trades employed on the job. The Contractor shall be responsible for coordinating the work of all trades on the job.
2. Should the Contractor discover any discrepancy in the plans or specifications, the Contractor shall immediately notify the Engineer before proceeding any further with the work, otherwise, the Contractor will be held responsible for any cost involved in correction of work placed due to such discrepancy.

N. Cooperation with Other Contractors: The State reserves the right at any time to contract for

or otherwise perform other or additional work within the contract zone limits of this Contract. The Contractor of this project shall, to the extent ordered by the State, conduct its work so as not to interfere with or hinder the progress or completion of the work performed by other contractors.

O. Division of the Work: The Divisions and Sections into which these Specifications are divided shall not be considered an accurate or complete segregation of work by trades. This also applies to all work specified within each Section.

P. Drawings and Specifications

1. The Contractor shall not make alterations in the drawings and specifications. In the event the contractor discovers any errors or discrepancies, the Contractor shall immediately notify the Engineer in accordance with the General Conditions.
2. Where devices, or items, or parts thereof are referred to in the singular, it is intended that such reference shall apply to as many such devices, items or parts as are required to properly complete the work.
3. Specifications and drawings are prepared in abbreviated form and include incomplete sentences. Omission of words or phrases such as "the Contractor shall", "as shown on the drawings", "a", "an", and "the" are intentional. Omitted words and phrases shall be provided by inference to form complete sentences.

Q. Required Submittals

1. Required submittals as specified in the Technical Sections of these specifications include one or more of the following: Shop drawings; color samples; material samples; technical data; schedules of materials; schedules of operations; guarantees; operating and maintenance manuals; and as-built drawings.
2. The Contractor shall make a comprehensive list of the required submittals, by Specification Section, and submit this list to the Engineer within 15 days after notice to proceed.
3. As-Built Drawings: When as-built drawings are required for submittal, the following shall apply:
  - a. As-built drawings, the intent of which is to record the actual in-place construction so that any future renovations or tie-ins can be anticipated accurately, shall be required.
  - b. All deviations from alignments, elevations and dimensions which are stipulated on the plans shall be recorded in red on the as-built drawings.
  - c. The following procedure shall be followed:

- 1) Immediately after these changes are constructed in place, the Contractor shall record them on the field office plans.
- 2) Within two weeks after final inspection of the project, the Contractor shall transfer the changes marked on the field office plans onto a clean copy of plans using a red pencil. Any deletions shall be so noted and redrawn as necessary. The Contractor shall stamp or mark the tracings "AS-BUILT", and also sign and date each drawing so marked.
- 3) The Contractor shall submit the as-built drawings to the Engineer for review and approval. After the Engineer approves the as-built drawings, the Contractor shall submit an electronic copy in Adobe PDF format on CD ROM.
- 4) Any as-built drawing which the Engineer determines does not accurately record the deviation shall be corrected by the State, and the Contractor shall be charged for the services.

END OF SECTION

SECTION 01090

STANDARD REFERENCES

PART 1 - GENERAL

Wherever used in the project, the following abbreviations will have the meanings listed:

<u>Abbreviation</u>	<u>Company</u>
AA	Aluminum Association Incorporated 818 Connecticut Avenue, N.W. Washington, D.C. 20006
AASHTO	American Association of State Highway and Transportation Officials 444 North Capitol Street, N.W., Suite 225 Washington, D.C. 20001
ACI	American Concrete Institute P.O. Box 19150 Detroit, MI
AEIC	Association of Edison Illuminating Companies 51 East 42nd Street New York, NY 10017
AFBMA	Anti-Friction Bearing Manufacturer's Association 60 East 42nd Street New York, NY 10017
AGA	American Gas Association 8501 East Pleasant Valley Road Cleveland, OH 44131
AGMA	American Gear Manufacturer's Association 1330 Massachusetts Avenue, N.W. Washington, D.C.
AISC	American Institute of Steel Construction 101 Park Avenue New York, NY 10017
AISI	American Iron and Steel Institute 1000 16th Street, N.W. Washington, D.C. 20036
AITC	American Institute of Timber Construction

<u>Abbreviation</u>	<u>Company</u>
	333 West Hampden Avenue Englewood, CO 80110
AMCA	Air Moving and Conditioning Association, Inc. 30 West University Drive Arlington Heights, IL 60004
ANSI	American National Standards Institute, Inc. 1430 Broadway New York, NY 10018
APA	American Plywood Association 1119 A Street Tacoma, WA 98401
API	American Petroleum Institute 1801 K Street N.W. Washington, DC 20006
ARI	Air-Conditioning and Refrigeration Institute 1814 North Fort Myer Drive Arlington, VA 22209
ASCE	American Society of Civil Engineers 345 East 47th Street New York, NY 10017
ASCII	American Standard Code for Information Interchange United States of America Standards Institute 1430 Broadway New York, NY 10018
ASE Code	American Standard Safety Code for Elevators, Dumbwaiter and Escalators American National Standards Institute 1430 Broadway New York, NY 10018
ASHRAE	American Society of Heating, Refrigeration and Air Conditioning Engineers United Engineering Center 345 East 47th Street New York, NY 10017

<u>Abbreviation</u>	<u>Company</u>
ASME	American Society of Mechanical Engineers 345 East 47th Street New York, NY 10017
ASTM	American Society for Testing and Materials 1916 Race Street Philadelphia, PA 19103
AWPA	American Wood Preservers Association 1625 Eye Street Washington, DC 20006
AWS	American Welding Society 2501 N.W. 7th Street Miami, FL 33125
AWWA	American Water Works Association 6666 West Quincy Avenue Denver, CO 80235
CBM	Certified Ballast Manufacturers 2120 Keith Building Cleveland, OH 44115
CMAA	Crane Manufacturers Association of America, Inc. (Formerly called: Overhead Electrical Crane Institute - OECI) 1326 Freeport Road Pittsburgh, PA 15238
CRSI	Concrete Reinforcing Steel Institute 180 North La Salle Street Chicago, IL 60601
CSA	Canadian Standards Association 178 Rexdale Boulevard Rexdale, Ontario, M9W 1R3, Canada
DEMA	Diesel Engine Manufacturer's Association 122 East 42nd Street New York, NY 10017

<u>Abbreviation</u>	<u>Company</u>
DIS	Division of Industrial Safety California Department of Industrial Relations 2422 Arden Way Sacramento, CA 95825
EI	Edison Electric Institute 90 Park Avenue New York, NY 10016
EIA	Electronic Industries Association 2001 Eye Street N.W. Washington, DC 20006
EJMA	Expansion Joint Manufacturer's Association 331 Madison Avenue New York, NY 10017
ESO	Electrical Safety Orders, California Administrative Code, Title 8, Chap. 4, Subarticle 5 Office of Procurement, Publications Section P.O. Box 20191 8141 Elder Creek Road Sacramento, CA 95820
FEDSPEC	Federal Specifications General Services Administration Specification and Consumer Information Distribution Branch Washington Navy Yard, Bldg. 197 Washington, DC 20407
FEDSTDS	Federal Standards (see FEDSPECS)
FM	Factory Mutual Research 1151 Boston-Providence Turnpike Norwood, MA 02062
HEI	Heat Exchange Institute 122 East 42nd Street New York, NY 10017
HI	Hydraulic Institute 1230 Keith Building Cleveland, OH 44115

Job No. D00CO45C  
Kawainui Marsh Protection  
Kahanaiki Access Road Improvements

Standard References  
01090-4

<u>Abbreviation</u>	<u>Company</u>
IAPMO	International Association of Plumbing and Mechanical Officials 5032 Alhambra Avenue Los Angeles, CA 90032
ICBO	International Conference of Building Officials 5360 South Workman Mill Road Whittier, CA 90601
ICEA	Insulated Cable Engineers Association P.O. Box P South Yarmouth, MA 02664
IEEE	Institute of Electrical and Electronics Engineers, Inc. 345 East 47th Street New York, NY 10017
IES	Illuminating Engineering Society C/O United Engineering Center 345 East 47th Street New York, NY 10017
ISA	Instrument Society of America 400 Stanwix Street Pittsburgh, PA 15222
JIC	Joint Industrial Council 7901 Westpark Drive McLean, VA 22101
MILSPEC	Military Specifications Naval Publications and Forms Center 5801 Tabor Avenue Philadelphia, PA 19120
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. 127 Park Street, N.E. Vienna, VA 22180

<u>Abbreviation</u>	<u>Company</u>
NAAMM	National Association of Architectural Metal Manufacturers 100 South Marion Street Oak Park, IL 60302
NACE	National Association of Corrosion Engineers P.O. Box 986 Katy, TX 77450
NEC	National Electric Code National Fire Protection Association 470 Atlantic Avenue Boston, MA 02210
NEMA	National Electrical Manufacturer's Association 155 East 44th Street New York, NY 10017
NESC	National Electric Safety Code American National Standards Institute 1430 Broadway New York, NY 10018
NFPA	National Forest Products Association (Formerly called: National Lumber Manufacturer's Association) 1619 Massachusetts Avenue, N.W. Washington, DC 20036
OSHA	Occupational Safety and Health Act U.S. Department of Labor San Francisco Regional Office 450 Golden Gate Avenue, Box 36017 San Francisco, CA 94102
PPIC	The Plumbing & Piping Industry Council, Inc. Suite 402 510 Shatto Place Los Angeles, CA 90020
SAE	Society of Automotive Engineers 2 Pennsylvania Street New York, NY 10001

<u>Abbreviation</u>	<u>Company</u>
SAMA	Scientific Apparatus Makers Association One Thomas Circle Washington, DC 20005
SBCC	Southern Building Code Congress 1116 Brown-Marx Building Birmingham, AL 35203
SMACNA	Sheet Metal and Air Conditioning Contractors National Association, Inc. 8224 Old Courthouse Road Tysons Corner Vienna, VA 22180
SSPWC	Standard Specifications for Public Works Construction Building News, Inc. 3055 Overland Avenue Los Angeles, CA 90034
TEMA	Tubular Exchanger Manufacturer's Association 331 Madison Avenue New York, NY 10017
UBC	Uniform Building Code Published by ICBO
UL	Underwriters Laboratories Inc. 207 East Ohio Street Chicago, IL 60611
UMC	Uniform Mechanical Code Published by ICBO
UPC	Uniform Plumbing Code Published by IAPMO
USBR	Bureau of Reclamation U.S. Department of Interior Engineering and Research Center Denver Federal Center, Building 67 Denver, CO 80225
WWPA	Western Wood Products Association (Formerly called: West Coast Lumberman's Association - WCLA) Yeon Building Portland, CA 97204

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

- END OF SECTION -

SECTION 01100

ARCHAEOLOGICAL PROTECTION

PART 1 - GENERAL

- 1.1 This section covers the requirements for the protection and preservation of historical sites and values.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

- 3.1 CONSTRUCTION METHOD: Representatives of the State will from time to time examine the area as work proceeds. If historical values are noted, the State may order a halt to the work in the vicinity of the historical values until the State can examine further. The Contractor shall notify the State if he finds anything he suspects to be of historic significance and shall discontinue further work in the vicinity of the find until the State can examine the area. In either case, further work in the vicinity of such historical or suspected historical values may proceed only upon approval by the State. Such approval can be normally expected within one week and shall in no case require more than one month.

END OF SECTION

SECTION 01300

SUBMITTALS

PART 1 - GENERAL

1.1 SUBMITTALS

A. Shop drawings shall be required:

1. As called for in the plans, specifications or by the Engineer.

B. Other required submittals shall include:

1. Piping Layout.

2. Manufacturer's Data.

3. Certificates of Warranty.

4. Any others as called for in the plans, specifications, or by the Engineer.

1.2 BIDDER'S SPECIAL RESPONSIBILITY FOR COORDINATING CONTRACTUAL WORK AND SUBMITTALS:

A. The Contractor is responsible for the coordination of all contractual work and submittals.

B. The Contractor shall have a rubber stamp made up in the following format:

CONTRACTOR NAME

PROJECT: \_\_\_\_\_

\_\_\_\_\_

JOB NO: \_\_\_\_\_

THIS SUBMITTAL HAS BEEN CHECKED BY THIS GENERAL CONTRACTOR. IT IS CERTIFIED CORRECT, COMPLETE, AND IN COMPLIANCE WITH CONTRACT DRAWINGS AND SPECIFICATIONS. ALL AFFECTED CONTRACTORS AND SUPPLIERS ARE AWARE OF, AND WILL INTEGRATE THIS SUBMITTAL INTO THEIR OWN WORK.

DATE RECEIVED \_\_\_\_\_

SPECIFICATION SECTION \_\_\_\_\_

SPECIFICATION PARAGRAPH \_\_\_\_\_

DRAWING NUMBER \_\_\_\_\_

SUBCONTRACTOR NAME \_\_\_\_\_  
SUPPLIER NAME \_\_\_\_\_  
MANUFACTURER NAME \_\_\_\_\_

CERTIFIED BY: \_\_\_\_\_

- C. This stamp, "filled in", should appear on the title sheet of each shop drawing, on a cover sheet of submittals in an 8-1/2" x 11" format, or on one face of a cardstock tag (min. 3" x 6") tied to each sample. The tag on the samples should state what the sample is so that, if the tag is accidentally separated from the sample, it can be matched up again. The back of this tag will be used by the Engineer for his receipt, review, and log stamp and for any comments that relate to the sample.
- D. All submittals for material, equipment, and shop drawings listed in the contract documents, including dimensioned plumbing shop drawings, shall be required and shall be reviewed by the Engineer, prior to any ordering of materials and equipment.
- E. Unless otherwise noted, the Contractor shall submit to the Engineer for his review eight copies of all shop drawings, piping layout, and/or catalog cuts for fabricated items and manufactured items (including mechanical and electrical equipment) required for the construction. Drawings shall be submitted in sufficient time to allow the Engineer not less than twenty regular working days for examining the drawings.
- F. The drawing shall be accurate, distinct, and complete and shall contain all required information, including satisfactory identification of items, units and assemblies in relation to the contract drawings and specifications.
- G. Unless otherwise approved by the Engineer, shop drawings shall be submitted only by the Contractor, who shall indicate by a signed stamp on the drawings or other approved means that the Contractor has checked the shop drawings and that the work or equipment shown is in accordance with contract requirements and has been checked for dimensions and relationship with work of all other trades involved. All deviations from the plans and specifications shall be listed. The practice of submitting incomplete or unchecked shop drawings for the Engineer to correct or finish will not be acceptable, and shop drawings which, in the opinion of the Engineer, clearly indicate that they have not been checked by the Contractor will be considered as not complying with the intent of the contract documents and will be returned to the Contractor for resubmission in the proper form.
- H. When the shop drawings have been reviewed by the Engineer, two sets of submittals will be returned to the Contractor appropriately stamped. If major changes or corrections are necessary, the drawing may be rejected and one set will be returned to the Contractor with such changes or corrections indicated, and the Contractor shall correct and resubmit eight copies of the drawings, unless otherwise directed by the Engineer. No changes shall be made by the Contractor to the resubmitted shop drawings other than those changes indicated by the Engineer. The resubmittal shall be so indicated on the shop drawing.

- I. The review of such drawings and catalog cuts by the Engineer shall not relieve the Contractor from responsibility for correctness of the dimensions, fabrication details, and space requirements or for deviations from the contract drawings and specifications, unless the Contractor has called attention to such deviations, in writing, by a letter accompanying the drawings and the Engineer approved the change or deviations, in writing, at the time of submission; nor shall review by the Engineer relieve the Contractor from the responsibility for errors in the shop drawings. When the Contractor does call such deviations to the attention of the Engineer, he shall state in his letter whether or not such deviations involve any deduction or extra cost adjustment.
  
- J. The approval of the above drawings, lists, prints, specifications, or other data shall in no way release the Contractor from his responsibility for the proper fulfillment of the requirements of this contract nor for fulfilling the purpose of the installation nor from his liability to replace the same should it prove defective or fail to meet the specified requirements.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

END OF SECTION

## SECTION 01505

### MOBILIZATION AND DEMOBILIZATION

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

A. Description: This section covers the requirements for mobilization and demobilization.

1.2 MOBILIZATION: Mobilization shall consist of the transporting, assembling, constructing, installing, and making ready for use at the job site, all the equipment, machinery, structures, utilities, materials, labor, and incidentals necessary to do the work covered by this contract.

1.3 DEMOBILIZATION: Demobilization shall consist of the dismantling and removal of the above-mentioned equipment, machinery, structures, utilities, materials, and incidentals, and the cleaning up of the site.

#### PART 2 - PRODUCTS (NOT USED)

#### PART 3 - EXECUTION

3.1 GUIDELINES: If the Contractor utilizes private lands other than the sites provided by the Department for mobilization purposes, the provisions of this section shall apply, and the mobilization and demobilization work on said private lands shall be in accordance with the agreement between the Contractor and the landowner.

Any and all additional mobilization or demobilization costs in excess of the maximum amount specified in the Proposal shall be included in the appropriate unit prices bid in the Proposal. The Contractor shall not receive any compensation for mobilization and demobilization in addition to those specified in the Proposal.

All equipment, machinery, buildings, utilities and incidentals mobilized and demobilized under this section shall remain the property of the Contractor.

END OF SECTION

## SECTION 01530

### BARRICADES

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

- A. Description. This work shall consist of furnishing, installing and maintaining barricades in accordance with the requirements of the contract.

Barricade application shall be provided for in the latest edition of the FHWA publication, Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD), and as amended.

#### PART 2 - PRODUCTS

##### 2.1 GENERAL REQUIREMENTS

- A. Lumber: Lumber for rails, frames and braces shall be dry, sound, undamaged, well-seasoned, and free from any defect which may impair their strength and durability.
- B. Hardware: Nails shall be galvanized wire nails. As many and as large a size as is practicable shall be used.
- C. Paints: Paints shall be exterior enamel paint of the best grade or first line as made by approved manufacturers.
- D. Sheet Reflecting Material: Sheet reflecting material shall conform to the applicable requirements of Subsection 712.20(C) of the "Standard Specifications for Road and Bridge Construction".
- E. Alternative Designs: Alternate barricade designs such as plastic molded barricades may be used subject to the Engineer's approval. The Contractor shall submit shop drawings or catalog cuts for approval.

#### PART 3 - EXECUTION

##### 3.1 CONSTRUCTION REQUIREMENTS

- A. General: Barricades shall be constructed in a first class, workmanlike manner in accordance with details shown on the plans and as specified herein.

Barricades shall be in good condition and approved by the Engineer for use within the project limits. Barricade application and installation shall be as shown on the plans and as directed by the Engineer in accordance with the guidelines provided in the latest edition of the FHWA publication, Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD), and any amendments or revisions thereof as may be made from time

to time.

Sandbags or other approved weights shall be provided where required or as directed by the Engineer. Sandbags or other approved weights shall not be placed on any striped barricade rail.

Steady burn and/or flashing lamps shall be required on selected barricades used during hours of darkness. Locations shall be as shown on the plans and as directed by the Engineer. Lamps shall be attached on the barricade ends closest to the traveled way and shall be visible to the motorist.

Barricades furnished and paid for as provided herein may be used for temporary detours, construction phasing, or other temporary traffic control work.

Barricades furnished and paid for use in temporary detours or construction phasing may be used for permanent locations called for on the plans.

Upon completion of the construction work, barricades shall be left in place, relocated or removed and disposed of as shown on the plans for as directed by the Engineer. Barricades left in place, or relocated to new permanent locations shall become the property of the State. Barricades directed to be removed and disposed of shall become the property of the Contractor.

- B. Painting: Wooden rails, frames and braces shall be given a prime coat of 2 finish coats of new white exterior enamel paint. Rail faces to be reflectorized may be left unpainted unless otherwise specified or directed.
- C. Reflectorization: Reflectorizing of barricade rails shall be done in a first class, workmanlike manner and the attachment of reflective sheeting shall be as shown on the plans, specified herein, or as directed and approved by the Engineer.

Both vertical faces of each barricade rail shall be reflectorized as shown on the plans.

Wooden rails shall be reflectorized with one of the following:

1. Reflective sheeting specified in Subsection 712.20(C)(4) of the “Standard Specifications for Road and Bridge Construction” and backed with a 26 gage galvanized steel sheet, or
  2. a hardened aluminum backed reflective sheeting as specified in Subsection 712.20(C)(5) of the “Standard Specifications for Road and Bridge Construction.”
- D. Color: Rails, frames and braces shall be white.

The front and back faces of barricades shall have 6-inch wide alternative colored and white striped sloping downward toward the traveled way at an angle of 45 degrees with the vertical. The colored stripes shall be either orange or red in accordance with the following requirements:

1. Orange and white stripes shall be used in the following conditions:
    - a. Construction work.
    - b. Detours.
    - c. Maintenance work.
  2. Red and white stripes shall be used in the following conditions:
    - a. On roadways with no outlet (i.e., dead-ends, cul-de-sacs).
    - b. Ramps or lanes closed for operational purposes.
    - c. Permanent or semipermanent closure or termination of a roadway.
- E. Maintenance: Barricades shall be kept in good condition throughout their usage during construction until the end of the contract.
- F. The Constructor shall immediately repair, repaint, clean or replace the barricades as required and as directed by the Engineer to maintain their effectiveness and appearance.

The Constructor shall immediately replace all lost, stolen or damaged barricades, lamps, sandbags and other approved weights.

Barricades used during construction phasing, temporary detours or other temporary traffic control work shall be cleaned and repaired as necessary, prior to being relocated to a permanent location shown on the plans or as directed.

No extra payment will be made for any repair work, repainting, or cleaning of barricades. The Engineer shall determine the suitable condition of each barricade and shall determine when each barricade shall be repaired, repainted or cleaned.

END OF SECTION

## SECTION 01567

### POLLUTION CONTROL

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

###### A. Rubbish Disposal

1. No burning of debris and/or waste materials shall be permitted on the project site.
2. No burying of debris and/or waste material except for materials which are specifically indicated elsewhere in these specifications as suitable for backfill shall be permitted on the project site.
3. All unusable debris and waste material shall be hauled away to an appropriate off-site dump area. During loading operations, debris and waste materials shall be watered down to allay dust.
4. No dry sweeping shall be permitted in cleaning rubbish and fines which can become airborne from floors or other paved areas. Vacuuming, wet mopping or wet or damp sweeping is permissible.
5. Enclosed chutes and/or containers shall be used for conveying debris from above to ground floor level.
6. Clean-up shall include the collection of all wastepaper and wrapping materials, cans, bottles, construction waste materials and other objectionable materials, and removal as required. Frequency of clean-up shall coincide with rubbish producing events.

###### B. Dust

1. The Contractor shall prevent dust from becoming airborne at all times including non-working hours, weekends and holidays in conformance with the State Department of Health, Administrative Rules, Title 11, Chapter 60 - Air Pollution Control.
2. The method of dust control and costs shall be the responsibility of the Contractor. Methods of dust control shall include the use of water, chemicals or asphalt over surfaces which may create airborne dust.
3. The Contractor shall be responsible for all damage claims in accordance with Section 7.16 - "Responsibility for Damage Claims" of the GENERAL CONDITIONS.

C. Noise

1. Noise shall be kept within acceptable levels at all times in conformance with the State Department of Health, Administrative Rules, Title 11, Chapter 46 - Community Noise Control for Oahu. The Contractor shall obtain and pay for the Community Noise Permit from the State Department of Health when the construction equipment or other devices emit noise at levels exceeding the allowable limits.
2. All internal combustion engine-powered equipment shall have mufflers to minimize noise and shall be properly maintained to reduce noise to acceptable levels.
3. Pile driving operations shall be confined to the period between 9:00 a.m. and 5:30 p.m., Monday through Friday. Pile driving will not be permitted on weekends and legal State and Federal holidays.
4. Starting-up of construction equipment meeting allowable noise limits shall not be done prior to 6:45 a.m. without prior approval of the Engineer. Equipment exceeding allowable noise levels shall not be started-up prior to 7:00 a.m.

D. Erosion

1. During interim grading operations, the grade shall be maintained so as to preclude any damage to adjoining property from water and eroding soil.
2. Temporary berms, cut-off ditches and other provisions which may be required because of the Contractor's method of operations shall be installed at no cost to the State.
3. Drainage outlets and silting basing shall be constructed and maintained as shown on the plans to minimize erosion and pollution of waterways during construction.

E. Others

1. Wherever trucks and/or vehicles leave the site and enter surrounding paved streets, the Contractor shall prevent any material from being carried onto the pavement. Wastewater shall not be discharged into existing streams, waterways, or drainage systems such as gutters and catch basins unless treated to comply with the State Department of Health water pollution regulations.
2. Trucks hauling debris shall be covered as required by PUC Regulation. Trucks hauling fine materials shall be covered.
3. No dumping of waste concrete will be permitted at the jobsite.

4. Except for rinsing of the hopper and delivery chute, and for wheel washing where required, concrete trucks shall not be cleaned on the job-site.
5. Except in an emergency, such as a mechanical breakdown, all vehicle fueling and maintenance shall be done in a designated area. A temporary berm shall be constructed around the area when runoff can cause a problem.
6. When spray painting is allowed such spray painting shall be done by the "airless spray" process. Other types of spray painting will not be allowed.

F. Suspension of Work

1. Violations of any of the above requirements or any other pollution control requirements which may be specified in the Technical Specifications herein shall be cause for suspension of the work creating such violation. No additional compensation shall be due the Contractor for remedial measures to correct the offense. Also, no extension of time will be granted for delays caused by such suspensions.
2. If no corrective action is taken by the Contractor within 72 hours after a suspension is ordered by the Engineer, the State reserves the right to take whatever action is necessary to correct the situation and to deduct all costs incurred by the State in taking such action from monies due the Contractor.
3. The Engineer may also suspend any operations which he feels are creating pollution problems although they may not be in violation of the above-mentioned requirements. In this instance, the work shall be done by force account as described in Subsection 4.2b - "Additional Work" of the GENERAL CONDITIONS and paid for in accordance with Subsection 8.4b - "Force - Account Work" therein. The count of elapsed working days to be charged against the contract in this situation shall be computed in accordance with Subsection 7.18 - "Contract Time" of the GENERAL CONDITIONS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

END OF SECTION

## SECTION 01581

### PROJECT SIGN

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

Furnish all labor, materials and equipment necessary to construct and install all project sign as specified hereinafter.

##### 1.2 SUBMITTAL

The contractor shall provide the Engineer with six (6) shop drawings of the project sign for review and approval by the Engineer prior to ordering the sign.

##### 1.3 LETTER STYLE

Copy is centered and set in Adobe Type Futura Heavy. If this specific type is not available, Futura Demi Bold may be substituted. Copy should be set and spaced by a professional typesetter and enlarged photographically for photo stencil screen process.

##### 1.4 ARTWORK

Constant elements of the sign layout - frame, outline, stripe, and official state information - may be duplicated following drawing measurements or be reproduced and enlarged photographically using a layout template if provided. The "STATE OF HAWAII" masthead should be reproduced and enlarged as specified, using the artwork provided.

##### 1.5 TITLES

The specific major work of the project under construction is emphasized by using 3-3/4" type, all capitals. Secondary information such as location or buildings uses 2-1/4" type, all capitals. Other related information of lesser importance uses letter heights as indicated on 01581-3, upper / lower case letters.

Design should follow the example on page 01581-3.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

#### A. LUMBER

1. Panel is 3/4" exterior grade high density overlaid plywood, with resin-bonded surfaces on both sides.
2. 4"x4" signposts shall be Douglas Fir No. 1 or better.

#### B. PAINTS & INKS

Screen print inks are matte finish. Paints are satin finish, exterior grade. References to Ameritone Color Key Paint are for color match only.

COLOR:	1.	1BL10A	Bohemian Blue
	2.	2H16P	Softly (White)
	3.	2VR2A	Hot Tango (Red)
	4.	1M52E	Tokay (Gray)

#### C. CONCRETE

Concrete shall be class B with a 2,500 psi 28-day compressive strength.

## PART 3 - EXECUTION


### 3.1 GENERAL

- A. The Project Sign shall be constructed with new materials as specified above.
- B. The Project sign shall be installed at the location indicated on the drawings or as designated by the Engineer. The project sign shall be erected upon commencement of work.

### 3.2 MEASUREMENTS AND PAYMENT

The construction of the project sign, including all equipment, labor and material necessary to furnish and install the project sign will be paid for under the "Project Sign" proposal item.

END OF SECTION

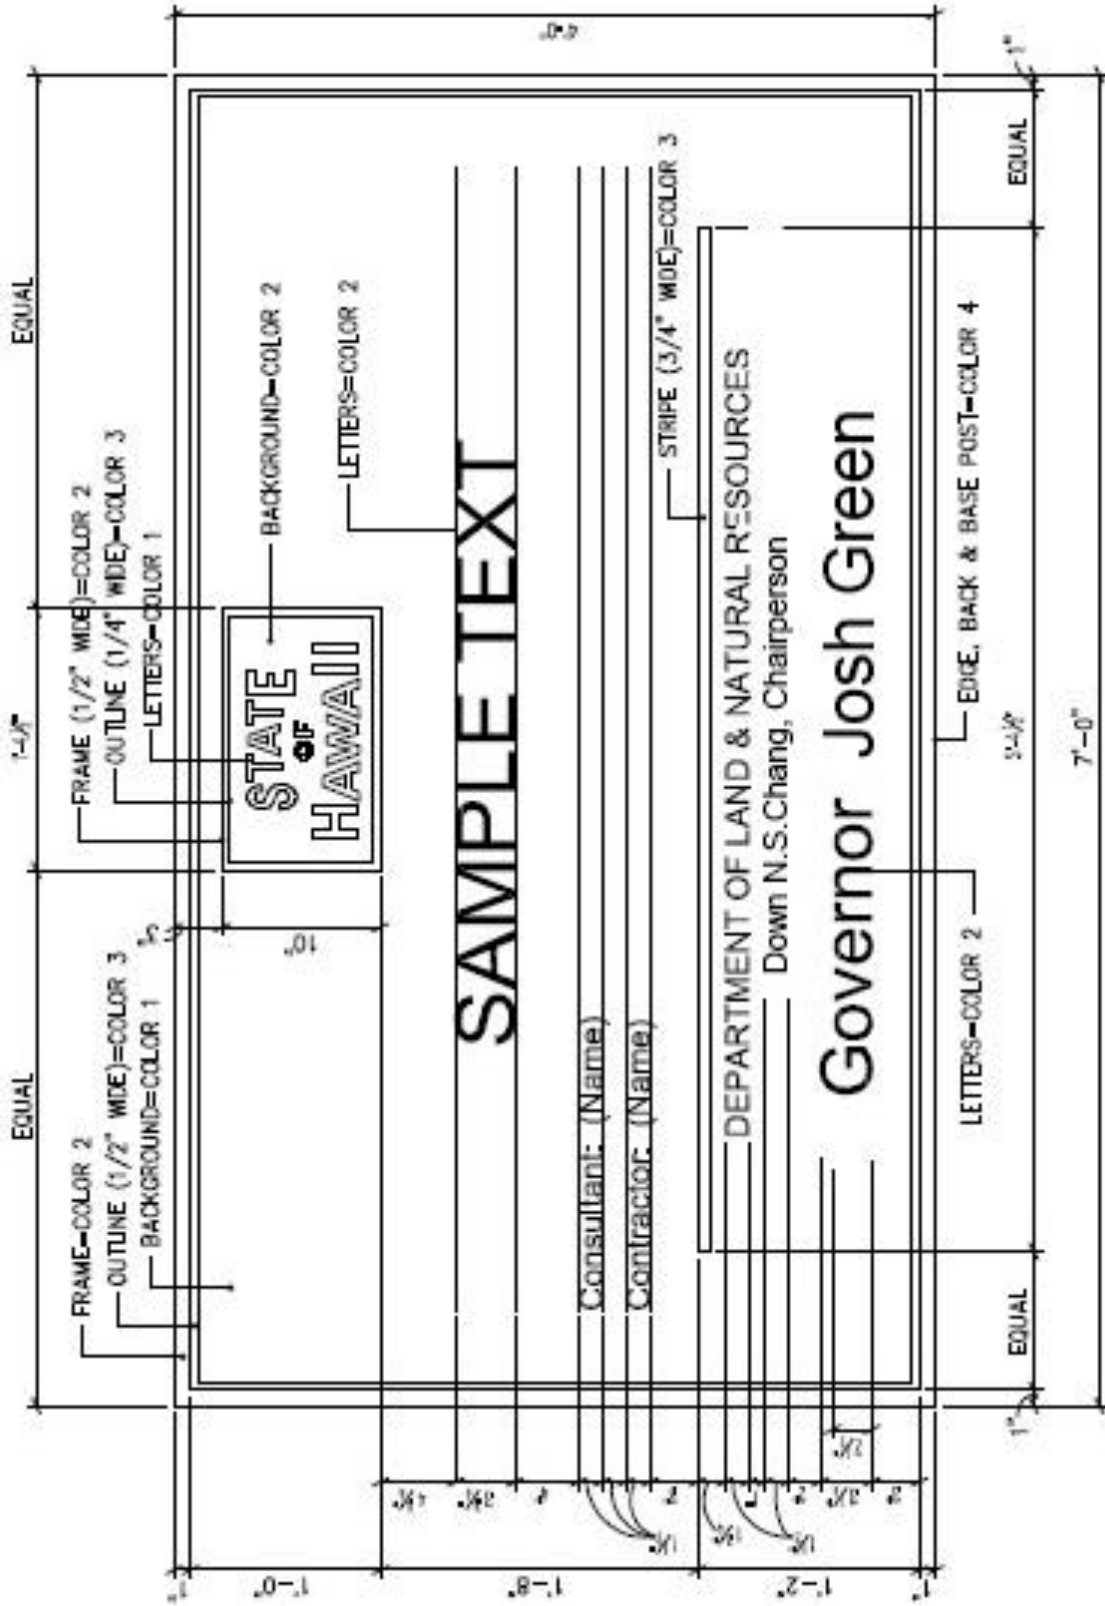

NOTE: Number of signs required 1.

SECTION 02050  
EROSION CONTROL

PART 1 – GENERAL

1.1 SECTION INCLUDES

- A. Temporary and permanent erosion control systems as well as any other slope protection procedures called for on the plans.

1.2 SUBMITTALS

- A. Furnish manufacturer's documentation to the Engineer that the materials meet the requirements listed herein. Provide the mill certificate, signed by a legally authorized officer from the manufacturer for each consignment. The mill certificate shall state that the material in that shipment meets the requirements listed herein and provide proof of test results for minimum roll values.
- B. Upon request by the Engineer, supply product samples prior to acceptance of the material. Engineer reserves the right to perform acceptance tests on the samples prior to acceptance of the material. The Engineer reserves the right to collect samples periodically during installation for confirmation testing.
- C. A BMP Plan shall be reviewed and approved by the Engineer prior to installation of erosion control measures.

1.3 DELIVERY, HANDLING, AND STORAGE

- A. Deliver material to the project site in such quantities and at such times to assure the continuity of the installation. Protect material during on-site storage.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. The Contractor shall protect adjacent properties and water resources from erosion and sediment damage in accordance with the Contract Documents.
- B. The general contractor will be required to designate, by name, a certified staff person for implementation of all erosion control measures for this project. Specific responsibilities will include:
  - 1. Assuring and certifying the contractor's construction sequence is in conformance with the specified schedule. A weekly certification stating

compliance, any deviations, and corrective measures shall be filed with the Engineer.

2. Inspection of the project work site on a weekly basis, with the installation of added erosion control measures in areas which appear vulnerable to erosion.
3. Inspection of all erosion control measures after any significant rainfall. Accumulated silt/sediment should be removed when the depth of sediment reaches 50% of the barrier height. Accumulated silt/sediment should be removed from behind silt fencing when the depth of the sediment reaches 6 inches. A significant rainfall shall be defined as over 1/2 inch of precipitation in any consecutive 24-hour period.

## PART 2 – PRODUCTS

### 2.1 EROSION CONTROL MATERIALS

- A. Hydro-seed. Hydro-seed materials shall be as specified in the plan notes.
- B. Compost filter socks. Compost filter socks shall be as shown on the erosion control plan.
- C. Crushed rock and geotextile fabric for construction ingress/egress. Construction ingress/egress shall be as shown on the erosion control plan.

## PART 3 – EXECUTION

### 3.1 PREPARATION

- A. Site erosion control plans/details shall be used as a guide and implemented as a minimum. Contractor shall assess the site and submit a BMP plan for review and approval prior to starting work.
- B. Deficiencies or changes in the erosion control plan as it is applied to current conditions will be brought to the attention of the Engineer for remedial action.

### 3.2 EROSION CONTROL AND SLOPE PROTECTION IMPLEMENTATION

- A. Place erosion control systems in accordance with the erosion control plan and in accordance with approved installation procedures.
- B. The Engineer has the authority to limit the surface area of erodible earth material exposed by clearing and grubbing, excavation, borrow and embankment operations. The Engineer has the authority to direct the Contractor to provide immediate permanent or temporary pollution control measures. The Contractor will be required

to incorporate all permanent erosion control features into the project at the earliest practical time to minimize the need for temporary controls.

- C. Erosion control measures for grading shall include vegetative cover by means of hydroseeding where called for in the contract documents. See plan notes for details regarding temporary and permanent vegetative cover including seed material.
- D. The temporary erosion control systems installed by the Contractor shall be maintained as directed by the Engineer to control siltation at all times during the life of the Contract. The Contractor must respond to any maintenance or additional work ordered by the Engineer within a 48-hour period.
- E. Any additional material work required beyond the extent of the erosion control plan shall be paid for by the Owner except where such measures are required to correct deficiencies caused by the failure of the Contractor to construct the work in accordance with the erosion sediment control plan.
- F. Slopes that erode easily shall be temporarily seeded as the work progresses with a cereal grain of wheat, rye or oats.
- G. All disturbed areas shall be restored upon completion of the work.

### 3.3 COMPOST FILTER SOCK INSTALLATION

- A. Compost filter socks shall be installed to the extents shown in the contract documents. Clear alignment of shrubs, trees, boulders, and other debris where alignment is defined.
- B. Installation shall be done according to the manufacturer's recommendations and the erosion control plan. Discrepancies shall be brought to the attention of the Engineer for clarification.
- C. Compost filter socks shall be anchored and/or stabilized using wooden stakes or other approved methods. Overlap as required.
- D. Inspection and maintenance shall be performed according to the erosion control plan.

### 3.4 CONSTRUCTION INGRESS/EGRESS INSTALLATION

- A. Excavate areas for construction ingress/egress to the extents shown in contract documents. Contractor shall exercise care not to damage existing roadways or adjacent property.
- B. Rough grade the area to relatively even surface.

- C. Place geotextile filter fabric. Spread fabric evenly and smoothly over the area and overlap fabric sheets as needed and required by the contract documents.
- D. Place crushed rock on filter fabric. Distribute and compact to create an even surface and smooth transition to the surrounding grade.

### 3.5 MEASUREMENT AND PAYMENT

Erosion Control will be paid on a lump sum basis. Measurement for payment will not apply. Payment will be full compensation for the work prescribed in this section and the contract documents.

END OF SECTION

## SECTION 02100

### SITE PREPARATION

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

The work to be performed under this section shall include clearing the premises of all obstacles and obstructions, the removal of which will be necessary for the proper reception, construction, execution and completion of the other work included in this contract.

#### PART 2 - PRODUCTS (NOT USED)

#### PART 3 - EXECUTION

##### 3.1 GENERAL

- A. Install erosion control and best management practices prior to any ground disturbing activities.
- B. Maintenance of Traffic: The Contractor shall conduct operations with minimum interference to streets, driveways, sidewalks, passageways, etc.

When necessary, the Contractor shall provide and erect barriers, etc., with special attention to protection of the public and personnel.

- C. Protection: Throughout the progress of the work protection shall be provided for all property and equipment, and temporary barricades shall be provided as necessary. Work shall be done in accordance with the safety provisions of the Manual of Accident Prevention in Construction, published by the Associated General Contractors of America, and the State of Hawaii's Occupational Safety and Health Standards, Rules and Regulations.
- D. Fires: No burning of fires of any kind will be allowed.
- E. Reference Points: Benchmarks, etc., shall be carefully maintained, but if disturbed or destroyed, shall be replaced as directed, at the Contractor's expense.
- F. Disposal: All materials resultant from operations under this Section shall become the property of the Contractor and shall be removed from the site. Loads of materials shall be trimmed to prevent droppings.

### 3.2 EXISTING UTILITY LINES

The existence of active underground utility lines within the construction area is not definitely known other than those indicated in their approximate locations on the Drawings. Should any unknown line be encountered during excavation, the Contractor shall immediately notify the Engineer of such discovery. The Engineer shall then investigate and issue instructions for the preservation or disposition of the unknown line. Authorization for extra work shall be issued by the Engineer only as he deems necessary.

### 3.3 CLEARING AND GRUBBING

- A. The Contractor shall clear and grub the premises in accordance with Section 02110 – Clearing and Grubbing, and to the extent required by the contract documents.
- B. All trees and vegetation shall be chipped onsite and used as mulch covering for erosion control and restoration of the site. This work shall be at no additional cost to the State.
- C. Large logs, stumps and all other materials that cannot be chipped shall be disposed of in accordance with applicable regulations at an approved disposal site at no additional cost to the State.

### 3.4 CLEAN UP OF PREMISES

Clean up and remove all debris accumulated from building operations from time-to-time as directed. Upon completion of the construction work and before final acceptance of the contract work, remove all surplus materials, equipment, scaffoldings, etc., and leave entire job site raked clean and neat to the satisfaction of the Engineer.

### 3.5 MEASUREMENT AND PAYMENT

Site Preparation will not be paid separately. The cost will be considered included in the cost for the various contract items.

END OF SECTION

## SECTION 02110

### CLEARING AND GRUBBING

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

This section covers the requirements for clearing and grubbing, within the areas shown on the plan or as directed by the Engineer. The above work shall include the removal and disposal of trash, litter and all other debris encountered on the project. Also included is the protection from injury or defacement of trees and other objects designated to remain and treatment or removal of damaged trees.

#### PART 2 - PRODUCTS (NOT USED)

#### PART 3 - EXECUTION

##### 3.1 CLEARING AND GRUBBING WORK:

- A. The areas for clearing and/or grubbing shall be to the limits shown on the plans or as noted on the plans.
- B. Clear and grub all trees, tree stumps, and vegetation for areas that require excavation or grading, to the limits of the improvements.
- C. Trees with major roots exposed by construction that are rendered unstable shall be felled and disposed of as specified herein at no further cost to the State.
- D. Felling, cutting, and trimming methods shall not cause bark damage to standing timber. If damage does occur to standing trees, the injured area shall be treated with a coat of tree surgery asphalt-based paint.
- E. The Contractor shall protect from injury and damage all surrounding trees, plants, etc., and shall leave all in as good as condition as at present. Any damage to existing improvements shall be repaired or replaced by the Contractor to the satisfaction of the Engineer.
- F. Clear and grub to provide access to construction areas, drives, and where grade is to be razed of shrubs, trees, stumps, vegetation, rubbish, and other perishable or objectionable matter.

## SECTION 02200

### EARTHWORK

#### PART 1 - GENERAL

##### 1.1 GENERAL REQUIREMENTS

This section covers the requirements for earthwork, including excavation for pavements, gravel roads, porous pavement, staging and parking areas, and grading.

It shall be the responsibility of the Contractor to examine the project site and determine for himself the existing conditions. Obvious conditions of the site existing on the date of the bid opening shall be accepted as part of the work, even though they may not be clearly indicated on the drawings and/or described herein or may vary therefrom.

##### 1.2 WORK INCLUDES

- A. Excavating, separating, hauling, stockpiling, backfilling, compacting, and grading of soils and gravel.
- B. The excavation of all material encountered within the limits of work, the on-site placement or the stockpiling of suitable site material, and the satisfactory disposal of unsuitable site material such as rock, rubble, rubbish and any surplus suitable site material.

##### 1.3 REMOVAL AND REPAIR WORK

The Contractor shall exercise every precaution to preserve and protect all structures, pavements, fences, gates, walkways or utility improvements, and landscaping which are to remain. All damages shall be repaired and restored to original or better condition upon completion of the work at no additional cost to the State.

##### 1.4 SEQUENCE OF WORK

All sequence of work shall be subject to the approval of the Engineer.

##### 1.5 PROTECTION

- A. Barricade: Temporary barricades shall be as specified in Section 01530 – Barricades.

- B. Take all precautions and safety measures as required to protect the State of Hawaii free and harmless from liability of any kind. Conduct operations with minimum interference to streets, driveways, passages, etc.
- C. Adequate precautions shall be taken before commencing and during the course of the work to ensure the protection of life, limb, and property.
- D. The Contractor shall protect from damage all surrounding structures, trees, plants, grass, walks, pavements, etc. that are to remain. Any damage will be repaired or replaced by the Contractor to the satisfaction of the Engineer at no additional cost to the State.

#### 1.6 PERMITS

- A. The Contractor shall apply, obtain, and pay for all necessary permits prior to the commencement of work, and shall comply with applicable permits during construction.

#### 1.7 CONSTRUCTION LINES, LEVELS AND GRADES

- A. The Contractor shall verify all lines, levels and elevations indicated on the drawings before any clearing, excavation or construction begins. Any discrepancy shall be immediately brought to the attention of the Engineer and any changes shall be made in accordance with his instructions. The Contractor shall not be entitled to extra payment if he fails to report the discrepancies before proceeding with any work whether within the area affected or not.
- B. The laying out of base lines, establishment of grades and staking out the entire work shall be done by a licensed Surveyor or a licensed Civil Engineer, registered in the State of Hawaii. He shall be solely responsible for their accuracy. Erect and maintain substantial batter boards showing construction lines and levels.

#### 1.8 CLEANUP

Clean up and remove all debris accumulated from construction operations from time to time, and as directed by the Engineer. Upon completion of the construction work and before final acceptance of work, remove all surplus materials, equipment, etc. and leave entire jobsite clean and neat.

#### 1.9 REFERENCES

- A. Latest version of American Society for Testing and Materials (ASTM) standards:
  - 1. ASTM D 698, Standard Test Method for Laboratory Compaction of Soil using Standard Effort (12,400 ft-lb/ft<sup>3</sup> [600kN-m/m<sup>3</sup> ])

2. ASTM D 1557, Test Method for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lb/ft<sup>3</sup> [2,700 kN-m/m<sup>3</sup>]).
3. ASTM D 2216, Standard Test Method for Laboratory Determination of Water (Moisture) Content of Soil and Rock.
4. ASTM D 2487, Standard Classification of Soils for Engineering Purposes (Unified Soil Classification System).
5. ASTM D 4220, Standard Practices for Preserving and Transporting Soil Samples.
6. ASTM D 6913, Standard Test Methods for Particle-Size Distribution (Gradation) of Soils Using Sieve Analysis.
7. ASTM D 6938, Standard Test Methods for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth).

B. OSHA 29 CFR Part 1926, Occupational Safety and Health Standards – Excavations.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. All earthwork material shall conform to the HDOT Standard Specifications, unless stated otherwise on the plans.

## PART 3 - EXECUTION

### 3.1 EXCAVATION

Excavation shall be done to the lines and grades indicated. Excavated materials declared unusable by Engineer shall be removed from the site at the Contractor's expense.

### 3.2 GRADING

The project site shall be graded to finish and existing grade. Grading shall conform with the ordinances of the applicable County issuing the Grading Permit and as amended. Topsoil shall be spread evenly, compacted lightly and raked to a uniform place at required contours and grades.

### 3.3 EMBANKMENT

- A. Work shall consist of clearing, excavating, filling, and grading as necessary to construct the site per the Contract Documents.
- B. Embankment construction shall include the placing of suitable earth fill in the locations stipulated in the construction drawings to obtain the required lines, grades and cross-sections shown on the drawings. Materials shall be deposited and spread in uniform layers of specified thickness, for the full width of the embankment. Each layer shall be shaped to line and cross-section and thoroughly compacted before the succeeding layer is placed.
- C. Where embankment is being placed on side fill or sloping sections, the lower portion shall be constructed as above, until a full width surface of the specified cross-section is obtained. The embankment shall be completed thereafter with full width layers.
- D. Contractor shall remove existing vegetation over the areas that are to receive earth materials.

### 3.4 MATERIAL PLACEMENT

- A. Inspect subgrade before placement of earth materials.
- B. Maintain lifts to provide positive drainage away from construction.
- C. Do not place materials such as stumps, logs, brush, or other undesirable materials over the slopes or within the embankment.

### 3.5 COMPACTION

- A. Earth materials shall be spread and bladed smooth in successive layers not exceeding 12 inches in compacted thickness to the full width of the cross-section, unless otherwise directed by the Engineer.
- B. Each layer of earth materials shall be compacted to a minimum of ninety (90%) of Modified Proctor Density. The material shall be compacted at the optimum moisture content, or up to two percent (2%) higher than optimum, as directed by the Engineer.
- C. Compaction testing is required. Subgrade shall be inspected by the Engineer in the field.
- D. All sampling and testing shall be performed by an independent testing agency and all test results submitted to the Engineer for approval. All cost of sampling and testing shall be borne by the Contractor.

### 3.6 CONTROL OF MOISTURE CONTENT

- A. The moisture content of the earth materials used for construction shall be such that the specified compaction can be obtained with the equipment used. The moisture content of the fill shall be maintained within the limits to:
1. Prevent the bulking of the material under the action of the hauling or compaction equipment,
  2. Prevent adherence of the fill material to the equipment,
  3. Ensure the crushing and blending of the soil clods and aggregation into a homogeneous mass, and
  4. Contain adequate moisture so that a sample can be hand molded.
- B. Do not compact embankment material if the moisture content causes excessive rutting by the hauling equipment, or excessive displacement or distortion under the compacting equipment. If these conditions exist, allow the materials to dry before compacting. If necessary, accelerate drying the materials by aerating or by using blade graders, harrows, discs, or other appropriate equipment to manipulate the material. No additional compensation will be provided for soil conditioning or use of additives to attain required percent moisture.

### 3.7 FINAL GRADE

- A. The Contractor shall, as soon as practicable, bring the site grades to the correct widths, lines and elevation as shown on the drawings.
- B. All surfaces shall be maintained to the specified grade and cross-section and to the specified density until the project or that portion of the project is accepted.

### 3.8 VEGETATIVE COVER

Graded areas shall receive vegetative cover where specified in the plans. See Section 02050 – Erosion Control and plan notes for details.

### 3.9 MEASUREMENT AND PAYMENT

Earthwork will be paid on a lump sum basis. Measurement for payment will not apply. Payment will be full compensation for the work prescribed in this section and the contract documents.

END OF SECTION

SECTION 02220  
SITE DEMOLITION

PART 1 - GENERAL

1.1 GENERAL REQUIREMENTS

This section describes demolition work as stated in the contract documents.

1.2 DESCRIPTION

Work under this section includes, but is not limited to, demolition of existing AC pavement, gates and posts, and any other as described in the contract documents.

1.3 SUBMITTALS

- A. Submit a demolition work plan to coordinate work with the Officer-in-Charge.

PART 2 – PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 GENERAL

A. Existing Conditions

1. The Drawings show general information only. Examine the site to determine the exact existing conditions and character and extent of the work to be performed and demolition operations required to complete the new work.
2. The failure or omission of the Contractor to visit the site and acquaint himself with the existing conditions shall in no way relieve him from obligations with respect to his bid or to his Contract.

B. Existing Utilities

1. Existing underground lines shown on the Drawings are shown from the best possible information available. Verify all utility line locations prior to the start of any work.
2. It is understood and agreed that certain lines cannot be or have not been located and no indication is contained on any of the Drawings or referred to in the specifications (i.e. storm drainage, electrical, plumbing, sewer, water, or telephone); therefore, exercise extreme caution during demolition and like work. Should any such lines encountered, written notice shall be given to the Officer-in-

Charge, and no further work in the area shall proceed until adequate investigation has been made, the line identified, and instructions are issued as to how to proceed.

3. The Contractor shall be liable for any and all damages associated with his activities which may disrupt services as a result or any utility line damage.

C. Barricades

Provide barricades, warning (signs and lighting), and maintenance and supervision thereof, in accordance with applicable Federal, State and local codes, or as may be directed from time to time.

D. Equipment

The use of proper equipment is the responsibility of the Contractor.

E. Protection of Property

Existing appurtenances and improvements, which are to remain, shall be protected from damage due to work under this section.

F. Protection of Utilities

Preserve in operating condition all active utilities traversing or within and about the site; protect all such property and items, including but not limited to piping, mains, laterals, valve boxes, meters, and other appurtenances and structures. Promptly repair and notify the affected utility company of any damage to such utility or work caused by work under this Contract.

G. Protection of Trees and Plant Materials to Remain

Tree protection shall be as described in the landscaping plans.

### 3.2 DEMOLITION

Demolition activities shall be performed in the manner stated and to the extents specified in the approved demolition plan. All BMP and safety measures shall be in place prior to the start of demolition work.

A. Gates, Posts, Utilities and Other Structures

Demolish existing structures and utilities where shown in the contract documents. Remove all components and dispose of the resultant debris in accordance with this section.

B. Tree Removal

Tree removal shall be performed in accordance with the landscape plans.

C. Relocation

Remove and relocate existing facilities to the designated new locations as shown in the contract documents.

3.3 CLEANUP

- A. Removal of Demolished Material: Remove all waste material from the project site and comply with all applicable government regulations in disposing of said waste material.
- B. All materials and equipment to be removed, except that indicated to be reused or delivered as directed by the Officer-in-Charge, shall become the property of the Contractor and shall be removed from the site.
- C. Remove debris resulting from this work from the site as promptly as it accumulates.
- D. Cleanup: Remove all evidence of demolition work and leave areas impacted by demolition work in clean and debris-free condition.

3.4 MEASUREMENT AND PAYMENT

Demolition Work will be paid on a lump sum basis. Measurement for payment will not apply. Payment will be full compensation for the work prescribed in this section and the contract documents.

Relocation of existing facilities and tree protection/removal shall not be considered included and will be paid for separately as shown in the Proposal.

END OF SECTION