



EXFIL[®] FACE SHIELD

PERFORMANCE STANDARDS

BS EN 166:2002 Class 2B



SIZING / COMPATIBILITY

- › Available in size 1 or size 2
- › Compatible with EXFIL[®] Ballistic SL of respective size
- › Compatible with EXFIL[®] Ballistic of respective size fitted with an EXFIL[®] Rail 3.0 System

COLORS

- Black (FED-STD-595C #37031)
- Coyote Brown (FED-STD-595C #20150)
- Ranger Green (Pantone 7770c)

WEIGHT

Size 1: 0.51 lbs (230 g)
Size 2: 0.56 lbs (252 g)

ENVIRONMENTAL CONDITIONS / MIL-STD-810G METHODS

501.5P1 High Temperature | 502.5P1 Low Temperature
507.5 Humidity | 509.5 Salt Fog | 510.5P1 Blowing Sand/Dust
514.6 Loose Cargo Vibration | 500.5P1 Low Pressure (Altitude)

A low profile, lightweight face shield system that mounts quickly and tool-free to the front section of the EXFIL® Rail 3.0, protecting the face from liquids and various projectiles. Quickly adjusts into three preset positions (down, up and stowed) and provides clearance for NVG mounts when in the stowed position.

PERFORMANCE / COVERAGE


- › Exceeds optical and strength requirements of BS EN 166:2002 Class 2B
- › Coverage area of 50.2 in² (323.9 cm²)

Materials

- › Glass reinforced polycarbonate and nylon frame components
- › Polycarbonate lens
- › Stainless steel hardware

Part Numbers

Size 1 Black: 76-VRT-BK1
Size 2 Black: 76-VRT-BK2
Size 1 Coyote Brown: 76-VRT-CB1
Size 2 Coyote Brown: 76-VRT-CB2
Size 1 Ranger Green: 76-VRT-RG1
Size 2 Ranger Green: 76-VRT-RG2

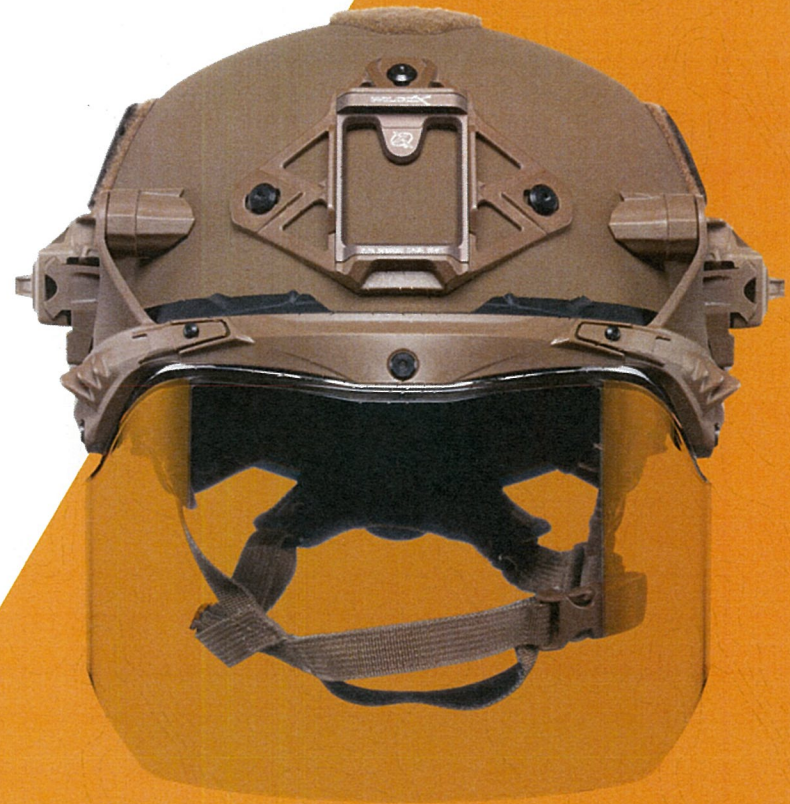

0405