

NOTE: ROOM DIMENSIONS, LOCATION OF LIGHT SWITCHES, OUTLETS, AND OTHER ELECTRICAL ENTITIES WILL NEED TO BE VERIFIED PRIOR TO ORDERING.

4-POST EXACT SHELVING ON MOBILE 1000 SYSTEM
92" UPRIGHTS, 6-TIER (FIXED) & 65" UPRIGHTS, 4-TIER (MOBILE)
LETTER - BINDER/BOOK/BOX FILING
TOTAL LF: 9,714
2 DIVIDERS PER SHELF
CARPETED DECKING
ADA RAMP

4-POST EXACT SHELVING ON KWIK TRACK
86" UPRIGHTS, 6-TIER (FIXED) & 65" UPRIGHTS, 4-TIER (MOBILE)
LETTER - BINDER/BOOK/BOX FILING
TOTAL LF: 1,950
2 DIVIDERS PER SHELF

GRAND TOTAL LF: 11,664

NOTE: SARCO MOBILE 1000 SYSTEMS ARE BEST INSTALLED ON SOLID FLOORING LIKE CONCRETE OR CONCRETE W/ VCT TILE. REMOVAL OF CARPET IS STRONGLY RECOMMENDED. INSTALLATION ON CARPET SHOULD ONLY BE CONSIDERED IF UNPADDED AND LOW PROFILE.

4-POST SHELVES ADJUST IN 1.5" INCREMENTS & ARE .75" THICK


NOTE: AMWK - WALL ANCHOR KITS HAVE BEEN INCLUDED IN THIS QUOTE. ONLY THE HARDWARE FOR ATTACHING WALL BRACKETS TO THE 4-POST SHELVING HAVE BEEN INCLUDED. HARDWARE FOR WALL ATTACHMENT MUST BE PURCHASED BY INSTALLER. PLEASE CONFIRM WHAT TYPE OF HARDWARE IS REQUIRED PRIOR TO INSTALLATION.

KWIK TRACK INSTALLATION NOTE: DUE TO VARIATIONS IN FLOOR LEVEL, ADDITIONAL SHIMMING MATERIAL (MASONITE) MAY BE REQUIRED AND IS TO BE PURCHASED LOCALLY BY THE INSTALLER.

NOTE: MOBILE LITE & KWIK-TRACK PRODUCT REQUIRE THE REMOVAL OF CARPET & PADDING FOR THE LENGTH & WIDTH OF EACH RAIL/TRACK. FAILURE TO DO SO WILL PREVENT THE SYSTEM FROM BEING LEVELED PROPERLY AND AFFECT THE FUNCTIONALITY OF THE SYSTEM.

KWIK TRACK NOTE: SARCO DOES NOT RECOMMEND CUTTING TRACK BECAUSE IT WILL DECREASE ACCESS TO THE FIXED SHELVING BETWEEN THE MOBILE CARRIAGES

KWIK TRACK INSTALLATION NOTE: TRACK TO BE CUT DOWN ON SITE AND TRACK STOP MOUNTING HOLE BE LOCATED SO TRACK STOP BUMPER CAN BE INSTALLED.

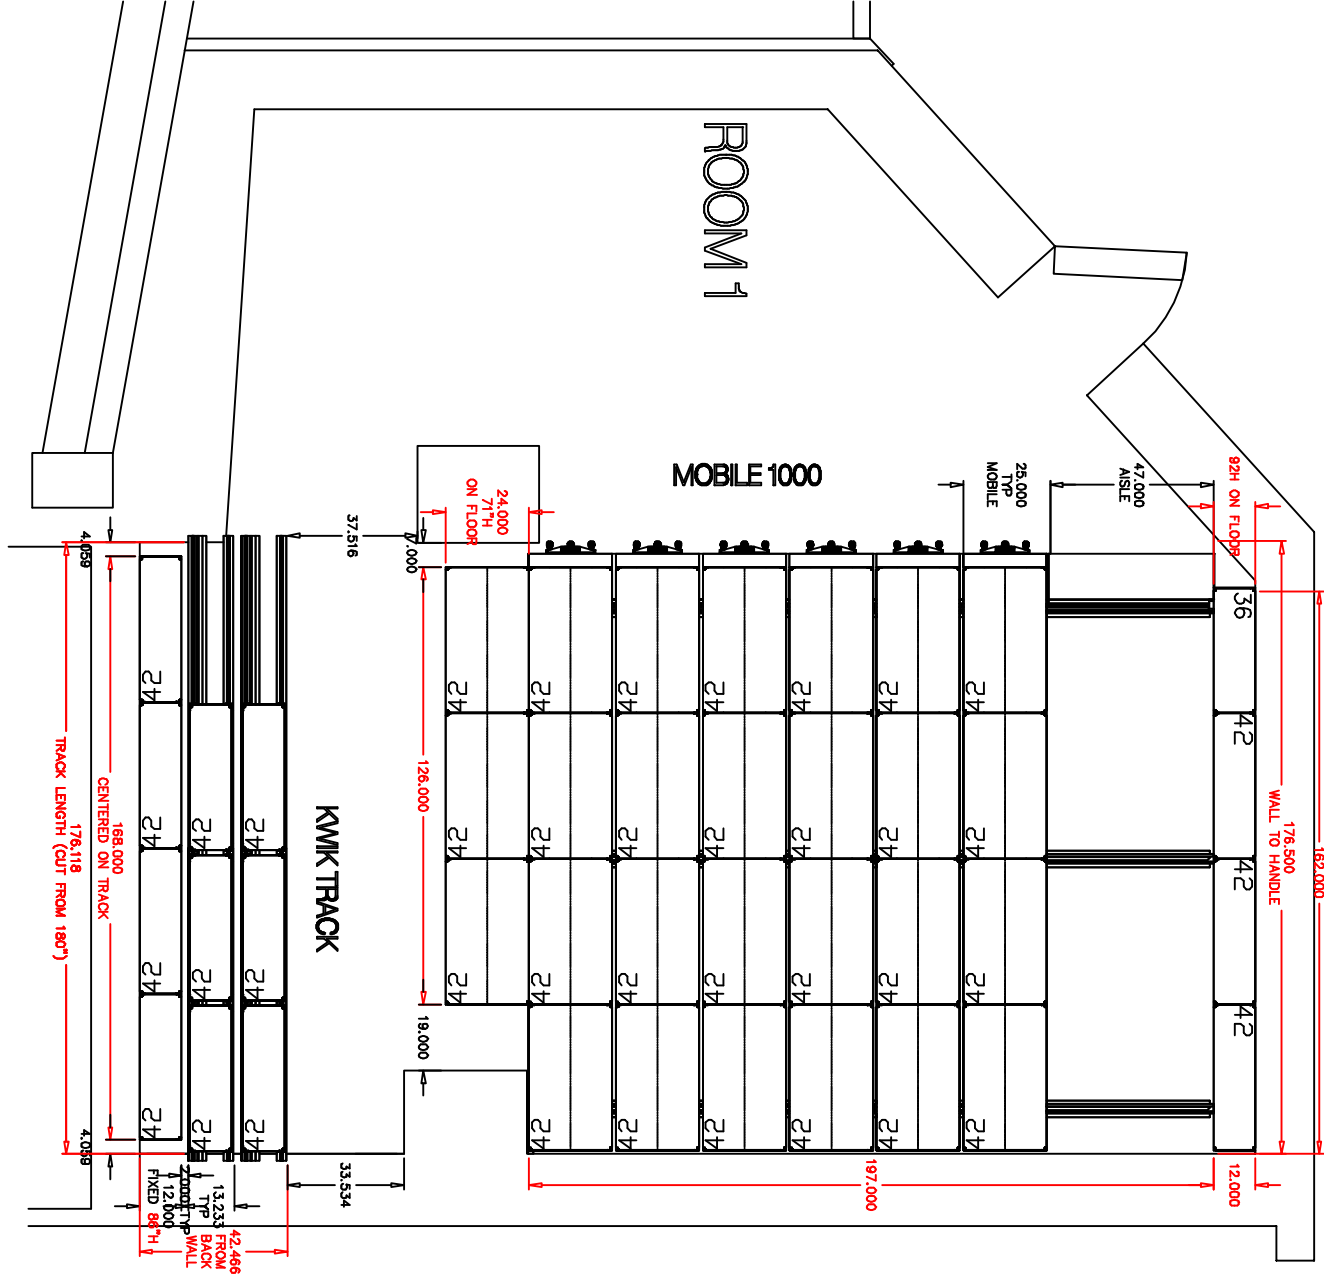


Authorized Signature _____ Date _____

Rev. Notes -

Signature Required: By signing this drawing, the authorized dealer, rep or customer has confirmed all room dimensions, doorway sizes, column location and outside dimensions, ceiling heights and obstructions. This signed drawing must be submitted with purchase order and all finish options.

BY: APRIL NASCENE
PROJECT NUMBER: OP6394
DATE: 7/29/2026
PROJECT NAME: DOH Vital Records

SAFCO®

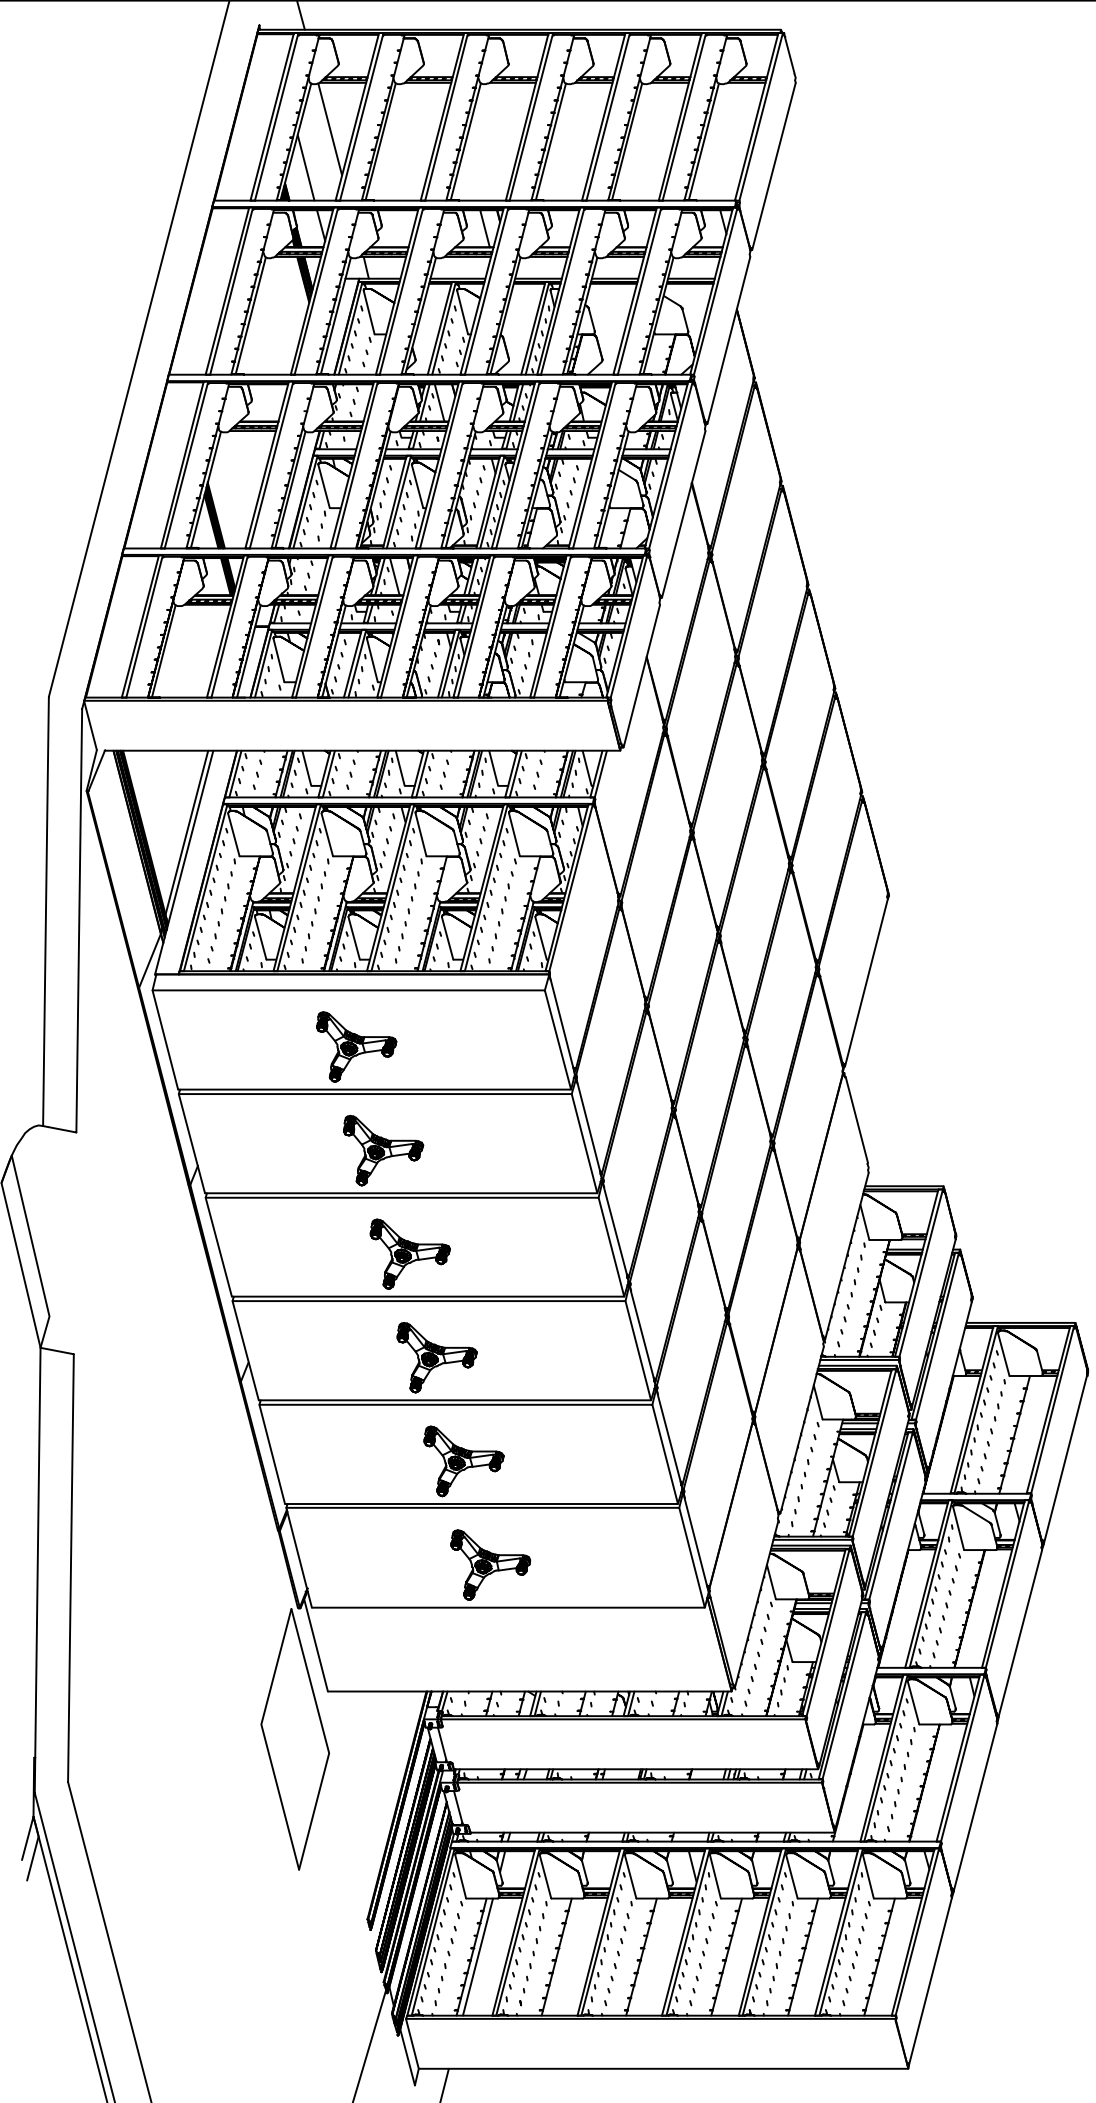


BY: APRIL NASCENE

PROJECT NUMBER: OP6364

DATE: 7/29/2026

PROJECT NAME: DOH Vital Records

SAFCO

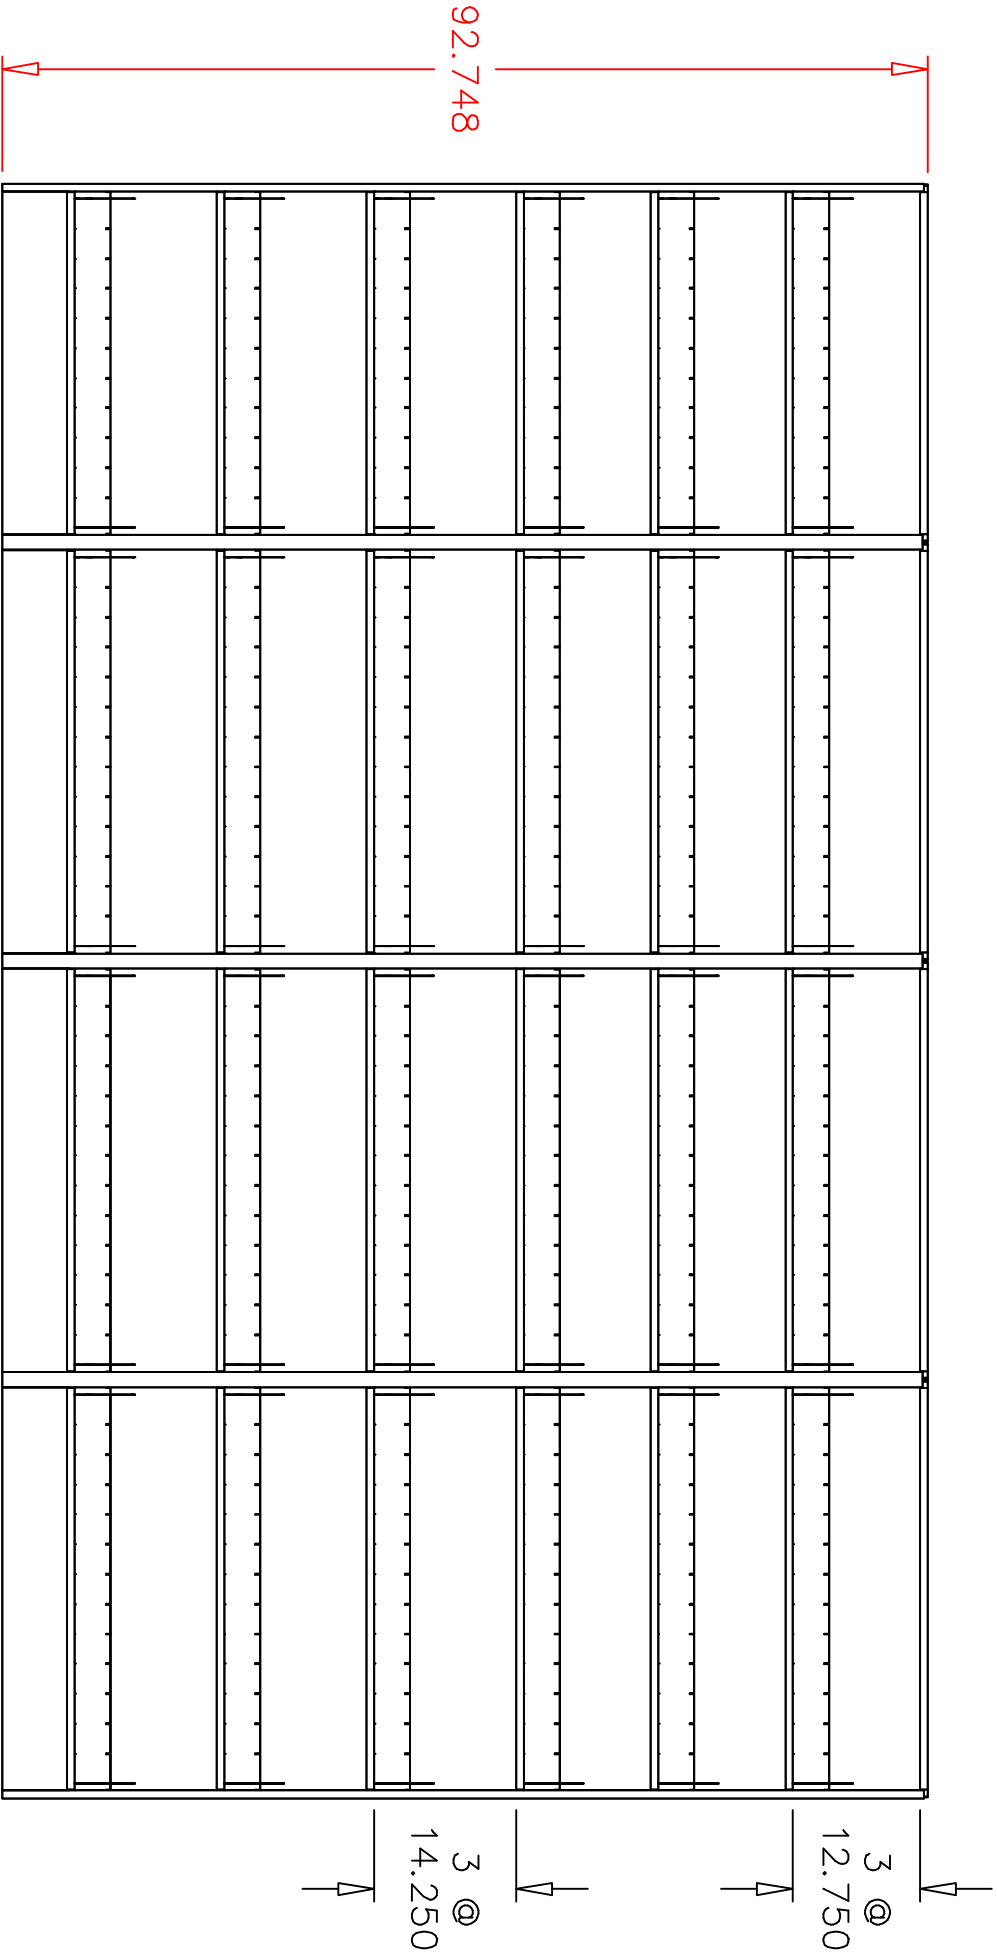

92" UPRIGHTS, 6-TIER 4-POST EXACT
SHELVING
ELEVATION VIEW


The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

BY: APRIL NASCENE		SAFCO®	3
PROJECT NUMBER: OP6394	DATE: 7/29/2026		
PROJECT NAME: DOH Vital Records			



18.000
MIN CLEARANCE
TO SPRINKLERS

71.831
+/-
LEVELING

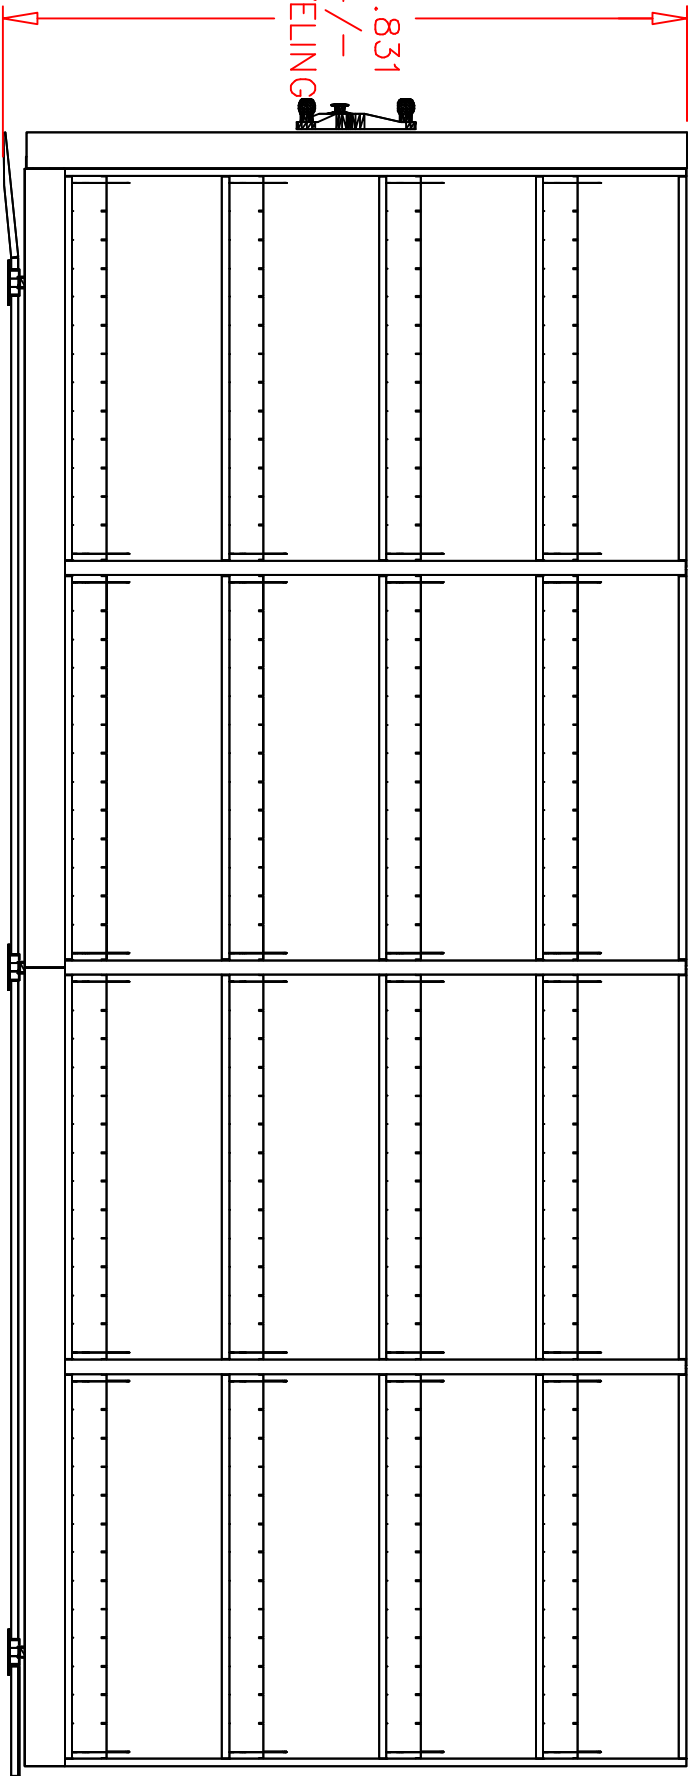

1
@
14.250
3
1 @
15.750



65" UPRIGHTS, 4-TIER 4-POST EXACT
SHELVING ON MOBILE 1000 SYSTEM
ELEVATION VIEW

BY: APRIL NASCENE


PROJECT NUMBER: OP6384

DATE: 7/29/2026

PROJECT NAME: DOH Vital Records

SAFCO®

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

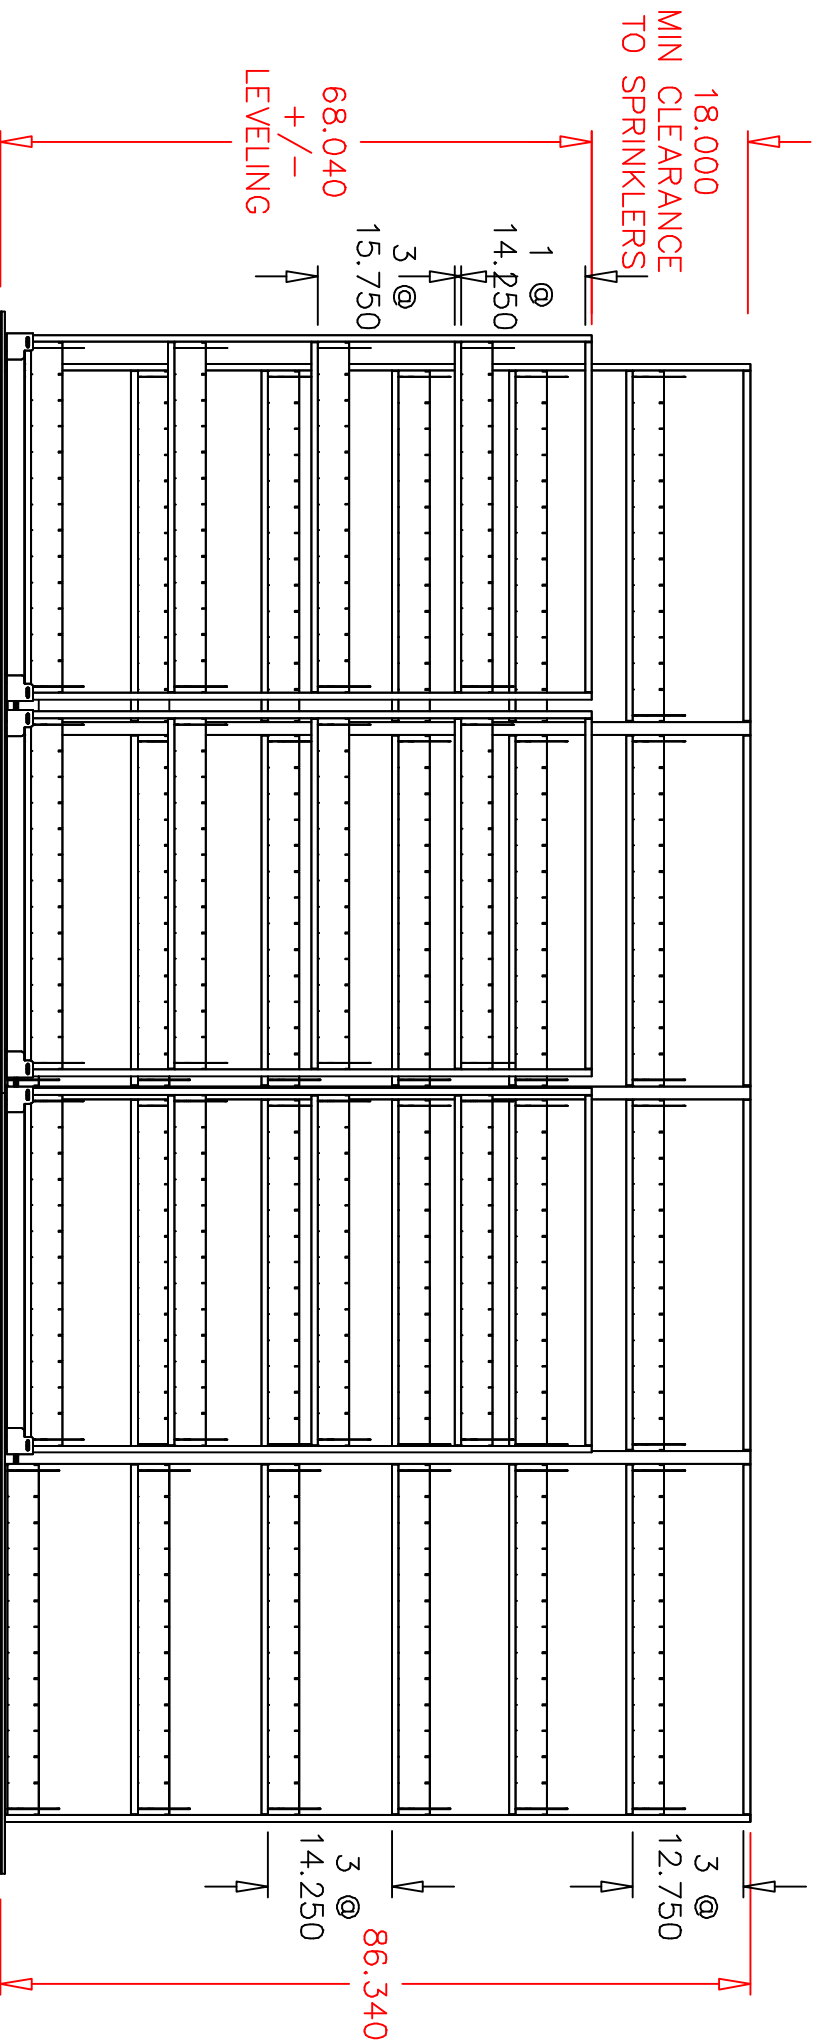

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

86" UPRIGHTS, 6-TIER & 65" UPRIGHTS, 4-TIER
4-POST EXACT SHELVING ON KWIK TRACK
ELEVATION VIEW

BY: APRIL NASCENE

PROJECT NUMBER: OP6384


DATE: 7/29/2026

PROJECT NAME: DOH Vital Records

SAFCO®

MOBILE AISLE 1000 SYSTEM - TRACK PLACEMENT

PREFERRED INSTALLATION IS ON SOLID FLOORING - CONCRETE/TILE
TRACK LEVELERS ALLOW FOR A MAXIMUM 3/4" ADJUSTMENT
DIMENSIONS SHOWN ARE CENTER-TO-CENTER

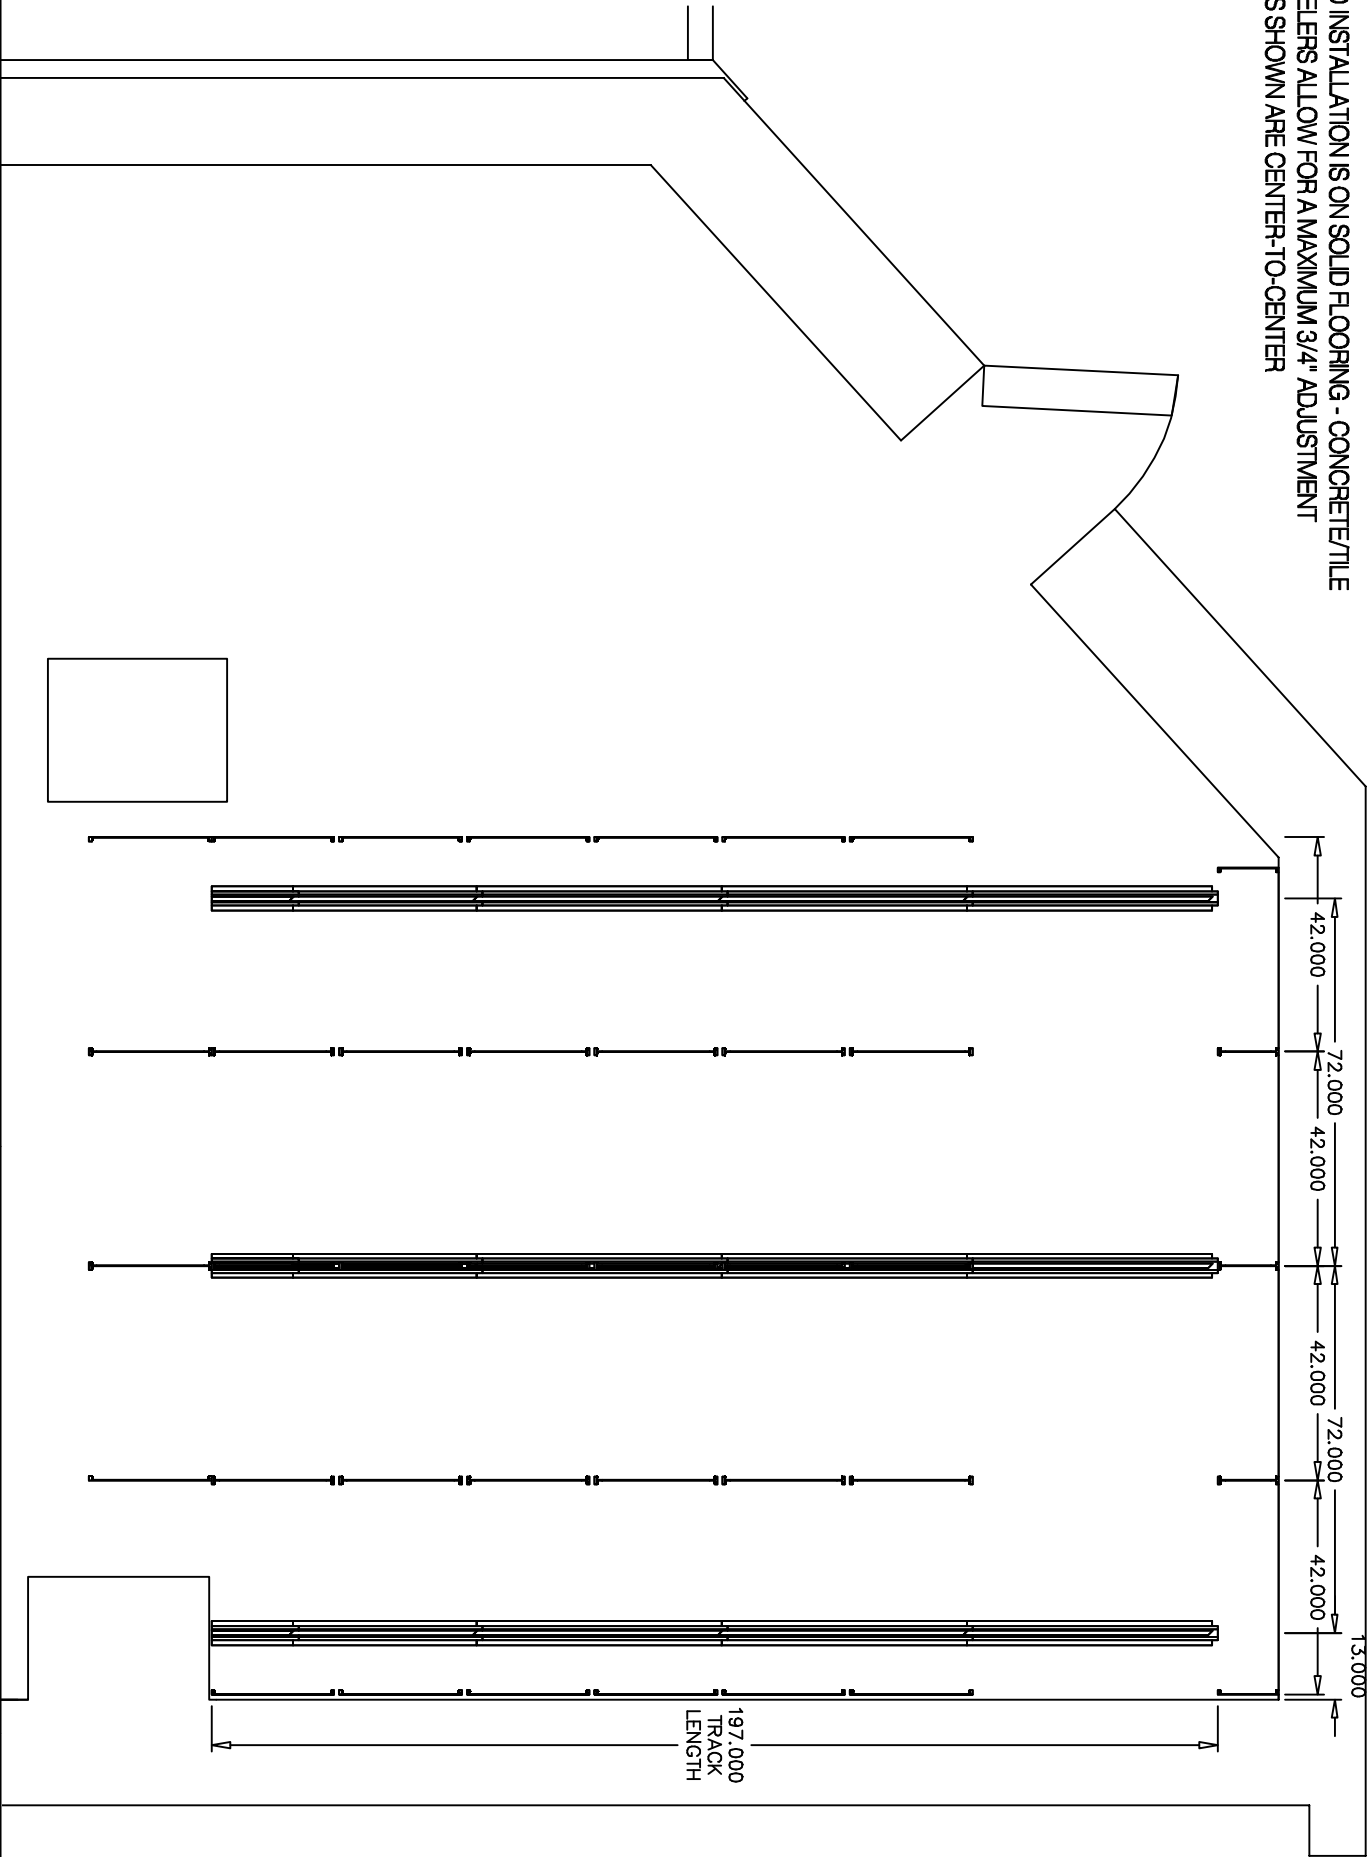

BY: APRIL NASCENE

PROJECT NUMBER: OP6384

DATE: 7/29/2026

PROJECT NAME: DOH Vital Records


SAFCO®

NOTE: ROOM DIMENSIONS, LOCATION OF LIGHT SWITCHES, OUTLETS, AND OTHER ELECTRICAL ENTITIES WILL NEED TO BE VERIFIED PRIOR TO ORDERING.

- 4-POST EXACT SHELVING ON MOBILE 1000 SYSTEM
- 86" UPRIGHTS, 6-TIER (FIXED) & 65" UPRIGHTS, 4-TIER (MOBILE)
- 18"D B5"H BINDING CASE STORAGE
- TOTAL LF: 1,625
- 2 DIVIDERS PER SHELF
- 500-LB CAPACITY (18"D ONLY)
- LETTER - BINDER/BOOK/BOX FILING
- TOTAL LF: 10,075
- 2 DIVIDERS PER SHELF
- CARPETED DECKING
- ADA RAMP

GRAND TOTAL LF: 11,700


- INSTALLATION START: PLEASE FOLLOW INSTALLATION NOTES BELOW, FOR INSTALLATION OF SHELF REINFORCEMENTS WHEN CAPACITY IS 500 POUNDS.
- * FOR EACH 48" WIDE SHELF, PLEASE INSTALL 3 SHELF REINFORCEMENTS, EVENLY SPACED, LEFT TO RIGHT WIDTH OF SHELF.
 - * FOR SHELVES 30" DEEP, PLEASE INSTALL 3 SHELF REINFORCEMENTS, EVENLY SPACED, LEFT TO RIGHT WIDTH OF SHELF.
 - * FOR SHELVES 24" DEEP OR LESS & 42" WIDE OR LESS, PLEASE INSTALL 2 SHELF REINFORCEMENTS, EVENLY SPACED.
- NOTE: SAFCO MOBILE 1000 SYSTEMS ARE BEST INSTALLED ON SOLID FLOORING LIKE CONCRETE OR CONCRETE W/ VCT TILE. REMOVAL OF CARPET IS STRONGLY RECOMMENDED. INSTALLATION ON CARPET SHOULD ONLY BE CONSIDERED IF UNPADDED AND LOW PROFILE.
- 4-POST SHELVES ADJUST IN 1.5" INCREMENTS & ARE .75" THICK

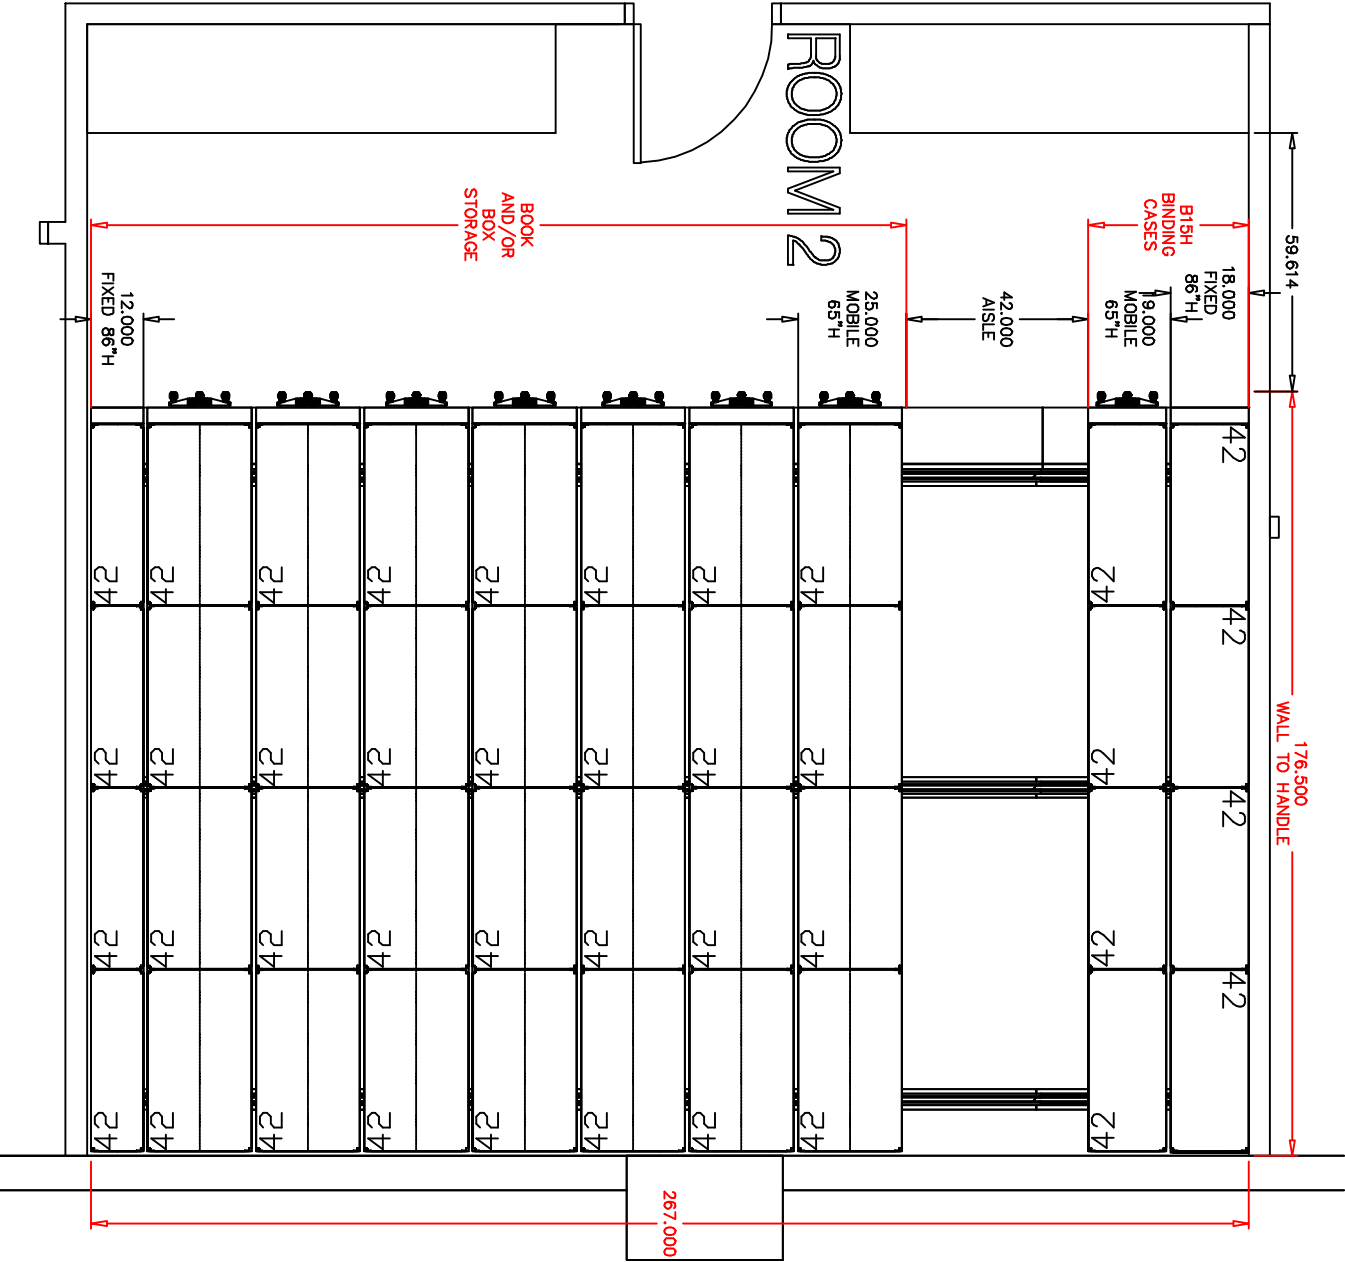

Authorized Signature _____ Date _____

Rev. Notes -

BY: APRIL NASCENE	DATE: 7/29/2026	SAFCO®
PROJECT NUMBER: OP6394	PROJECT NAME: DOH Vital Records	
		7

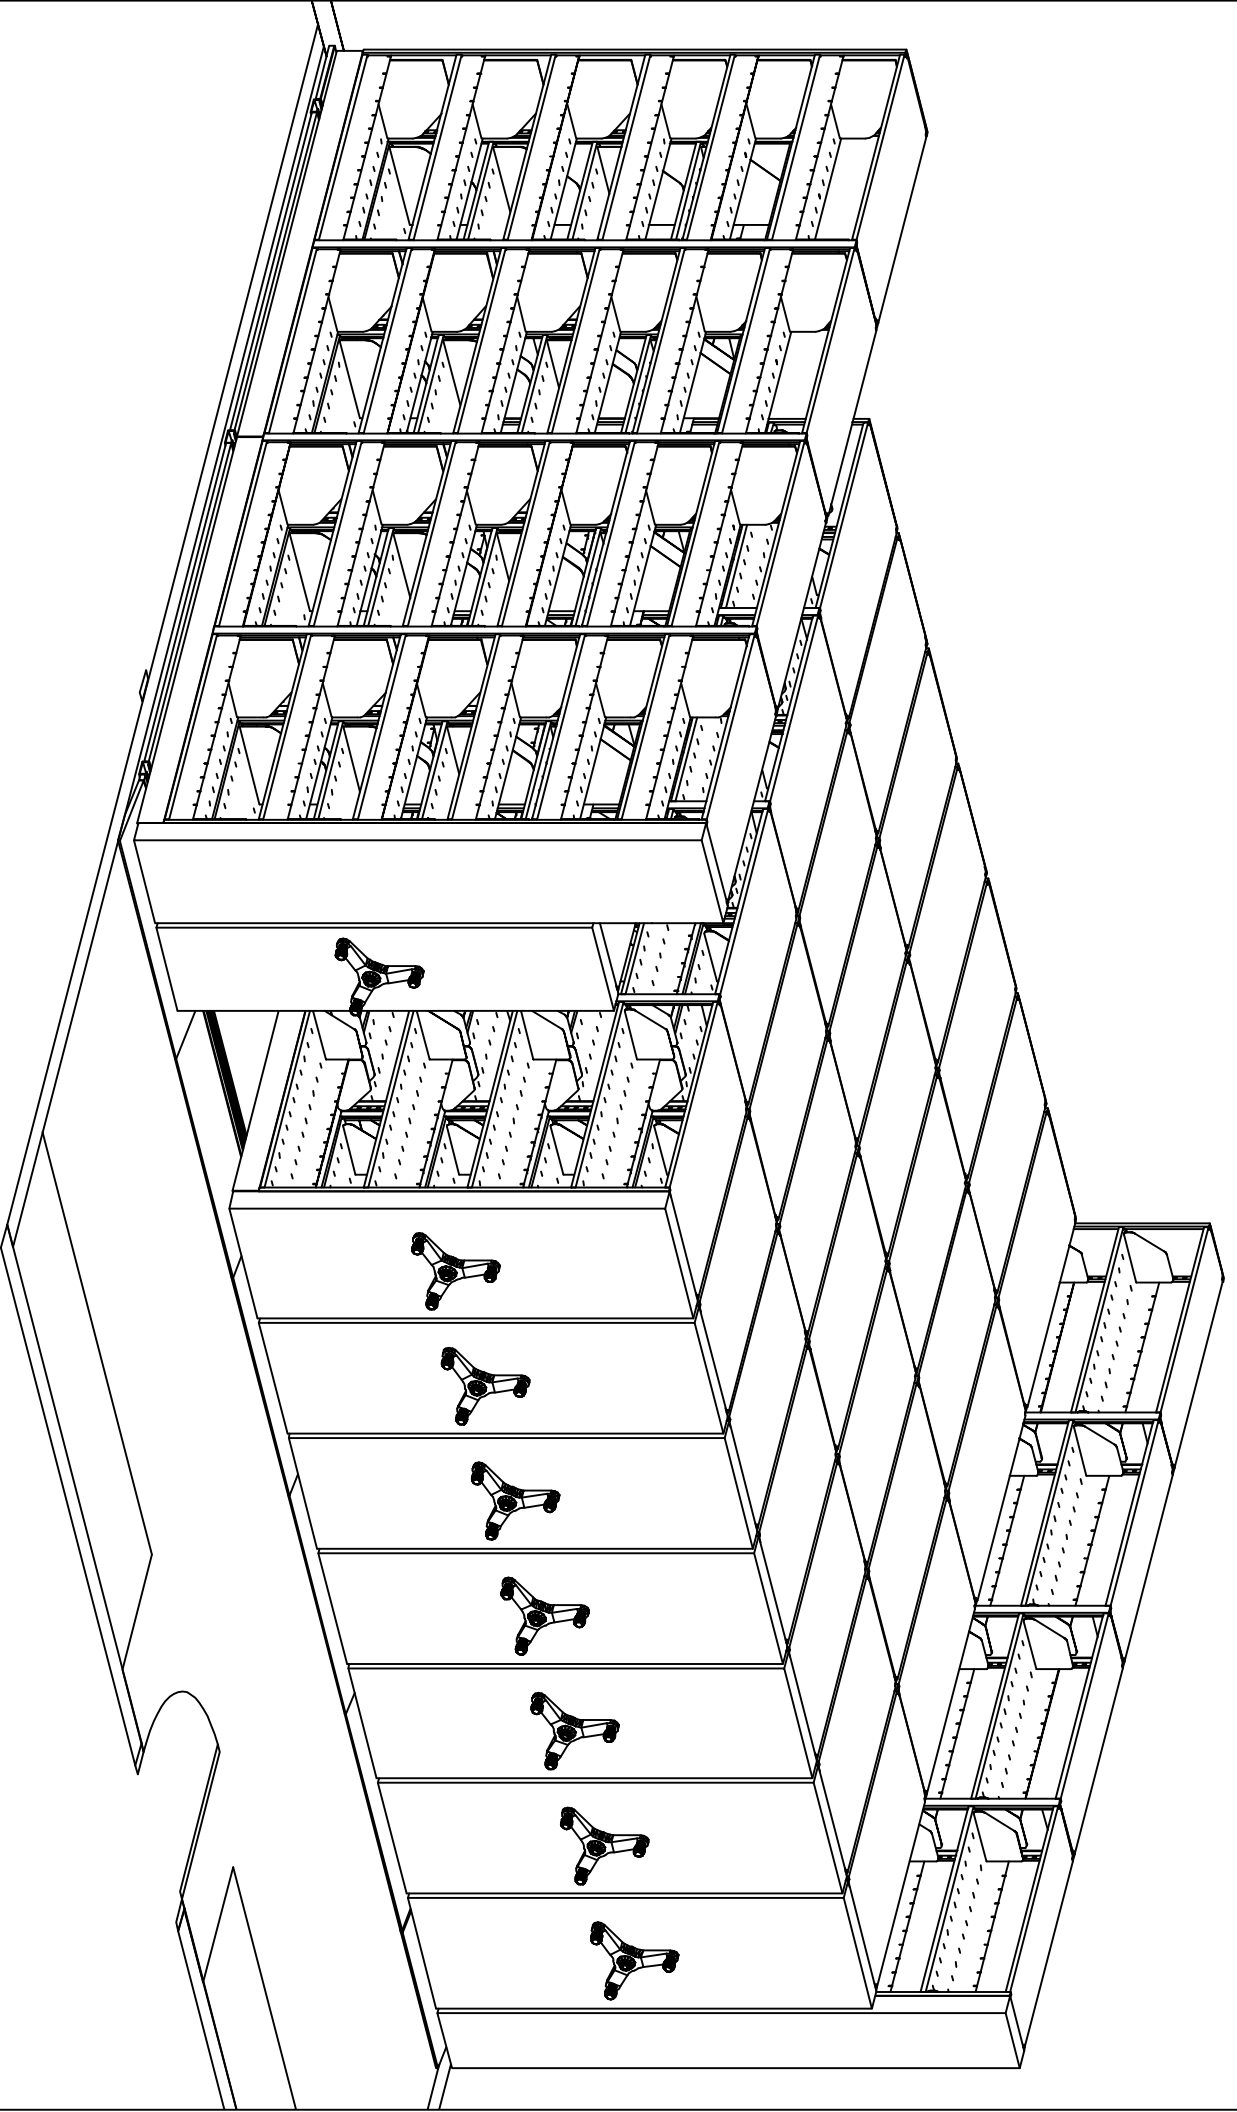


BY: APRIL NASCENE

PROJECT NUMBER: OP6394

DATE: 7/29/2026


PROJECT NAME: DOH Vital Records

SAFCO

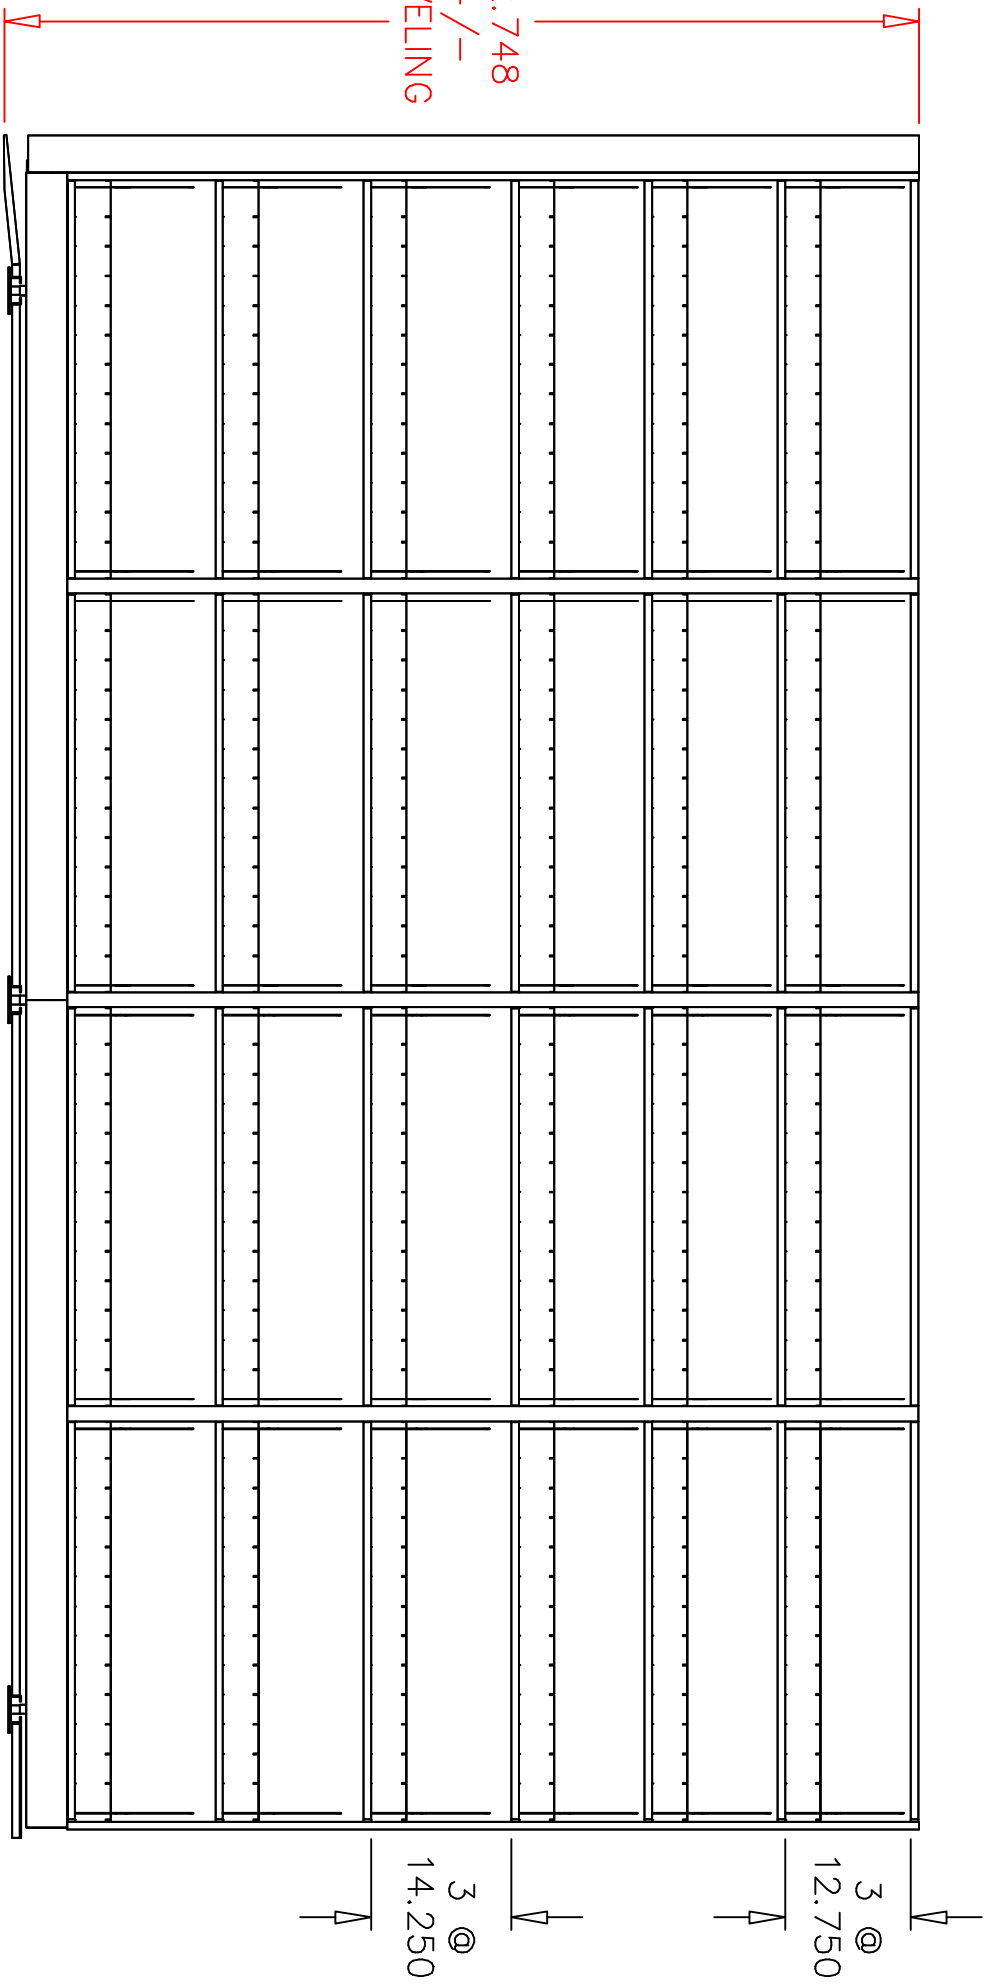

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

86" UPRIGHTS, 6-TIER 4-POST EXACT
SHELVING (18"D) ON MOBILE 1000 SYSTEM
ELEVATION VIEW

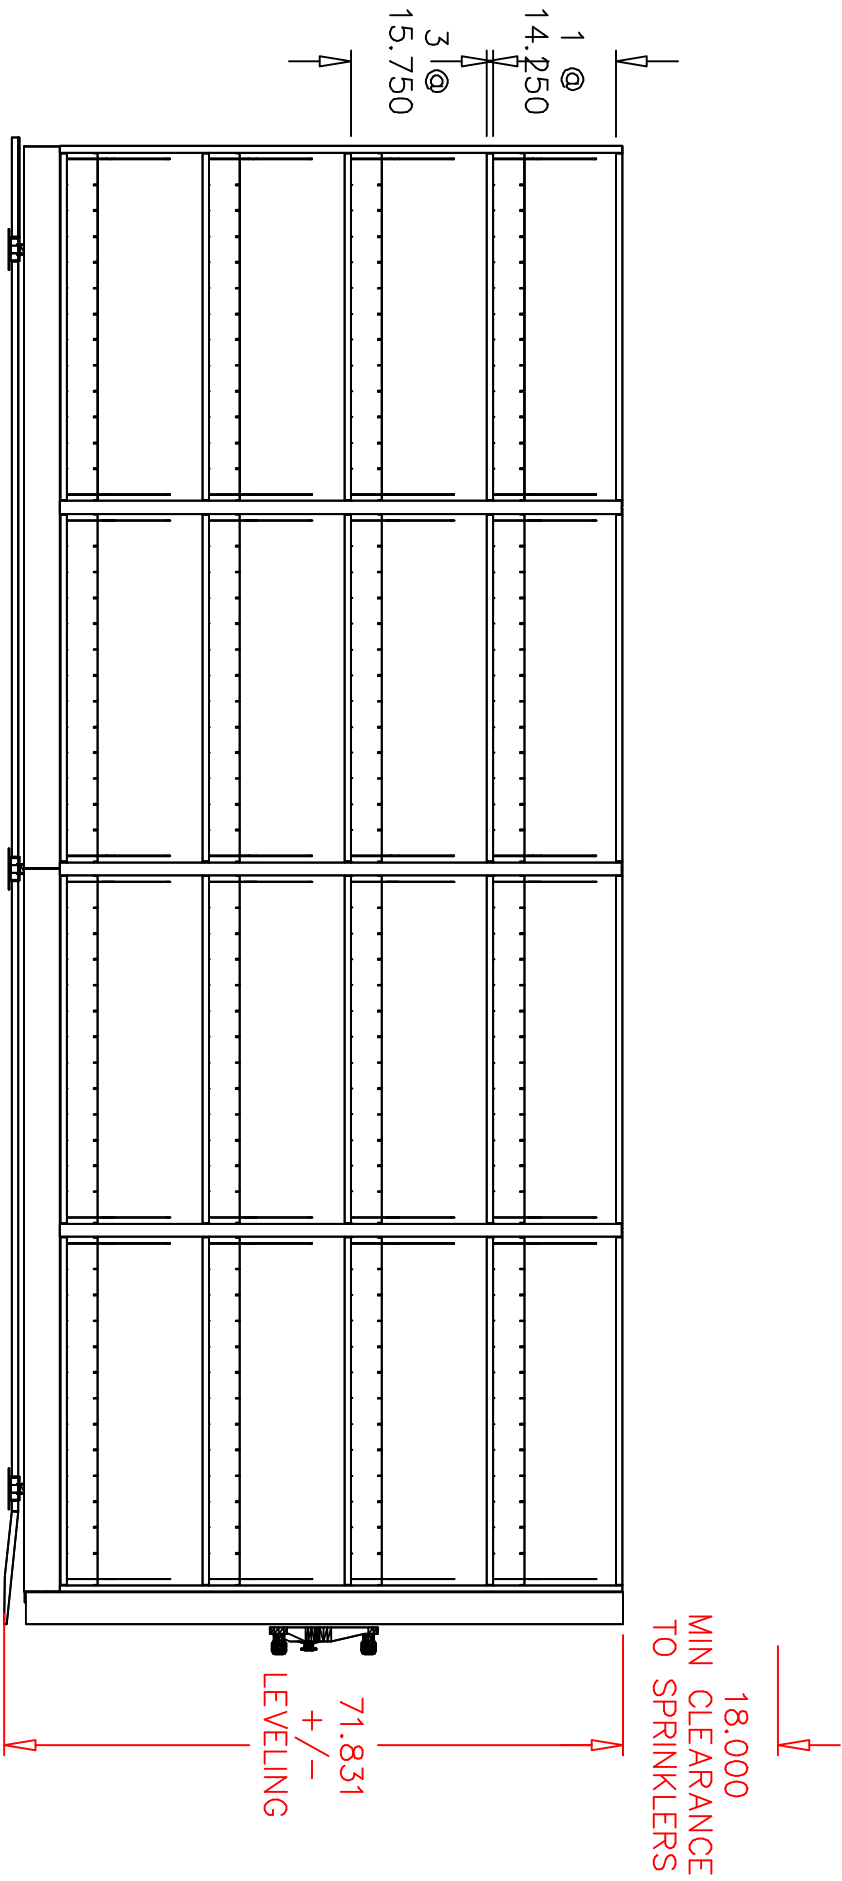


65" UPRIGHTS, 4-TIER 4-POST EXACT
SHELVING (18"D) ON MOBILE 1000 SYSTEM
ELEVATION VIEW

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

BY: APRIL NASCENE		SAFCO®	10
PROJECT NUMBER: OP6394	DATE: 7/29/2026		
PROJECT NAME: DOH Vital Records			


18.000
MIN CLEARANCE
TO SPRINKLERS

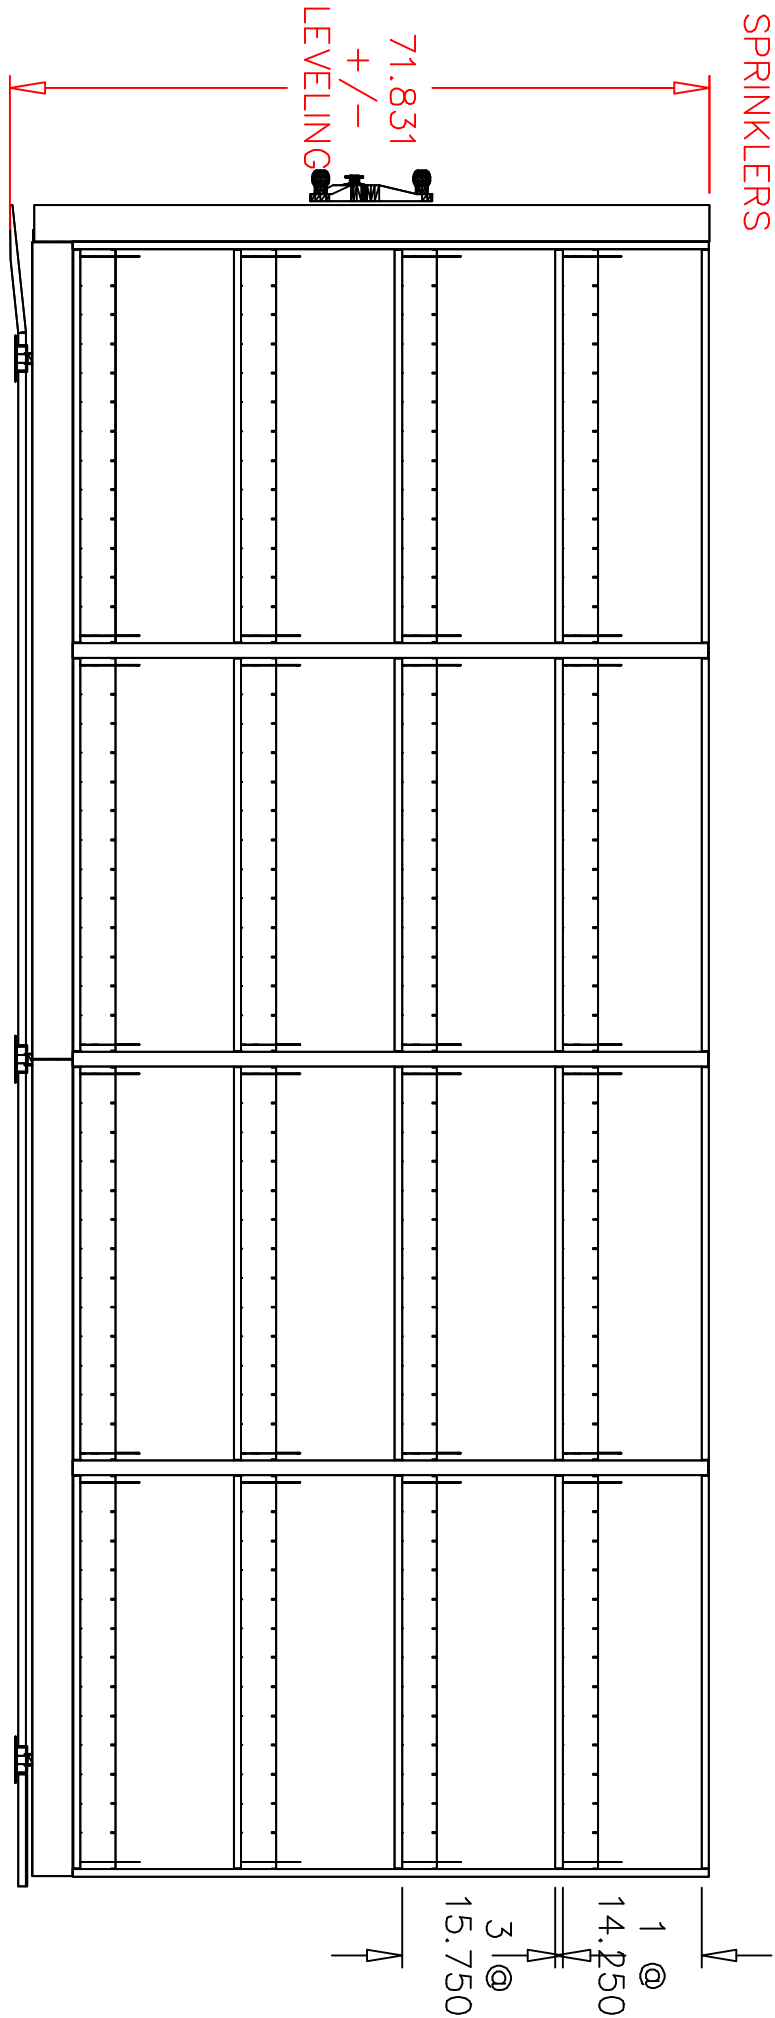

65" UPRIGHTS, 4-TIER 4-POST EXACT
SHELVING (24"D) ON MOBILE 1000 SYSTEM
ELEVATION VIEW

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

BY: APRIL NASCENE		SAFCO®
PROJECT NUMBER: OP6384	DATE: 7/29/2026	
PROJECT NAME: DOH Vital Records		11

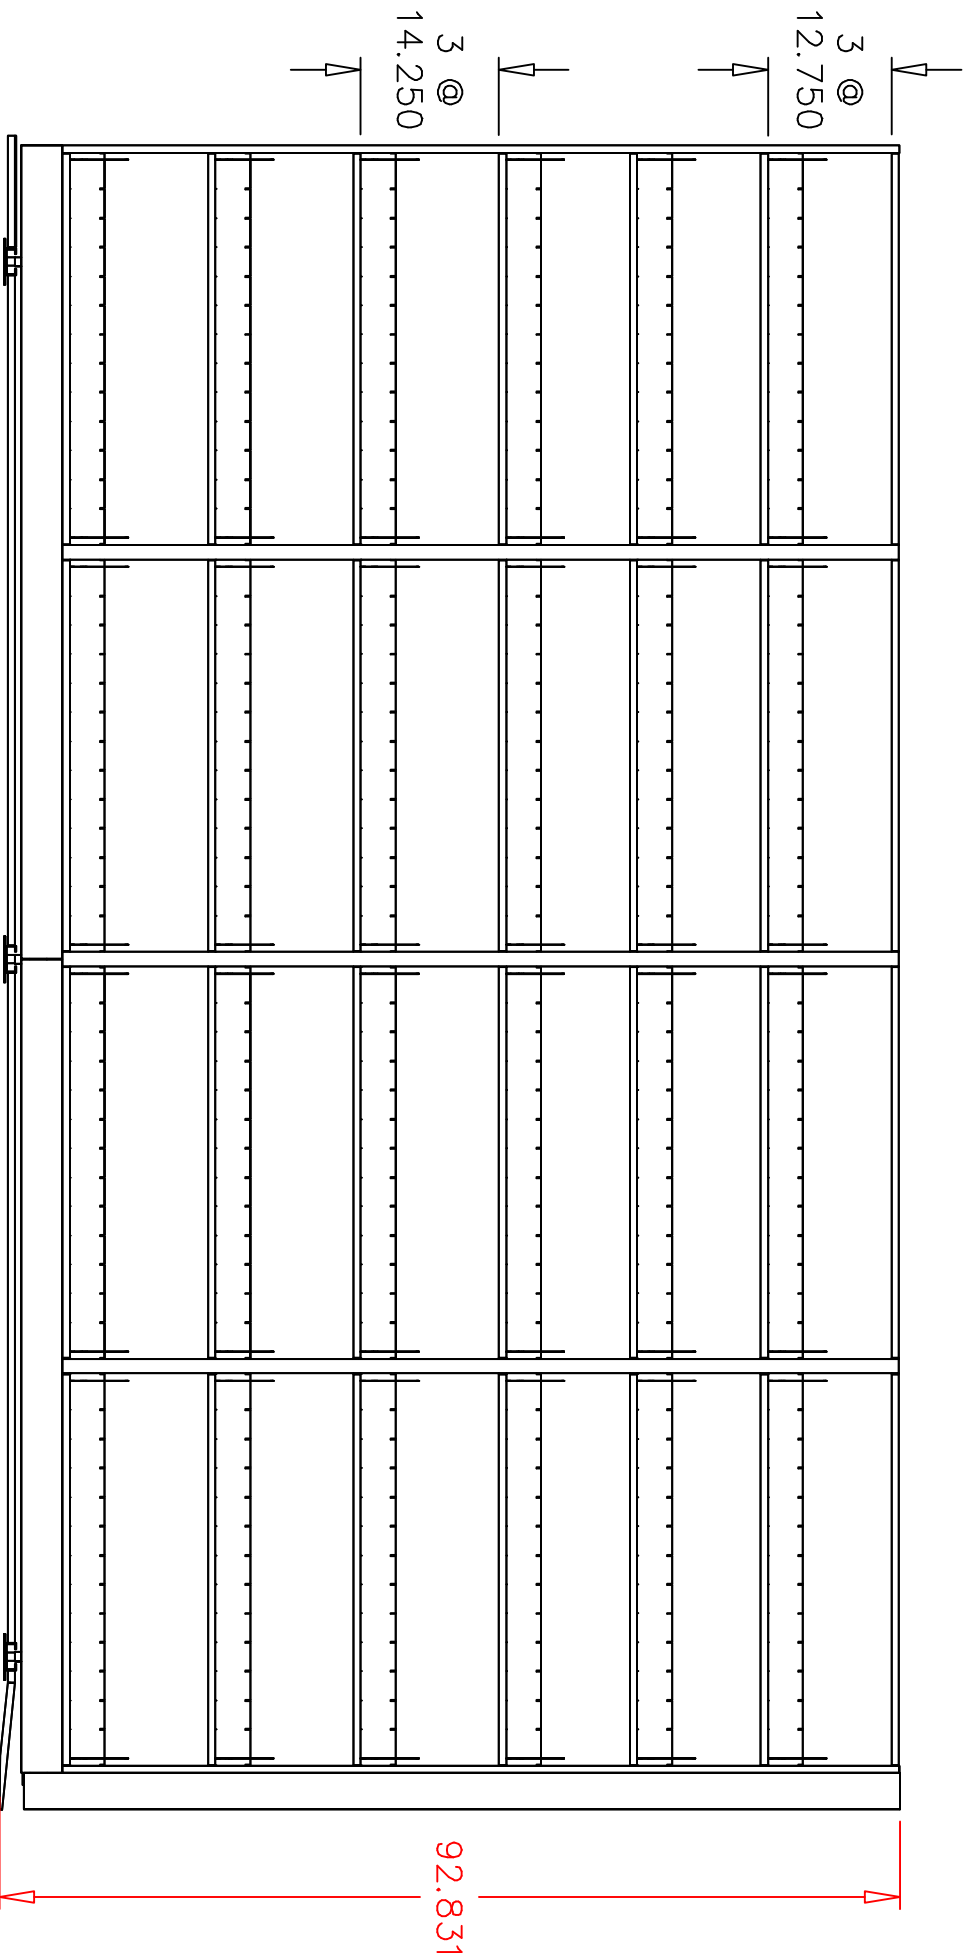

86" UPRIGHTS, 6-TIER 4-POST EXACT
SHELVING (12"D) ON MOBILE 1000 SYSTEM
ELEVATION VIEW

The overall equipment height specified does not include system leveling. A minimum 3" clearance is required between product and ceiling/obstructions. This allows for leveling adjustments. A minimum of 18" between shelving equipment and sprinkler heads is required when sprinkler systems are installed. It is the customer's responsibility to check with the municipality of installation for code requirements.

BY: APRIL NASCENE		SAFCO®
PROJECT NUMBER: OP6384	DATE: 7/29/2026	
PROJECT NAME: DOH Vital Records		12